SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RS140 (Intel Xeon E3-1285 v3, 3.60 GHz)

SPECint®_rate2006 = 219

SPECint_rate_base2006 = 212

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: Apr-2014
Hardware Availability: Jun-2014
Software Availability: Apr-2014

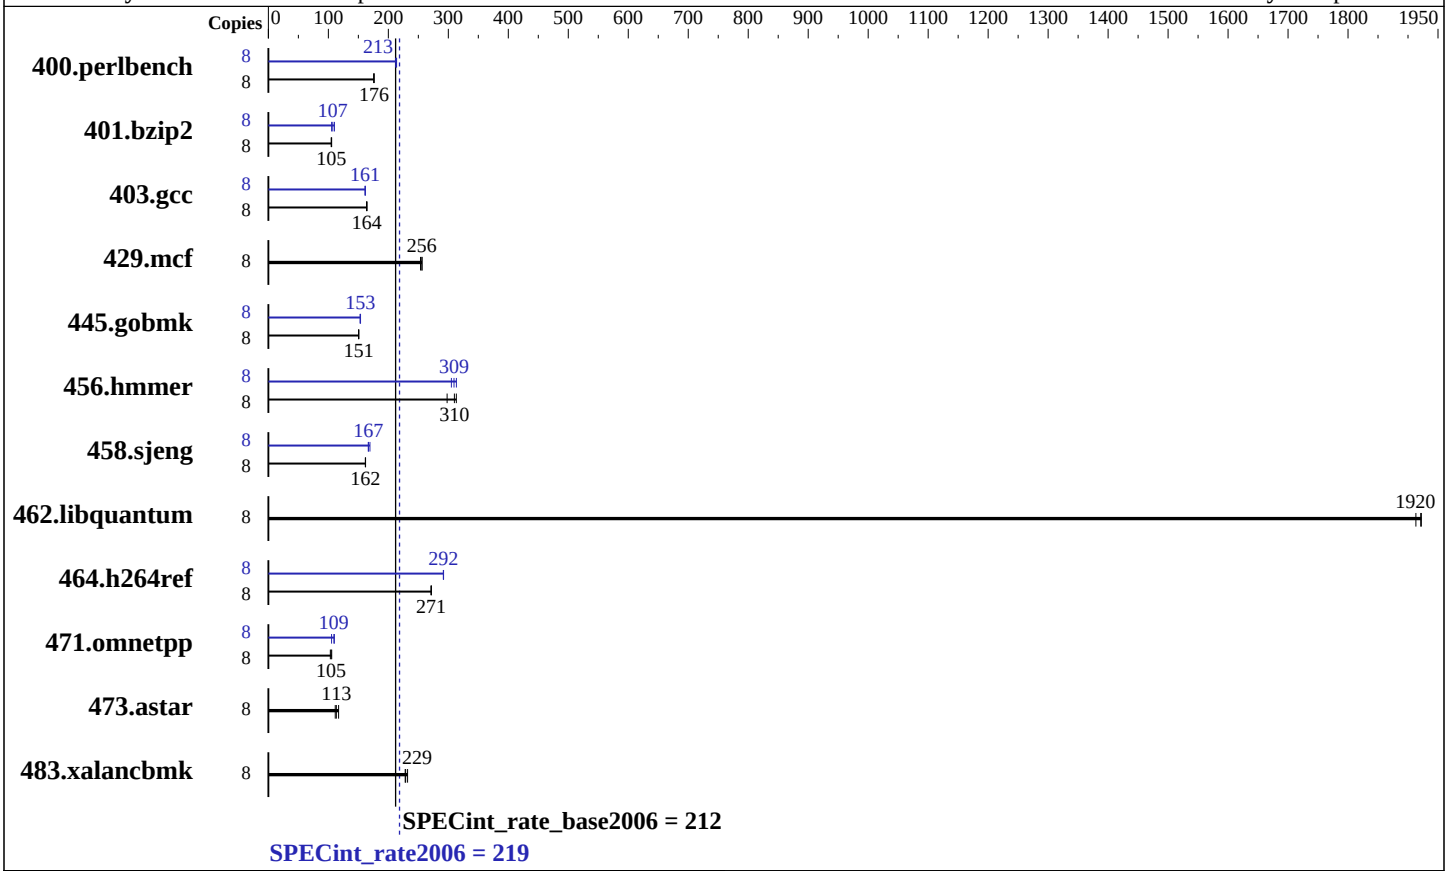

Hardware

CPU Name:	Intel Xeon E3-1285 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 4.00 GHz
CPU MHz:	3600
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	16 GB (2 x 8 GB 2Rx8 PC3L-12800E-11, ECC)
Disk Subsystem:	1 x 240 GB SATA SSD
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RS140 (Intel Xeon E3-1285 v3, 3.60 GHz)

SPECint_rate2006 = 219

SPECint_rate_base2006 = 212

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: Lenovo Group Limited

Test date: Apr-2014
Hardware Availability: Jun-2014
Software Availability: Apr-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	445	176	444	176	**444**	**176**	8	366	214	**366**	**213**	368	212
401.bzip2	8	736	105	**735**	**105**	732	106	8	701	110	**719**	**107**	733	105
403.gcc	8	**393**	**164**	393	164	392	164	8	398	162	399	161	**399**	**161**
429.mcf	8	**285**	**256**	285	256	288	254	8	**285**	**256**	285	256	288	254
445.gobmk	8	557	151	558	150	**557**	**151**	8	549	153	**547**	**153**	546	154
456.hmmer	8	**241**	**310**	238	313	250	298	8	245	305	238	313	**241**	**309**
458.sjeng	8	599	162	**598**	**162**	597	162	8	581	167	572	169	**580**	**167**
462.libquantum	8	**86.3**	**1920**	86.6	1910	86.2	1920	8	**86.3**	**1920**	86.6	1910	86.2	1920
464.h264ref	8	651	272	**652**	**271**	652	271	8	607	292	**606**	**292**	606	292
471.omnetpp	8	**478**	**105**	474	106	484	103	8	475	105	**458**	**109**	455	110
473.astar	8	504	111	**496**	**113**	480	117	8	504	111	**496**	**113**	480	117
483.xalancbmk	8	242	228	238	232	**241**	**229**	8	242	228	238	232	**241**	**229**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The taskset mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate taskset commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
ICE Performance Modes set to Full Speed
Sysinfo program /usr/cpu2006/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on RS140 Wed Apr 23 23:43:31 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E3-1285 v3 @ 3.60GHz
      1 "physical id"s (chips)
      8 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
```

Continued on next page

Platform Notes (Continued)

```
        cpu cores : 4
        siblings  : 8
        physical 0: cores 0 1 2 3
     cache size : 8192 KB

  From /proc/meminfo
     MemTotal:       16219472 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     Red Hat Enterprise Linux Server release 6.5 (Santiago)

  From /etc/*release* /etc/*version*
     redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
     system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

  uname -a:
     Linux RS140 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64
     x86_64 x86_64 GNU/Linux

  run-level 3 Apr 23 23:42

  SPEC is set to: /usr/cpu2006
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda2      ext4  217G   30G  176G  15% /

  Additional information from dmidecode:
    BIOS LENOVO FBKT75CUS 03/24/2014
    Memory:
     2x   8 GB
     2x Samsung M391B1G73QH0-YK0 8 GB 1600 MHz 2 rank
     2x [Empty] [Empty]

  (End of data from sysinfo program)
  RS140 support 2 channels and 2 DIMMs per channel, total 4 DIMMs.
  2 DIMM slots installed with 8 GB DIMM for this run.
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

  Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
  memory using RedHat EL 6.4
  Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

Continued on next page

Peak Compiler Invocation (Continued)

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

471.omnetpp: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html`
`http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-revB.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml`
`http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-revB.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 22:46:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 June 2014.