# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3950 X6
(Intel Xeon E7-8870 v2, 2.30 GHz)

SPECint®_rate2006 = 3960

SPECint_rate_base2006 = 3830

**CPU2006 license:** 11
**Test sponsor:** IBM Corporation
**Tested by:** IBM Corporation

**Test date:** May-2014
**Hardware Availability:** Jun-2014
**Software Availability:** Nov-2013

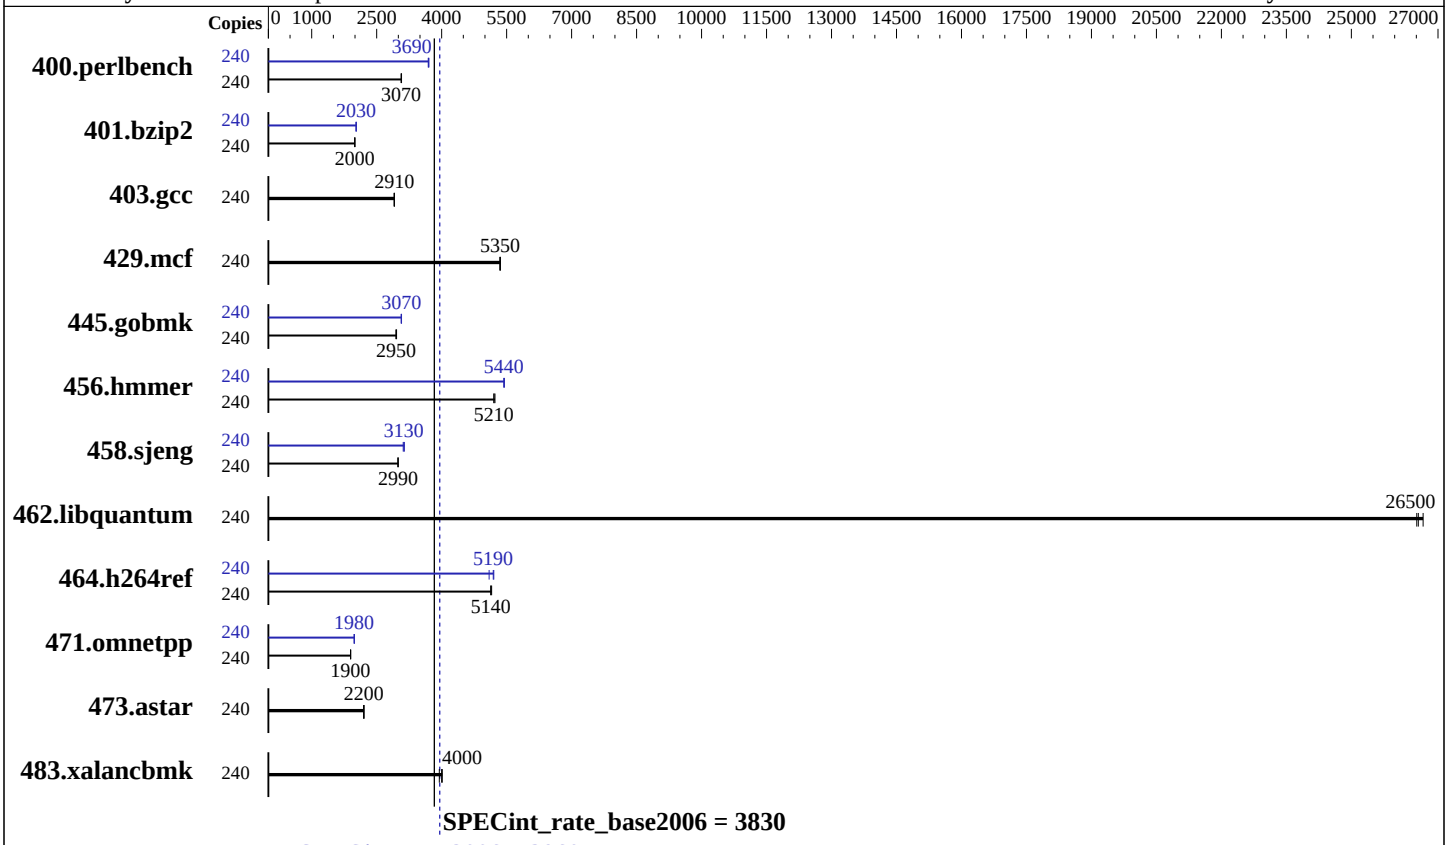


### Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon E7-8870 v2 |
| CPU Characteristics: | Intel Turbo Boost Technology up to 2.90 GHz |
| CPU MHz: | 2300 |
| FPU: | Integrated |
| CPU(s) enabled: | 120 cores, 8 chips, 15 cores/chip, 2 threads/core |
| CPU(s) orderable: | 4,6,8 chips |
| Primary Cache: | 32 KB I + 32 KB D on chip per core |
| Secondary Cache: | 256 KB I+D on chip per core |
| L3 Cache: | 30 MB I+D on chip per chip |
| Other Cache: | None |
| Memory: | 2 TB (128 x 16 GB 2Rx4 PC3L-12800R-11, ECC, running at 1333 MHz) |
| Disk Subsystem: | 1 x 400 GB SATA, SSD |
| Other Hardware: | None |

### Software

| | |
|---|---|
| Operating System: | Red Hat Enterprise Linux Server release 6.5 (Santiago)<br>2.6.32-431.el6.x86_64 |
| Compiler: | C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux |
| Auto Parallel: | No |
| File System: | ext4 |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 32-bit |
| Peak Pointers: | 32/64-bit |
| Other Software: | Microquill SmartHeap V10.0 |

# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3950 X6
(Intel Xeon E7-8870 v2, 2.30 GHz)

SPECint_rate2006 = 3960

SPECint_rate_base2006 = 3830

**CPU2006 license:** 11
**Test sponsor:** IBM Corporation
**Tested by:** IBM Corporation

**Test date:** May-2014
**Hardware Availability:** Jun-2014
**Software Availability:** Nov-2013

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 240 | 763 | 3070 | 765 | 3070 | **765** | **3070** | 240 | 635 | 3690 | 633 | 3710 | **635** | **3690** |
| 401.bzip2 | 240 | 1162 | 1990 | 1160 | 2000 | **1161** | **2000** | 240 | 1142 | 2030 | 1144 | 2020 | **1143** | **2030** |
| 403.gcc | 240 | 664 | 2910 | 666 | 2900 | **664** | **2910** | 240 | 664 | 2910 | 666 | 2900 | **664** | **2910** |
| 429.mcf | 240 | 410 | 5340 | 409 | 5360 | **409** | **5350** | 240 | 410 | 5340 | 409 | 5360 | **409** | **5350** |
| 445.gobmk | 240 | **854** | **2950** | 854 | 2950 | 851 | 2960 | 240 | 819 | 3070 | 821 | 3070 | **820** | **3070** |
| 456.hmmer | 240 | 430 | 5210 | **430** | **5210** | 428 | 5230 | 240 | 412 | 5440 | **412** | **5440** | 411 | 5450 |
| 458.sjeng | 240 | **970** | **2990** | 971 | 2990 | 969 | 3000 | 240 | 925 | 3140 | **928** | **3130** | 933 | 3110 |
| 462.libquantum | 240 | **187** | **26500** | 188 | 26500 | 187 | 26700 | 240 | **187** | **26500** | 188 | 26500 | 187 | 26700 |
| 464.h264ref | 240 | **1034** | **5140** | 1034 | 5140 | 1031 | 5150 | 240 | 1021 | 5200 | **1023** | **5190** | 1042 | 5100 |
| 471.omnetpp | 240 | 791 | 1900 | **790** | **1900** | 790 | 1900 | 240 | 757 | 1980 | **756** | **1980** | 756 | 1980 |
| 473.astar | 240 | 763 | 2210 | 767 | 2200 | **764** | **2200** | 240 | 763 | 2210 | 767 | 2200 | **764** | **2200** |
| 483.xalancbmk | 240 | 420 | 3950 | 413 | 4010 | **414** | **4000** | 240 | 420 | 3950 | 413 | 4010 | **414** | **4000** |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Platform Notes

```
Operating Mode set to Maximum Perfomance in BIOS
Memory Data Scrambling Disabled
Patrol Scrub Disabled
Sysinfo program /cpu2006.1.2_14_aug2013/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on x3950x6 Fri May 23 10:57:20 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E7-8870 v2 @ 2.30GHz
      8 "physical id"s (chips)
      240 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
```

Continued on next page

## Platform Notes (Continued)

```
      caution.)
         cpu cores : 15
         siblings  : 30
         physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
         physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
         physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
         physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
         physical 4: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
         physical 5: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
         physical 6: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
         physical 7: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
      cache size : 30720 KB

   From /proc/meminfo
      MemTotal:       2117446648 kB
      HugePages_Total:       0
      Hugepagesize:       2048 kB

   /usr/bin/lsb_release -d
      Red Hat Enterprise Linux Server release 6.5 (Santiago)

   From /etc/*release* /etc/*version*
      redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
      system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
      system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

   uname -a:
      Linux x3950x6 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
      x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 May 23 10:47

   SPEC is set to: /cpu2006.1.2_14_aug2013
      Filesystem                     Type  Size  Used Avail Use% Mounted on
      /dev/mapper/vg_x3950x6-lv_root ext4  357G  8.3G  331G   3% /

   Additional information from dmidecode:
     BIOS IBM -[A8E107JUS-1.00]- 05/02/2014
     Memory:
      64x Hynix HMT42GR7AFR4A-PB 16 GB 1333 MHz 2 rank
      64x NO DIMM Unknown
      64x Samsung M393B2G70QH0-YK0 16 GB 1333 MHz 2 rank

   (End of data from sysinfo program)
  Memory speed from dmidecode lists the downclocked speed of the run.
```

## General Notes

```
  Environment variables set by runspec before the start of the run:
  LD_LIBRARY_PATH = "/cpu2006.1.2_14_aug2013/libs/32:/cpu2006.1.2_14_aug2013/libs/64:/cpu2006.1.2_14_aug2013/sh"
```

Continued on next page

## General Notes (Continued)

```
Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1>       /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:
```
icc  -m32
```

C++ benchmarks:
```
icpc -m32
```

## Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

## Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap
```

## Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc  -m32
```

Continued on next page

## Peak Compiler Invocation (Continued)

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

Continued on next page

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml


SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 23:42:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 June 2014.