SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei
Huawei CH140

SPECfp®_rate2006 = 668

SPECfp_rate_base2006 = 649

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: May-2014
Hardware Availability: Sep-2013
Software Availability: Nov-2013

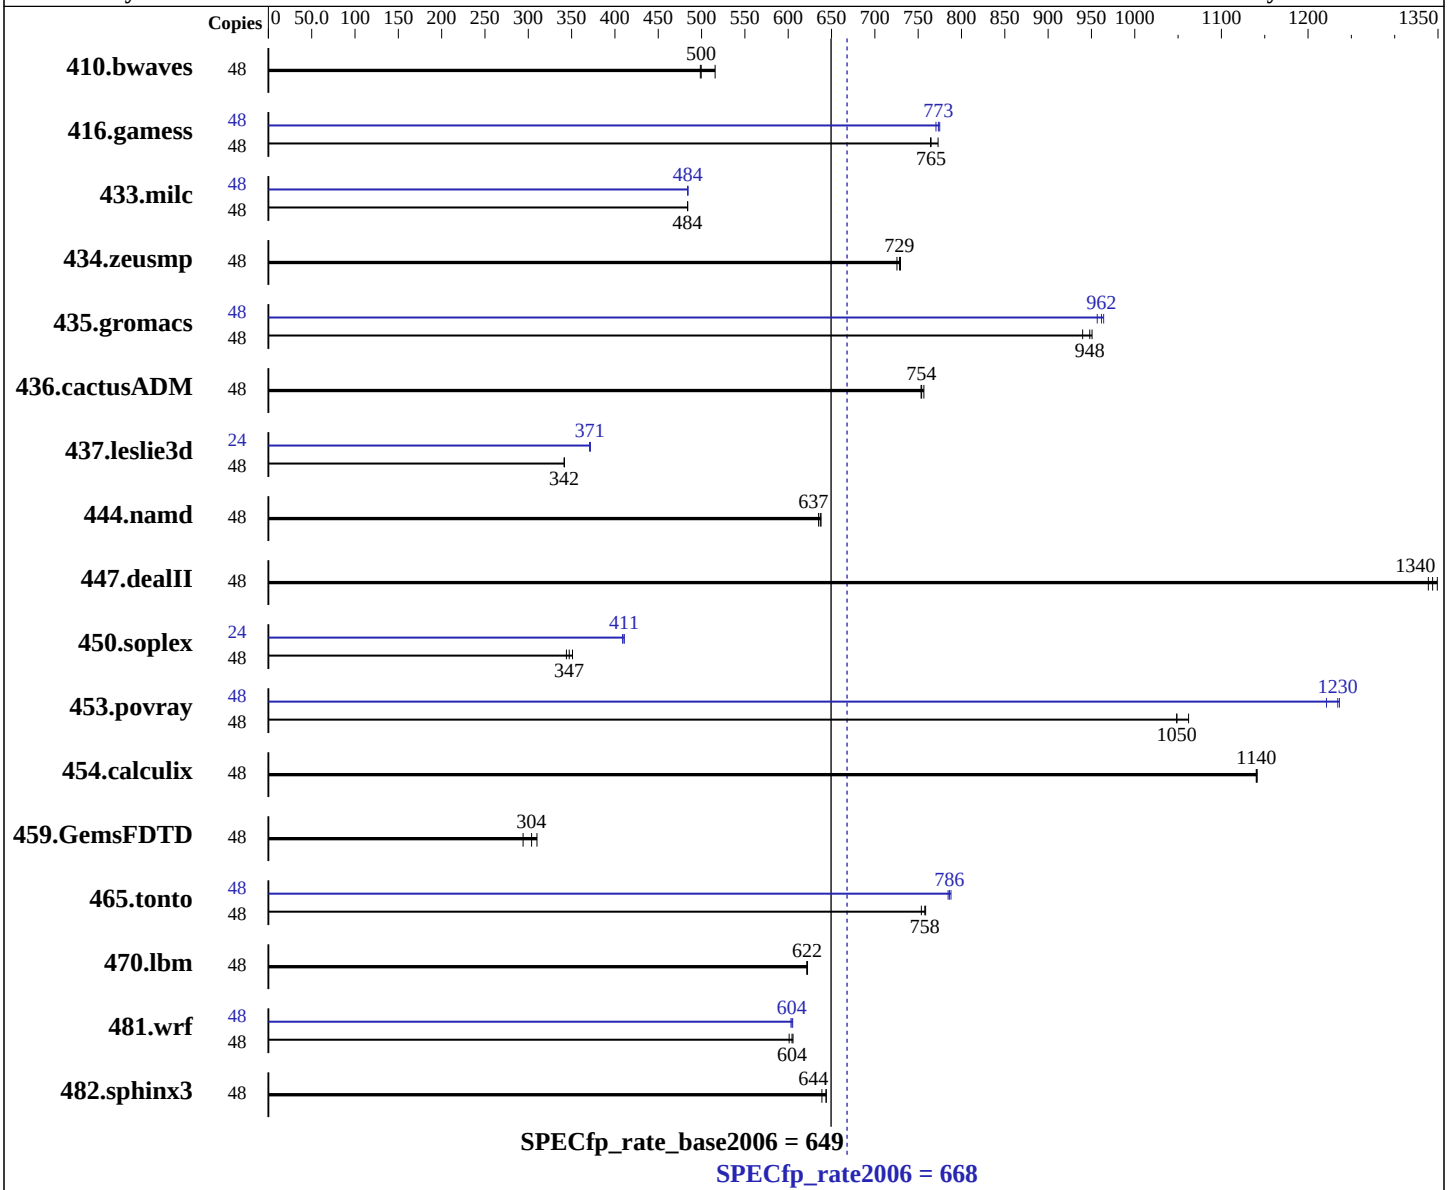

Hardware

CPU Name:	Intel Xeon E5-2697 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.50 GHz
CPU MHz:	2700
FPU:	Integrated
CPU(s) enabled:	24 cores, 2 chips, 12 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext3

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei
Huawei CH140

SPECfp_rate2006 = 668

SPECfp_rate_base2006 = 649

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: May-2014
Hardware Availability: Sep-2013
Software Availability: Nov-2013

L3 Cache: 30 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (8 x 16 GB 2Rx4 PC3-14900R-13,ECC)
Disk Subsystem: 1 X 500 GB SATA 7200RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	1265	516	1308	499	**1306**	**500**	48	1265	516	1308	499	**1306**	**500**
416.gamess	48	1230	764	**1229**	**765**	1216	773	48	1220	771	1213	775	**1215**	**773**
433.milc	48	911	484	**911**	**484**	911	484	48	**910**	**484**	910	484	911	484
434.zeusmp	48	602	726	599	730	**600**	**729**	48	602	726	599	730	**600**	**729**
435.gromacs	48	365	940	360	951	**361**	**948**	48	355	964	**356**	**962**	358	957
436.cactusADM	48	**761**	**754**	758	757	761	753	48	**761**	**754**	758	757	761	753
437.leslie3d	48	1322	341	**1321**	**342**	1320	342	24	607	372	**608**	**371**	608	371
444.namd	48	606	635	603	638	**604**	**637**	48	606	635	603	638	**604**	**637**
447.dealII	48	**409**	**1340**	410	1340	407	1350	48	**409**	**1340**	410	1340	407	1350
450.soplex	48	1140	351	**1153**	**347**	1164	344	24	490	409	487	411	**488**	**411**
453.povray	48	244	1050	**244**	**1050**	240	1060	48	209	1220	**207**	**1230**	207	1240
454.calculix	48	**347**	**1140**	347	1140	347	1140	48	**347**	**1140**	347	1140	347	1140
459.GemsFDTD	48	**1676**	**304**	1643	310	1732	294	48	**1676**	**304**	1643	310	1732	294
465.tonto	48	**623**	**758**	627	754	623	759	48	**601**	**786**	599	788	602	785
470.lbm	48	1060	622	**1061**	**622**	1061	622	48	1060	622	**1061**	**622**	1061	622
481.wrf	48	885	606	892	601	**887**	**604**	48	886	605	889	603	**887**	**604**
482.sphinx3	48	1464	639	1453	644	**1454**	**644**	48	1464	639	1453	644	**1454**	**644**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Set Power Efficiency Mode to Performance
Sysinfo program /spec/config/sysinfo.rev6818
```

Continued on next page

Platform Notes (Continued)

```
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on localhost Thu May 29 23:19:40 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2697 v2 @ 2.70GHz
      2 "physical id"s (chips)
      48 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 12
      siblings  : 24
      physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
      physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
   cache size : 30720 KB

From /proc/meminfo
   MemTotal:       132114848 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*
   redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
   system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
   Linux localhost 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
   x86_64 x86_64 x86_64 GNU/Linux

run-level 3 May 29 11:15

SPEC is set to: /spec
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda2      ext3  455G   65G  368G  15% /

Additional information from dmidecode:
  BIOS Insyde Corp. OARYV388 04/23/2014
  Memory:
   8x Samsung M393B2G70BH0-CMA 16 GB 1866 MHz 2 rank

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RedHat EL 6.4
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
     444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
     465.tonto: -DSPEC_CPU_LP64
      470.lbm: -DSPEC_CPU_LP64
      481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
  482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3`

C++ benchmarks:
`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3`

Fortran benchmarks:
`-xAVX -ipo -O3 -no-prec-div -opt-prefetch`

Benchmarks using both Fortran and C:
`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Continued on next page

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: `-xAVX`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-opt-mem-layout-trans=3`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -auto-ilp32`

436.cactusADM: `basepeak = yes`

454.calculix: `basepeak = yes`

481.wrf: `-xAVX -ipo -O3 -no-prec-div -auto-ilp32`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html`
`http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml`
`http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Fri Jul 25 00:09:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 July 2014.