SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro SuperServer 4047R-7JRFT
X9QR7-JTF, Intel Xeon E5-4610 v2)

SPECfp®_rate2006 = 923

SPECfp_rate_base2006 = 909

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jun-2014
Hardware Availability: Mar-2014
Software Availability: Sep-2013

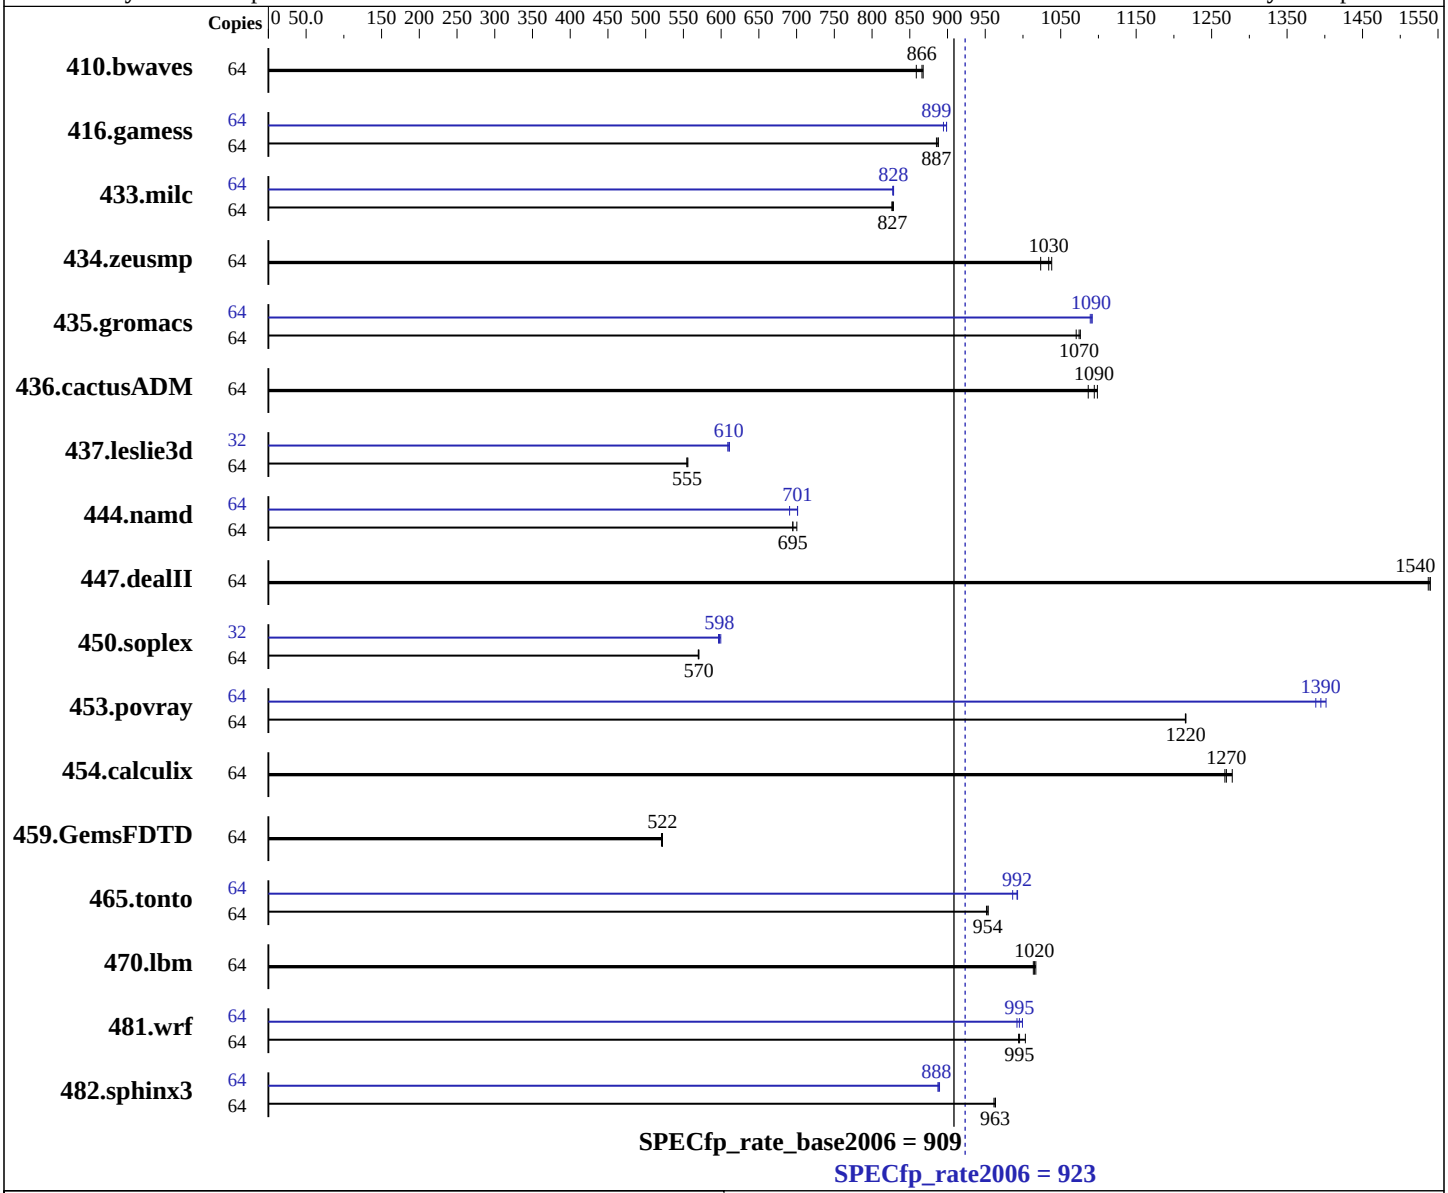

Hardware

CPU Name:	Intel Xeon E5-4610 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 2.70 GHz
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	32 cores, 4 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.4, Kernel 2.6.32-358.23.2.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro SuperServer 4047R-7JRFT
X9QR7-JTF, Intel Xeon E5-4610 v2)

SPECfp_rate2006 = 923

SPECfp_rate_base2006 = 909

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jun-2014
Hardware Availability: Mar-2014
Software Availability: Sep-2013

L3 Cache: 16 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1600 MHz)
Disk Subsystem: 1 x 750 GB SATA II, 7200 RPM
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V10.0

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	1002	868	**1004**	**866**	1013	859	64	1002	868	**1004**	**866**	1013	859
416.gamess	64	**1412**	**887**	1415	885	1411	888	64	**1394**	**899**	1394	899	1401	895
433.milc	64	711	826	709	828	**710**	**827**	64	710	827	**709**	**828**	709	829
434.zeusmp	64	561	1040	569	1020	**563**	**1030**	64	561	1040	569	1020	**563**	**1030**
435.gromacs	64	**425**	**1070**	425	1080	427	1070	64	420	1090	**419**	**1090**	419	1090
436.cactusADM	64	**699**	**1090**	696	1100	704	1090	64	**699**	**1090**	696	1100	704	1090
437.leslie3d	64	1082	556	1085	555	**1084**	**555**	32	494	609	**493**	**610**	492	611
444.namd	64	733	700	**739**	**695**	739	695	64	743	691	732	701	**732**	**701**
447.dealII	64	476	1540	476	1540	**476**	**1540**	64	476	1540	476	1540	**476**	**1540**
450.soplex	64	**936**	**570**	937	570	936	570	32	**446**	**598**	445	600	447	597
453.povray	64	280	1220	280	1220	**280**	**1220**	64	**244**	**1390**	243	1400	245	1390
454.calculix	64	413	1280	417	1270	**416**	**1270**	64	413	1280	417	1270	**416**	**1270**
459.GemsFDTD	64	1303	521	**1300**	**522**	1300	522	64	1303	521	**1300**	**522**	1300	522
465.tonto	64	**660**	**954**	662	952	660	954	64	634	993	**635**	**992**	638	986
470.lbm	64	867	1010	**866**	**1020**	865	1020	64	867	1010	**866**	**1020**	865	1020
481.wrf	64	719	994	713	1000	**718**	**995**	64	715	999	**718**	**995**	721	992
482.sphinx3	64	1297	962	**1295**	**963**	1295	964	64	**1405**	**888**	1402	889	1405	888

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Configuration:
Disable C1E Support, DRAM RAPL Mode, Demand Scrub, Double Refresh.
Set Package C-state Limit to C0
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RedHat EL 6.4
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main

Continued on next page

Base Portability Flags (Continued)

459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
-unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revD.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revD.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Fri Jul 25 00:20:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 July 2014.