



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 1018D-73MTF
(X10SL7-F, Intel Xeon E3-1281 v3)

SPECfp®2006 = **78.8**

SPECfp_base2006 = **77.5**

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2014

Hardware Availability: May-2014

Software Availability: Nov-2013

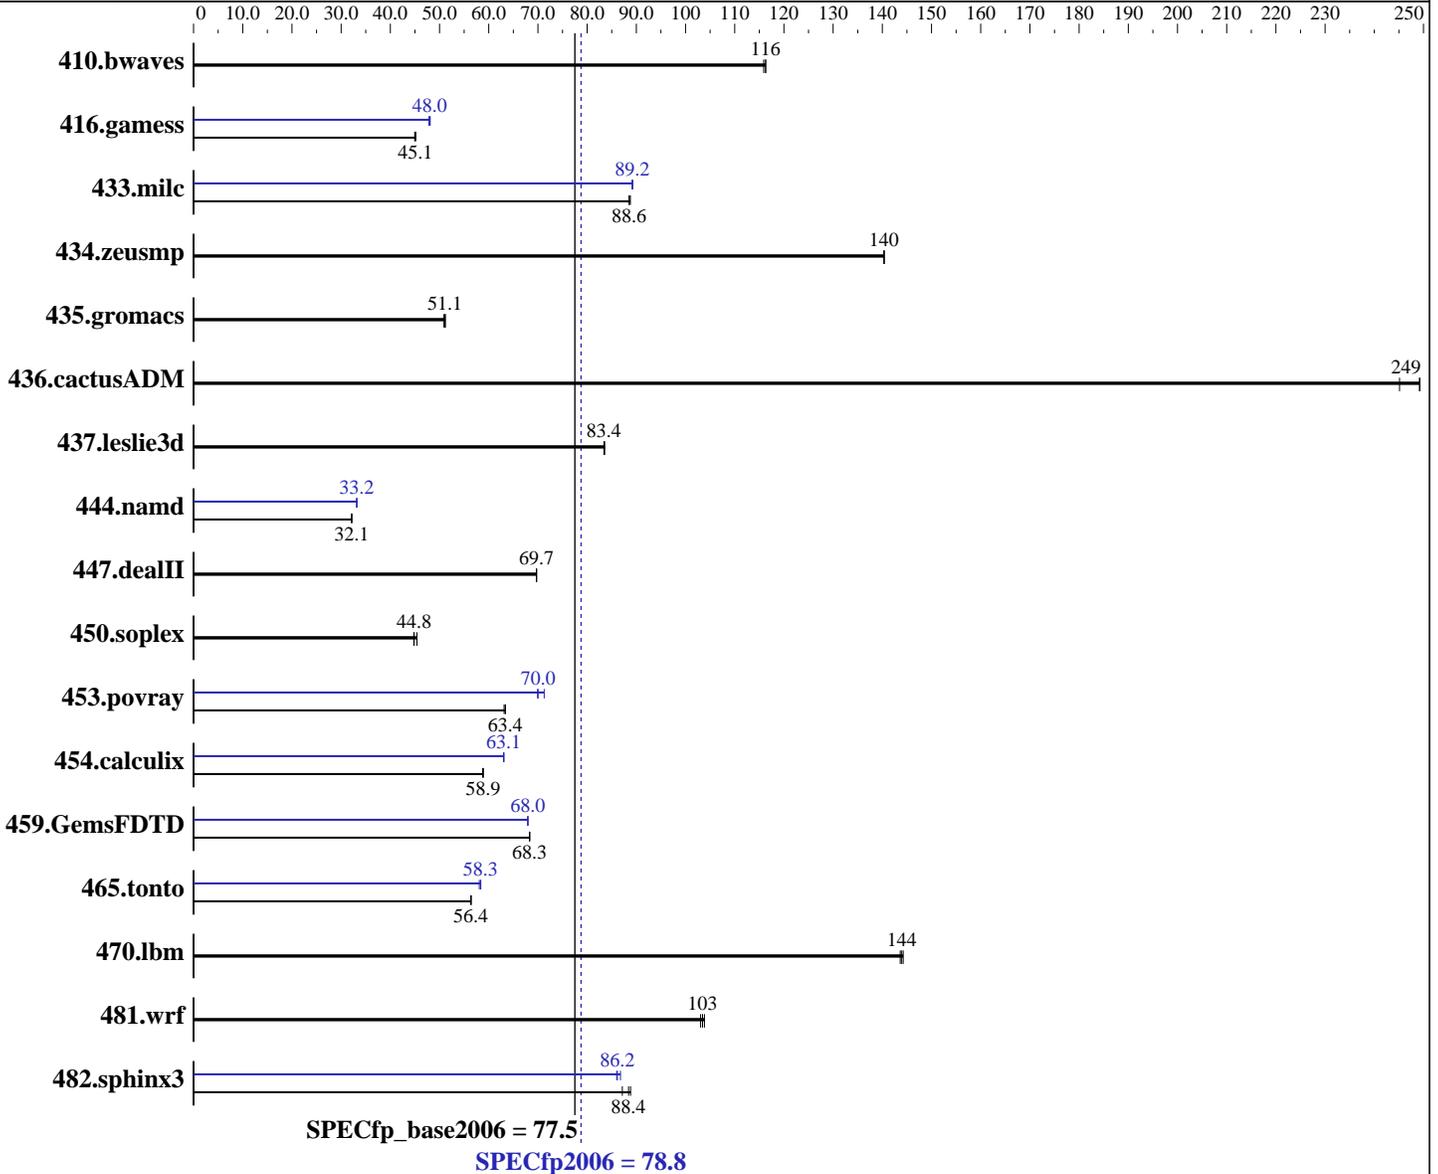

Hardware

CPU Name: Intel Xeon E3-1281 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 4.10 GHz
 CPU MHz: 3700
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5, Kernel 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 1018D-73MTF
(X10SL7-F, Intel Xeon E3-1281 v3)

SPECfp2006 = **78.8**

SPECfp_base2006 = **77.5**

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2014

Hardware Availability: May-2014

Software Availability: Nov-2013

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC)
Disk Subsystem: 1 x 200 GB SATA III, SSD
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	117	116	117	116	<u>117</u>	<u>116</u>	117	116	117	116	<u>117</u>	<u>116</u>
416.gamess	434	45.2	436	45.0	<u>434</u>	<u>45.1</u>	407	48.1	409	47.8	<u>408</u>	<u>48.0</u>
433.milc	103	88.8	104	88.5	<u>104</u>	<u>88.6</u>	103	89.3	<u>103</u>	<u>89.2</u>	103	89.2
434.zeusmp	64.8	140	64.8	140	<u>64.8</u>	<u>140</u>	64.8	140	64.8	140	<u>64.8</u>	<u>140</u>
435.gromacs	<u>140</u>	<u>51.1</u>	140	50.9	140	51.2	<u>140</u>	<u>51.1</u>	140	50.9	140	51.2
436.cactusADM	48.0	249	48.7	245	<u>48.0</u>	<u>249</u>	48.0	249	48.7	245	<u>48.0</u>	<u>249</u>
437.leslie3d	113	83.4	112	83.6	<u>113</u>	<u>83.4</u>	113	83.4	112	83.6	<u>113</u>	<u>83.4</u>
444.namd	250	32.1	<u>249</u>	<u>32.1</u>	249	32.2	242	33.2	242	33.2	<u>242</u>	<u>33.2</u>
447.dealII	164	69.7	<u>164</u>	<u>69.7</u>	164	69.7	164	69.7	<u>164</u>	<u>69.7</u>	164	69.7
450.soplex	<u>186</u>	<u>44.8</u>	186	44.8	184	45.4	<u>186</u>	<u>44.8</u>	186	44.8	184	45.4
453.povray	<u>84.0</u>	<u>63.4</u>	84.3	63.1	83.9	63.4	76.1	69.9	<u>76.0</u>	<u>70.0</u>	74.6	71.3
454.calculix	140	58.9	140	58.8	<u>140</u>	<u>58.9</u>	<u>131</u>	<u>63.1</u>	131	63.1	131	63.0
459.GemsFDTD	155	68.4	155	68.3	<u>155</u>	<u>68.3</u>	<u>156</u>	<u>68.0</u>	156	68.0	156	68.0
465.tonto	174	56.4	<u>174</u>	<u>56.4</u>	174	56.4	169	58.4	<u>169</u>	<u>58.3</u>	169	58.1
470.lbm	95.7	144	95.3	144	<u>95.5</u>	<u>144</u>	95.7	144	95.3	144	<u>95.5</u>	<u>144</u>
481.wrf	108	104	<u>108</u>	<u>103</u>	108	103	108	104	<u>108</u>	<u>103</u>	108	103
482.sphinx3	219	88.8	<u>220</u>	<u>88.4</u>	224	87.2	<u>226</u>	<u>86.2</u>	225	86.8	227	86.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP_NUM_THREADS = "4"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

runspec command invoked through numactl i.e.:

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 2



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 1018D-73MTF
(X10SL7-F, Intel Xeon E3-1281 v3)

SPECfp2006 = 78.8

SPECfp_base2006 = 77.5

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jun-2014
Hardware Availability: May-2014
Software Availability: Nov-2013

General Notes (Continued)

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 1018D-73MTF
(X10SL7-F, Intel Xeon E3-1281 v3)

SPECfp2006 = 78.8

SPECfp_base2006 = 77.5

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jun-2014
Hardware Availability: May-2014
Software Availability: Nov-2013

Base Optimization Flags (Continued)

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:
433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32 -ansi-alias
470.lbm: basepeak = yes
482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

C++ benchmarks:
444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 1018D-73MTF
(X10SL7-F, Intel Xeon E3-1281 v3)

SPECfp2006 = **78.8**

SPECfp_base2006 = **77.5**

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jun-2014
Hardware Availability: May-2014
Software Availability: Nov-2013

Peak Optimization Flags (Continued)

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revD.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 1018D-73MTF
(X10SL7-F, Intel Xeon E3-1281 v3)

SPECfp2006 = 78.8

SPECfp_base2006 = 77.5

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2014

Hardware Availability: May-2014

Software Availability: Nov-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Fri Jul 25 00:10:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 July 2014.