



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp®2006 = 67.0

Huawei CH240 (Intel Xeon E5-4620 v2)

SPECfp_base2006 = 62.6

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: May-2014

Hardware Availability: Mar-2014

Software Availability: Nov-2013

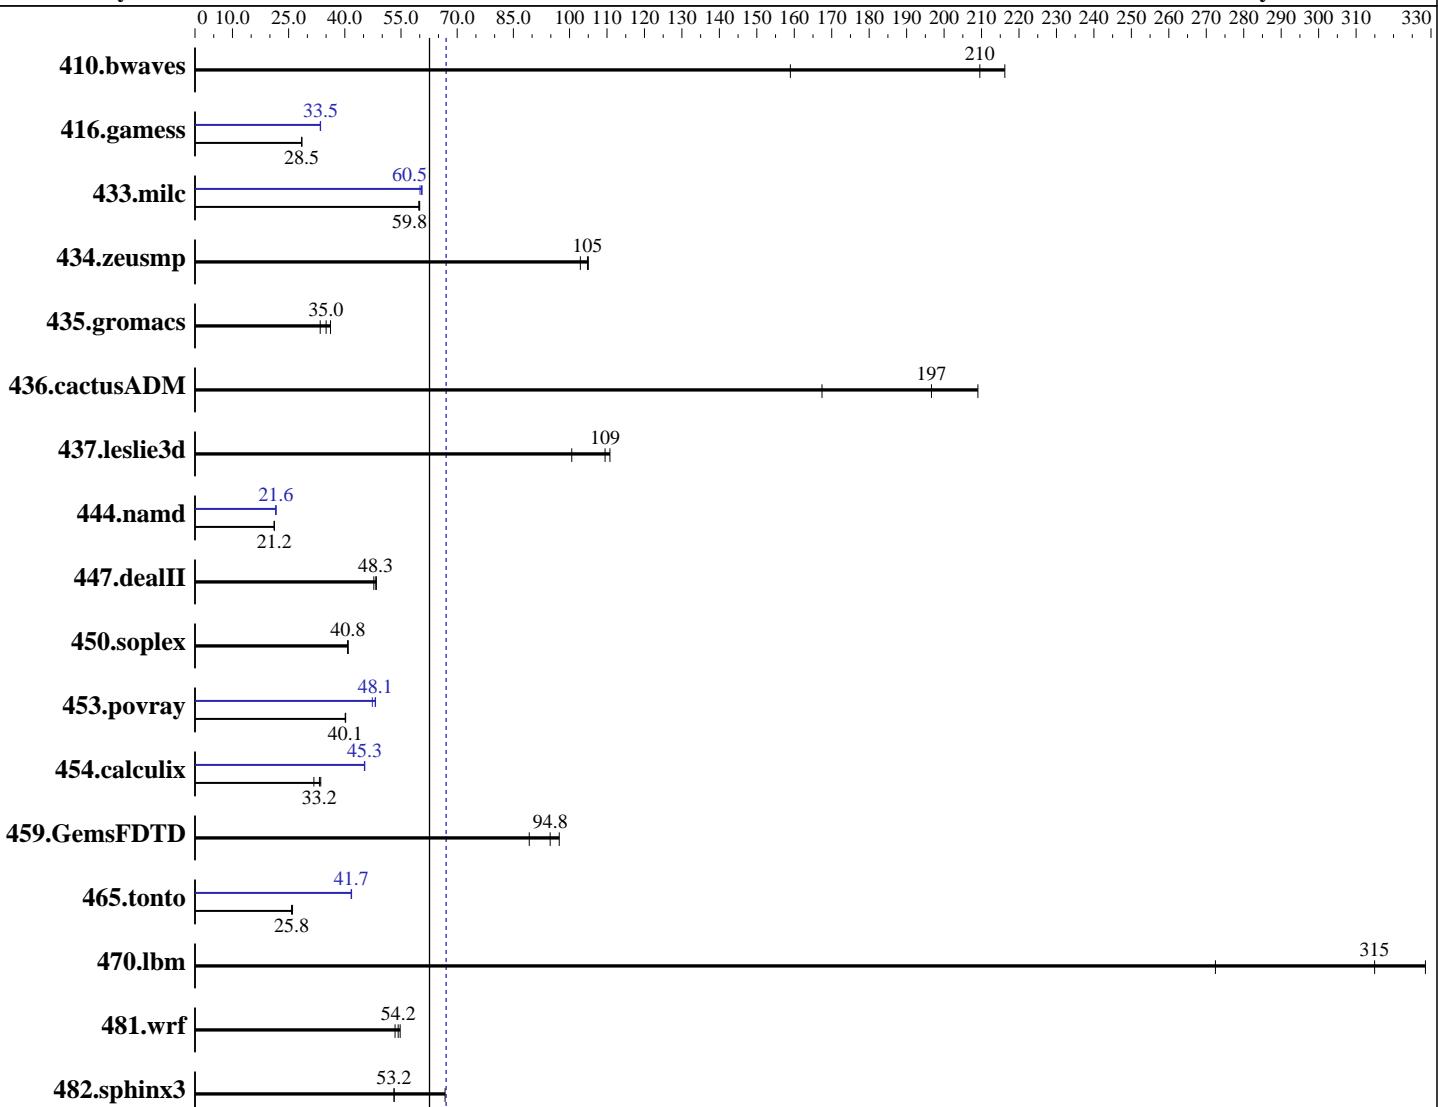

SPECfp_base2006 = 62.6

SPECfp2006 = 67.0

Hardware

CPU Name: Intel Xeon E5-4620 v2
CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz
CPU MHz: 2600
FPU: Integrated
CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip
CPU(s) orderable: 2,4 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
Compiler: 2.6.32-431.el6.x86_64
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel: Yes
File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 67.0

Huawei CH240 (Intel Xeon E5-4620 v2)

SPECfp_base2006 = 62.6

CPU2006 license: 3175

Test date: May-2014

Test sponsor: Huawei

Hardware Availability: Mar-2014

Tested by: Huawei

Software Availability: Nov-2013

L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (32 x 8 GB 2Rx8 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 300 GB SAS, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	85.5	159	64.9	210	62.9	216	85.5	159	64.9	210	62.9	216
416.gamess	687	28.5	687	28.5	688	28.5	585	33.4	584	33.5	584	33.5
433.milc	153	60.0	154	59.8	153	59.8	153	60.1	152	60.5	151	60.6
434.zeusmp	88.4	103	86.8	105	86.7	105	88.4	103	86.8	105	86.7	105
435.gromacs	214	33.4	197	36.2	204	35.0	214	33.4	197	36.2	204	35.0
436.cactusADM	57.2	209	60.8	197	71.4	167	57.2	209	60.8	197	71.4	167
437.leslie3d	84.8	111	85.9	109	93.5	101	84.8	111	85.9	109	93.5	101
444.namd	379	21.2	379	21.2	379	21.2	371	21.6	371	21.6	371	21.6
447.dealII	240	47.7	237	48.3	236	48.4	240	47.7	237	48.3	236	48.4
450.soplex	204	40.8	204	40.9	204	40.8	204	40.8	204	40.9	204	40.8
453.povray	132	40.2	133	40.1	133	40.1	110	48.2	112	47.3	111	48.1
454.calculix	248	33.2	260	31.7	246	33.6	182	45.2	182	45.3	182	45.3
459.GemsFDTD	112	94.8	119	89.2	109	97.2	112	94.8	119	89.2	109	97.2
465.tonto	381	25.8	381	25.8	378	26.0	236	41.7	235	41.8	236	41.7
470.lbm	41.8	329	43.6	315	50.4	272	41.8	329	43.6	315	50.4	272
481.wrf	206	54.2	204	54.8	209	53.4	206	54.2	204	54.8	209	53.4
482.sphinx3	367	53.2	367	53.1	292	66.8	367	53.2	367	53.1	292	66.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

```
Sysinfo program /spec/config/sysinfo.rev6818
$Rev: 6818 $ $Date::: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on localhost Tue Jun 3 17:11:26 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4620 v2 @ 2.60GHz
Continued on next page
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 67.0

Huawei CH240 (Intel Xeon E5-4620 v2)

SPECfp_base2006 = 62.6

CPU2006 license: 3175

Test date: May-2014

Test sponsor: Huawei

Hardware Availability: Mar-2014

Tested by: Huawei

Software Availability: Nov-2013

Platform Notes (Continued)

```
4 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings : 8
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
  physical 2: cores 0 1 2 3 4 5 6 7
  physical 3: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

From /proc/meminfo
MemTotal:      264479484 kB
HugePages_Total:        0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux localhost 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jun 3 10:37

SPEC is set to: /spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext4  245G   18G  215G   8%  /

Additional information from dmidecode:
BIOS Insyde Corp. OARYV388 04/23/2014
Memory:
 16x NO DIMM NO DIMM
 32x Samsung M393B1G73BH0-CK0 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)
```

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"
OMP_NUM_THREADS = "32"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 67.0

Huawei CH240 (Intel Xeon E5-4620 v2)

SPECfp_base2006 = 62.6

CPU2006 license: 3175

Test date: May-2014

Test sponsor: Huawei

Hardware Availability: Mar-2014

Tested by: Huawei

Software Availability: Nov-2013

General Notes (Continued)

memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
  437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
  447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
  470.lbm: -DSPEC_CPU_LP64
  481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 67.0

Huawei CH240 (Intel Xeon E5-4620 v2)

SPECfp_base2006 = 62.6

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2014

Hardware Availability: Mar-2014

Software Availability: Nov-2013

Base Optimization Flags (Continued)

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
-ansi-alias
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: basepeak = yes
```

C++ benchmarks:

```
444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 67.0

Huawei CH240 (Intel Xeon E5-4620 v2)

SPECfp_base2006 = 62.6

CPU2006 license: 3175

Test date: May-2014

Test sponsor: Huawei

Hardware Availability: Mar-2014

Tested by: Huawei

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 67.0

Huawei CH240 (Intel Xeon E5-4620 v2)

SPECfp_base2006 = 62.6

CPU2006 license: 3175

Test date: May-2014

Test sponsor: Huawei

Hardware Availability: Mar-2014

Tested by: Huawei

Software Availability: Nov-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Fri Jul 25 01:03:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 15 July 2014.