SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Quanta Computer Inc.

Quanta Q71L-4U(Intel Xeon E7-4890 v2)

SPECint®_rate2006 = 2390

SPECint_rate_base2006 = 2320

CPU2006 license: 9050
Test sponsor: Quanta Computer Inc.
Tested by: Quanta Computer Inc.

Test date: Jun-2014
Hardware Availability: Jun-2014
Software Availability: Nov-2013

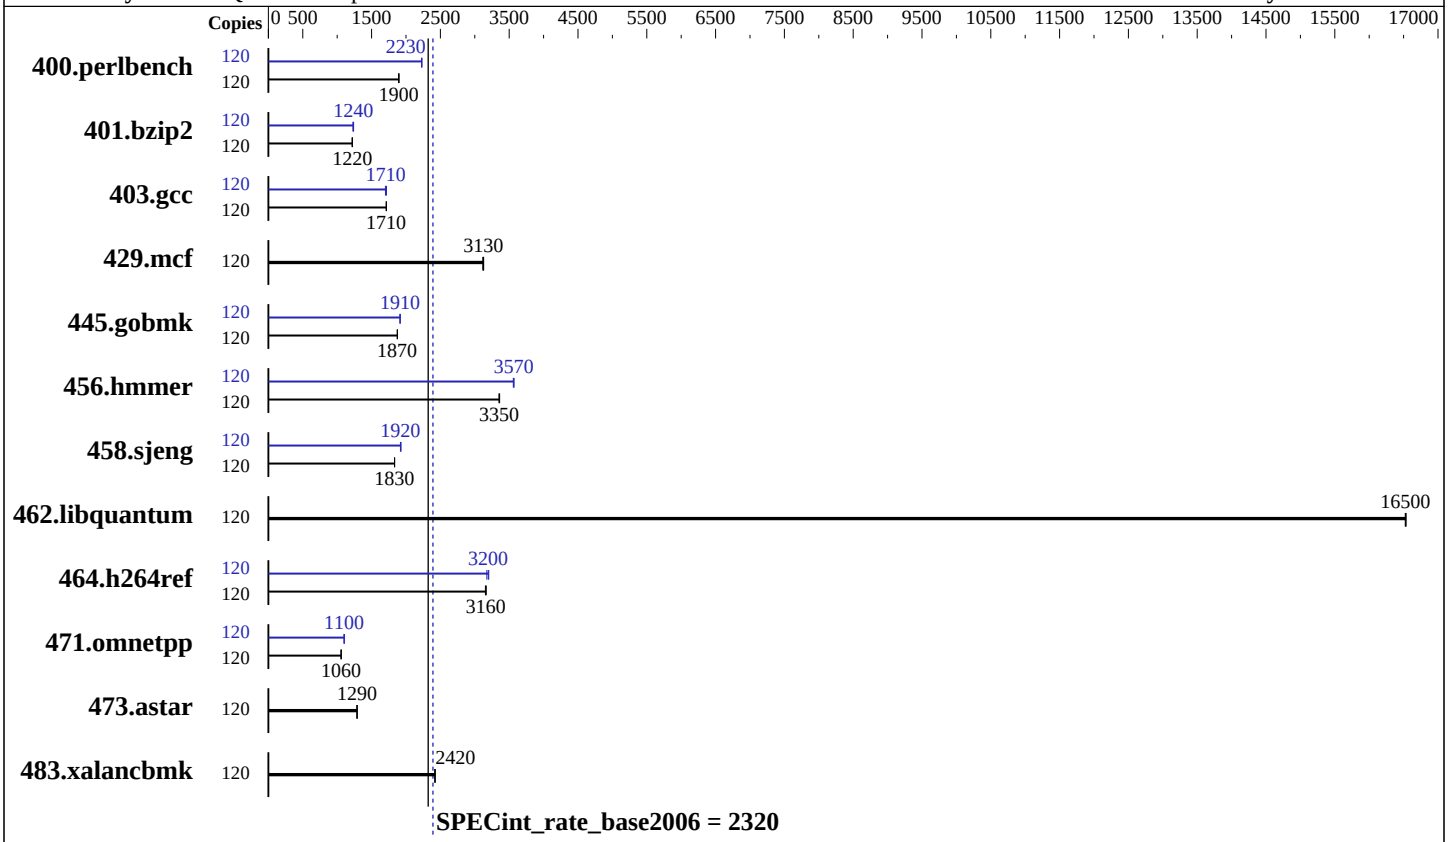

Hardware

CPU Name:	Intel Xeon E7-4890 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.40 GHz
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	60 cores, 4 chips, 15 cores/chip, 2 threads/core
CPU(s) orderable:	1,2,3,4 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	37.5 MB I+D on chip per chip
Other Cache:	None
Memory:	512 GB (64 x 8 GB 2Rx4 PC3-10600R-13, ECC)
Disk Subsystem:	394 GB add more disk info here
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (Multi-user mode)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Quanta Computer Inc.

Quanta Q71L-4U(Intel Xeon E7-4890 v2)

SPECint_rate2006 = 2390

SPECint_rate_base2006 = 2320

CPU2006 license: 9050
Test sponsor: Quanta Computer Inc.
Tested by: Quanta Computer Inc.

Test date: Jun-2014
Hardware Availability: Jun-2014
Software Availability: Nov-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	120	619	1890	618	1900	**619**	**1900**	120	526	2230	**526**	**2230**	526	2230
401.bzip2	120	948	1220	**949**	**1220**	951	1220	120	935	1240	**937**	**1240**	942	1230
403.gcc	120	564	1710	563	1710	**563**	**1710**	120	563	1720	**565**	**1710**	568	1700
429.mcf	120	**350**	**3130**	350	3130	351	3120	120	**350**	**3130**	350	3130	351	3120
445.gobmk	120	**672**	**1870**	671	1880	672	1870	120	658	1910	657	1910	**657**	**1910**
456.hmmer	120	**334**	**3350**	333	3360	334	3350	120	314	3570	315	3560	**314**	**3570**
458.sjeng	120	792	1830	**792**	**1830**	792	1830	120	**756**	**1920**	756	1920	753	1930
462.libquantum	120	150	16500	150	16500	**150**	**16500**	120	150	16500	150	16500	**150**	**16500**
464.h264ref	120	**840**	**3160**	839	3170	842	3150	120	**831**	**3200**	829	3200	836	3170
471.omnetpp	120	**709**	**1060**	709	1060	709	1060	120	681	1100	680	1100	**681**	**1100**
473.astar	120	654	1290	653	1290	**654**	**1290**	120	654	1290	653	1290	**654**	**1290**
483.xalancbmk	120	342	2420	342	2420	**342**	**2420**	120	342	2420	342	2420	**342**	**2420**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Sysinfo program /root/speccpu_linux/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Fri Jun 20 19:43:36 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E7-4890 v2 @ 2.80GHz
      4 "physical id"s (chips)
      120 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 15
      siblings  : 30
```

Continued on next page

Platform Notes (Continued)

```
        physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
        physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
        physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
        physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
     cache size : 38400 KB

  From /proc/meminfo
     MemTotal:       529144892 kB
     HugePages_Total:       1
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     Red Hat Enterprise Linux Server release 6.5 (Santiago)

  From /etc/*release* /etc/*version*
     redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
     system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

  uname -a:
     Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54
     EST 2013 x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Jun 20 19:31

  SPEC is set to: /root/speccpu_linux
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda2      ext4  394G   11G  363G   3% /

  Additional information from dmidecode:
    BIOS American Megatrends Inc. S4L_3A06 04/18/2014
    Memory:
     32x NO DIMM NO DIMM
     64x Samsung M393B1K70CH0-CH9 8 GB 1333 MHz 2 rank

  (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/root/speccpu_linux/libs/32:/root/speccpu_linux/libs/64:/root/speccpu_linux/sh"

  Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
  memory using RedHat EL 6.4
  Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
  Filesystem page cache cleared with:
  echo 1>       /proc/sys/vm/drop_caches
  runspec command invoked through numactl i.e.:
  numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc  -m32
```

C++ benchmarks:
```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc  -m32
```

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
```
icpc -m32
```

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html`
`http://www.spec.org/cpu2006/flags/Quanta-Computer-Inc-Platform-Settings-V1.0.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml`
`http://www.spec.org/cpu2006/flags/Quanta-Computer-Inc-Platform-Settings-V1.0.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Fri Aug 15 17:46:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 August 2014.