SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO motherboard (AMD A10-6700 APU with Radeon HD Graphics)

SPECint®2006 = 32.0

SPECint_base2006 = 29.7

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jan-2014
Hardware Availability: Aug-2013
Software Availability: Apr-2013

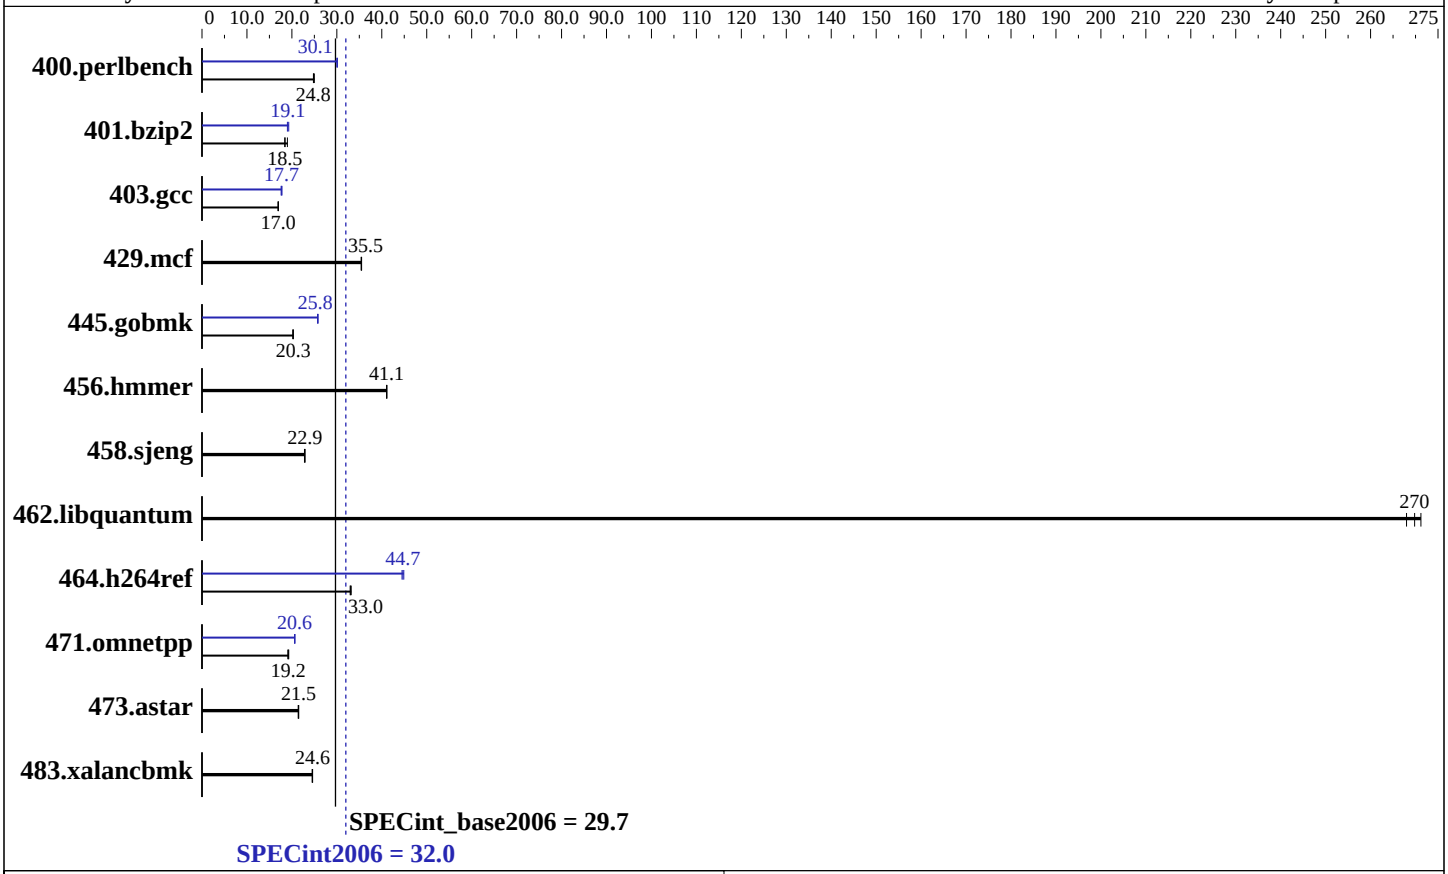

Hardware

CPU Name:	AMD A10-6700
CPU Characteristics:	AMD Turbo CORE technology up to 4.30 GHz
CPU MHz:	3700
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	128 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	4 GB (2 x 2 GB 1Rx8 PC3-12800U-11)
Disk Subsystem:	250 GB Seagate SATA HDD, 7200 RPM
Other Hardware:	None

Software

Operating System:	Microsoft Windows 7 Enterprise 6.1.7601 Service Pack 1 Build 7601
Compiler:	C/C++: Version 13.1.1.171 of Intel C++ Studio XE for Windows; Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
Auto Parallel:	Yes
File System:	NTFS
System State:	Default
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap Library Version 10.0 from http://www.microquill.com/

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO motherboard (AMD A10-6700 APU with Radeon HD Graphics)

SPECint2006 = 32.0

SPECint_base2006 = 29.7

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jan-2014
Hardware Availability: Aug-2013
Software Availability: Apr-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	**394**	**24.8**	390	25.0	394	24.8	326	30.0	**325**	**30.1**	325	30.1
401.bzip2	507	19.0	**523**	**18.5**	526	18.4	500	19.3	**504**	**19.1**	508	19.0
403.gcc	476	16.9	**475**	**17.0**	474	17.0	453	17.8	457	17.6	**455**	**17.7**
429.mcf	257	35.4	257	35.5	**257**	**35.5**	257	35.4	257	35.5	**257**	**35.5**
445.gobmk	518	20.2	517	20.3	**517**	**20.3**	407	25.8	409	25.7	**407**	**25.8**
456.hmmer	**227**	**41.1**	227	41.1	227	41.1	**227**	**41.1**	227	41.1	227	41.1
458.sjeng	528	22.9	530	22.8	**529**	**22.9**	528	22.9	530	22.8	**529**	**22.9**
462.libquantum	**76.8**	**270**	76.4	271	77.3	268	**76.8**	**270**	76.4	271	77.3	268
464.h264ref	670	33.0	667	33.2	**670**	**33.0**	**495**	**44.7**	493	44.9	497	44.5
471.omnetpp	324	19.3	**325**	**19.2**	326	19.1	303	20.7	**303**	**20.6**	304	20.6
473.astar	326	21.5	**327**	**21.5**	327	21.4	326	21.5	**327**	**21.5**	327	21.4
483.xalancbmk	280	24.6	282	24.5	**281**	**24.6**	280	24.6	282	24.5	**281**	**24.6**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
To compile these binaries, the Intel Compiler 13.1 was set up to
generate 64-bit binaries with the command:
"ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r)
Parallel Studio XE 2013 program folder)
```

Platform Notes

```
Sysinfo program C:\SPEC13.1/Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #$ \8787f7622badcf24e01c368b1db4377c
running on F2A85MPRO Sat Jan 18 10:35:43 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

Trying 'systeminfo'
OS Name        : Microsoft Windows 7 Enterprise
OS Version     : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: System manufacturer
System Model   : System Product Name
Processor(s)   : 1 Processor(s) Installed.
     [01]: AMD64 Family 21 Model 19 Stepping 1 AuthenticAMD ~3700 Mhz
BIOS Version   : American Megatrends Inc. 6303, 8/13/2013
Total Physical Memory: 3,271 MB

Trying 'wmic cpu get /value'
DeviceID       : CPU0
```

Continued on next page

Platform Notes (Continued)

```
L2CacheSize   : 4096
L3CacheSize   : 0
MaxClockSpeed : 3700
Name          : AMD A10-6700 APU with Radeon(tm) HD Graphics
NumberOfCores : 2
NumberOfLogicalProcessors: 4

(End of data from sysinfo program)
```

Component Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
Micron MT8JTF25664AZ-1G6 Series Memory DIMMs
```

General Notes

```
OMP_NUM_THREADS set to number of processors cores
KMP_AFFINITY set to granularity=fine,scatter
Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit
```

Base Compiler Invocation

C benchmarks:
```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:
```
icl -Qvc10
```

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64_X64
               -DSPEC_CPU_NO_NEED_VA_COPY
  401.bzip2: -DSPEC_CPU_P64
    403.gcc: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64
    429.mcf: -DSPEC_CPU_P64
  445.gobmk: -DSPEC_CPU_P64
  456.hmmer: -DSPEC_CPU_P64
  458.sjeng: -DSPEC_CPU_P64
462.libquantum: -DSPEC_CPU_P64
  464.h264ref: -DSPEC_CPU_P64 -DWIN32 -DSPEC_CPU_NO_INTTYPES
  471.omnetpp: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64
    473.astar: -DSPEC_CPU_P64
483.xalancbmk: -DSPEC_CPU_P64 -Qoption,cpp,--no_wchar_t_keyword
```

Base Optimization Flags

C benchmarks:
```
/arch:AVX -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel
-Qauto-ilp32 /F512000000
```

C++ benchmarks:
```
/arch:AVX -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
-Qauto-ilp32 /F512000000 shlW64M.lib            -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks:
```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:
```
icl -Qvc10
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

400.perlbench: `/arch:AVX`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2)
`-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch`
`-Qauto-ilp32 /F512000000 shlW64M.lib`
`-link /FORCE:MULTIPLE`

401.bzip2: `/arch:AVX`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2)
`-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias`
`-Qauto-ilp32 /F512000000`

403.gcc: `/arch:AVX`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2)
`-Qipo -O3 -Qprec-div- -Qauto-ilp32 /F512000000`

Continued on next page

Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O2 -Qprec-div- -Qansi-alias -Qauto-ilp32 /F512000000

456.hmmer: basepeak = yes

458.sjeng: basepeak = yes

462.libquantum: basepeak = yes

464.h264ref: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias -Qauto-ilp32 /F512000000

C++ benchmarks:

471.omnetpp: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-ra-region-strategy=block -Qauto-ilp32 /F512000000 shlW64M.lib -link /FORCE:MULTIPLE

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.20130924.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.20130924.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Aug 12 15:06:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 July 2014.