SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO motherboard (AMD A10-7700K APU with Radeon R7 Graphics)

SPECint®2006 = 29.8

SPECint_base2006 = 28.3

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jun-2014
Hardware Availability: Jan-2014
Software Availability: Apr-2013

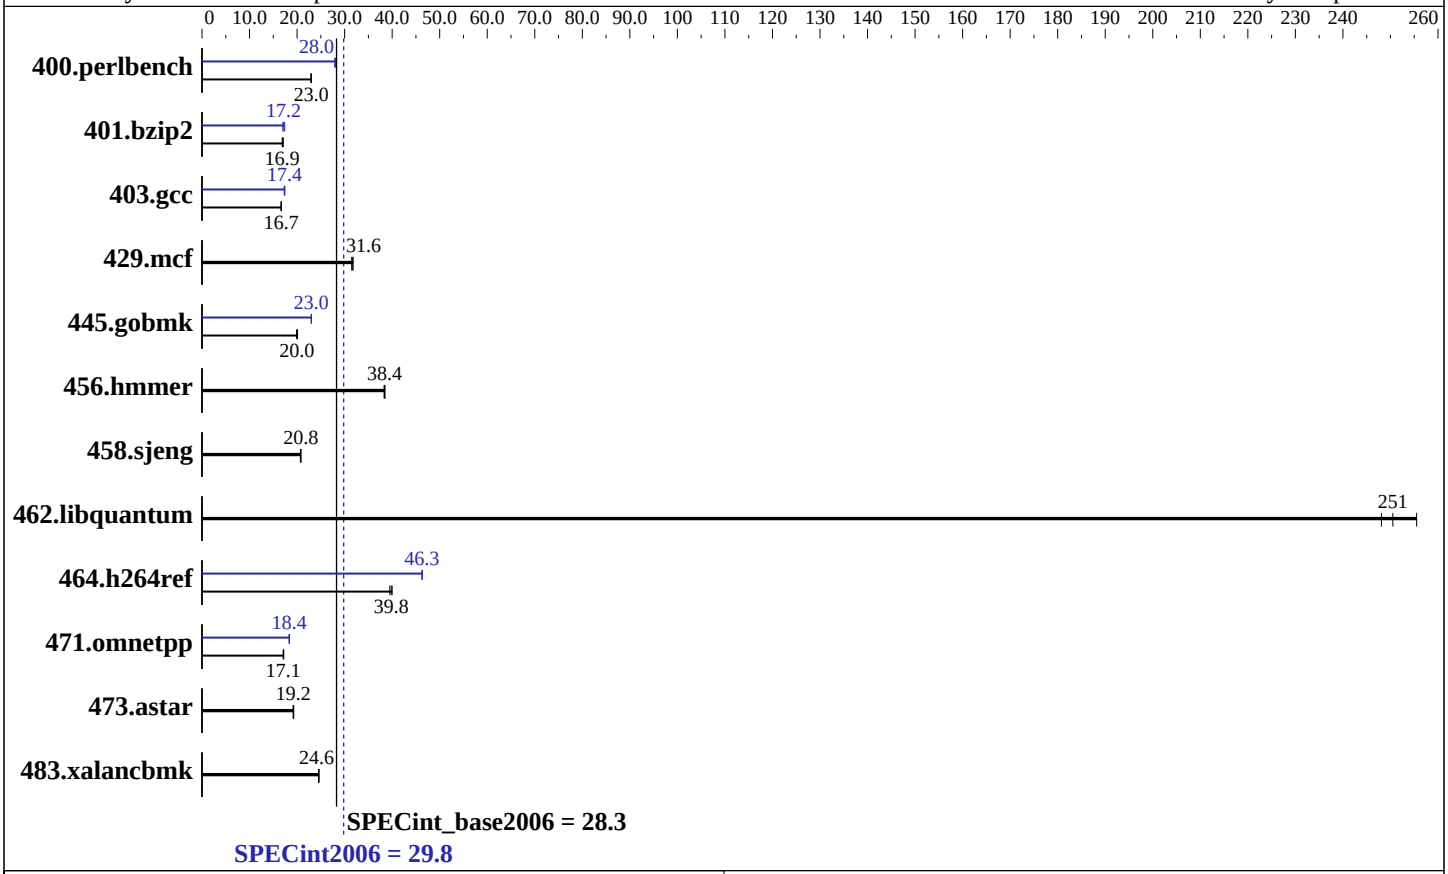

Hardware

CPU Name:	AMD A10-7700K
CPU Characteristics:	AMD Turbo CORE technology up to 3.80 GHz
CPU MHz:	3400
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	192 KB I on chip per chip, 96 KB I shared / 2 cores; 16 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	4 GB (2 x 2 GB 1Rx8 PC3-12800U-11)
Disk Subsystem:	250 GB Seagate SATA HDD, 7200 RPM
Other Hardware:	None

Software

Operating System:	Microsoft Windows 7 Enterprise 6.1.7601 Service Pack 1 Build 7601
Compiler:	C/C++: Version 13.1.1.171 of Intel C++ Studio XE for Windows; Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
Auto Parallel:	Yes
File System:	NTFS
System State:	Default
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap Library Version 10.0 from http://www.microquill.com/

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

ASUS A88X-PRO motherboard (AMD A10-7700K APU with Radeon R7 Graphics)

SPECint2006 = 29.8

SPECint_base2006 = 28.3

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jun-2014
Hardware Availability: Jan-2014
Software Availability: Apr-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	426	22.9	**425**	**23.0**	424	23.0	349	28.0	350	28.0	**349**	**28.0**
401.bzip2	564	17.1	**571**	**16.9**	572	16.9	569	17.0	**561**	**17.2**	555	17.4
403.gcc	481	16.7	484	16.6	**483**	**16.7**	464	17.3	462	17.4	**463**	**17.4**
429.mcf	287	31.8	289	31.5	**289**	**31.6**	287	31.8	289	31.5	**289**	**31.6**
445.gobmk	522	20.1	**525**	**20.0**	527	19.9	456	23.0	**456**	**23.0**	457	23.0
456.hmmer	244	38.3	**243**	**38.4**	243	38.5	244	38.3	**243**	**38.4**	243	38.5
458.sjeng	**583**	**20.8**	583	20.8	584	20.7	**583**	**20.8**	583	20.8	584	20.7
462.libquantum	**82.7**	**251**	83.5	248	81.1	256	**82.7**	**251**	83.5	248	81.1	256
464.h264ref	560	39.5	**555**	**39.8**	553	40.0	478	46.3	**478**	**46.3**	478	46.3
471.omnetpp	**365**	**17.1**	364	17.2	365	17.1	**340**	**18.4**	340	18.4	341	18.3
473.astar	**365**	**19.2**	366	19.2	364	19.3	**365**	**19.2**	366	19.2	364	19.3
483.xalancbmk	281	24.6	281	24.5	**281**	**24.6**	281	24.6	281	24.5	**281**	**24.6**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
To compile these binaries, the Intel Compiler 13.1 was set up to
generate 64-bit binaries with the command:
"ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r)
Parallel Studio XE 2013 program folder)
```

Platform Notes

```
Sysinfo program C:\SPEC13.1/Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #$ \8787f7622badcf24e01c368b1db4377c
running on CltE03F49ADB169 Sat Jun 28 04:22:53 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

Trying 'systeminfo'
OS Name        : Microsoft Windows 7 Enterprise
OS Version     : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: System manufacturer
System Model   : System Product Name
Processor(s)   : 1 Processor(s) Installed.
     [01]: AMD64 Family 21 Model 48 Stepping 1 AuthenticAMD ~3400 Mhz
BIOS Version   : American Megatrends Inc. 0703, 12/30/2013
Total Physical Memory: 3,522 MB

Trying 'wmic cpu get /value'
DeviceID       : CPU0
```

Continued on next page

Platform Notes (Continued)

```
L2CacheSize   : 4096
L3CacheSize   : 0
MaxClockSpeed : 3400
Name          : AMD A10-7700K APU with Radeon(TM) R7 Graphics
NumberOfCores : 4
NumberOfLogicalProcessors: 4

(End of data from sysinfo program)
```

Component Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
Micron MT8JTF25664AZ-1G6 Series Memory DIMMs
```

General Notes

```
OMP_NUM_THREADS set to number of processors cores
KMP_AFFINITY set to granularity=fine,scatter
Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit
```

Base Compiler Invocation

C benchmarks:
```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:
```
icl -Qvc10
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64_X64 -DSPEC_CPU_NO_NEED_VA_COPY
401.bzip2: -DSPEC_CPU_P64
403.gcc: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64
429.mcf: -DSPEC_CPU_P64
445.gobmk: -DSPEC_CPU_P64
456.hmmer: -DSPEC_CPU_P64
458.sjeng: -DSPEC_CPU_P64
462.libquantum: -DSPEC_CPU_P64
464.h264ref: -DSPEC_CPU_P64 -DWIN32 -DSPEC_CPU_NO_INTTYPES
471.omnetpp: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64
473.astar: -DSPEC_CPU_P64
483.xalancbmk: -DSPEC_CPU_P64 -Qoption,cpp,--no_wchar_t_keyword

Base Optimization Flags

C benchmarks:
```
/arch:AVX -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel
-Qauto-ilp32 /F512000000
```

C++ benchmarks:
```
/arch:AVX -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
-Qauto-ilp32 /F512000000 shlW64M.lib            -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks:
```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:
```
icl -Qvc10
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

400.perlbench: `/arch:AVX`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2)
`-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch`
`-Qauto-ilp32 /F512000000 shlW64M.lib`
`-link /FORCE:MULTIPLE`

401.bzip2: `/arch:AVX`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2)
`-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias`
`-Qauto-ilp32 /F512000000`

403.gcc: `/arch:AVX`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2)
`-Qipo -O3 -Qprec-div- -Qauto-ilp32 /F512000000`

Continued on next page

Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O2 -Qprec-div- -Qansi-alias -Qauto-ilp32 /F512000000

456.hmmer: basepeak = yes

458.sjeng: basepeak = yes

462.libquantum: basepeak = yes

464.h264ref: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias -Qauto-ilp32 /F512000000

C++ benchmarks:

471.omnetpp: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-ra-region-strategy=block -Qauto-ilp32 /F512000000 shlW64M.lib -link /FORCE:MULTIPLE

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.20130924.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.20130924.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Aug 12 15:06:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 July 2014.