# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO motherboard (AMD A10-7700K APU with Radeon R7 Graphics)

SPECint®_rate2006 = 82.5

SPECint_rate_base2006 = 81.0

**CPU2006 license:** 13
**Test sponsor:** Intel Corporation
**Tested by:** Intel Corporation

**Test date:** Jun-2014
**Hardware Availability:** Jan-2014
**Software Availability:** Oct-2013

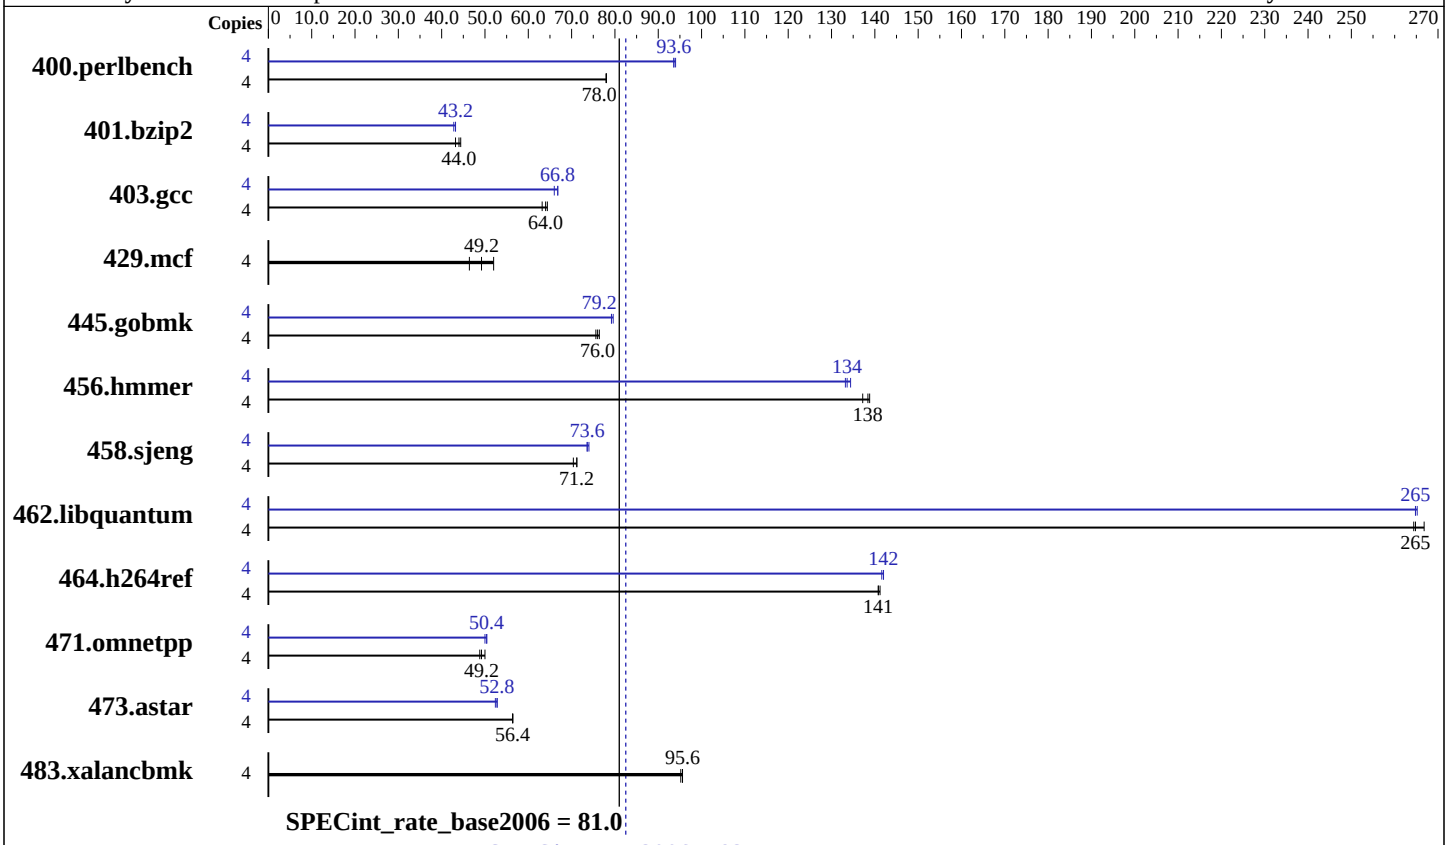


## Hardware

| | |
|---|---|
| CPU Name: | AMD A10-7700K |
| CPU Characteristics: | AMD Turbo CORE technology up to 3.80 GHz |
| CPU MHz: | 3400 |
| FPU: | Integrated |
| CPU(s) enabled: | 4 cores, 1 chip, 4 cores/chip |
| CPU(s) orderable: | 1 chip |
| Primary Cache: | 192 KB I on chip per chip, 96 KB I shared / 2 cores; 16 KB D on chip per core |
| Secondary Cache: | 4 MB I+D on chip per chip, 2 MB shared / 2 cores |
| L3 Cache: | None |
| Other Cache: | None |
| Memory: | 4 GB (2 x 2 GB 1Rx8 PC3-12800U-11) |
| Disk Subsystem: | 250 GB Seagate SATA HDD, 7200 RPM |
| Other Hardware: | None |

## Software

| | |
|---|---|
| Operating System: | Microsoft Windows 7 Enterprise 6.1.7601 Service Pack 1 Build 7601 |
| Compiler: | C/C++: Version 14.0.1.139 of Intel C++ Studio XE for Windows; Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1 |
| Auto Parallel: | No |
| File System: | NTFS |
| System State: | Default |
| Base Pointers: | 32-bit |
| Peak Pointers: | 32/64-bit |
| Other Software: | SmartHeap Library Version 10.0 from http://www.microquill.com/ |

# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO motherboard (AMD A10-7700K APU with Radeon R7 Graphics)

SPECint_rate2006 = 82.5

SPECint_rate_base2006 = 81.0

**CPU2006 license:** 13
**Test sponsor:** Intel Corporation
**Tested by:** Intel Corporation

**Test date:** Jun-2014
**Hardware Availability:** Jan-2014
**Software Availability:** Oct-2013

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 4 | 502 | 78.0 | **502** | **78.0** | 502 | 78.0 | 4 | 416 | 94.0 | 418 | 93.6 | **418** | **93.6** |
| 401.bzip2 | 4 | 872 | 44.4 | **880** | **44.0** | 892 | 43.2 | 4 | 891 | 43.2 | 899 | 42.8 | **894** | **43.2** |
| 403.gcc | 4 | **504** | **64.0** | 510 | 63.2 | 500 | 64.4 | 4 | **483** | **66.8** | 488 | 66.0 | 483 | 66.8 |
| 429.mcf | 4 | **743** | **49.2** | 784 | 46.4 | 703 | 52.0 | 4 | **743** | **49.2** | 784 | 46.4 | 703 | 52.0 |
| 445.gobmk | 4 | 548 | 76.4 | 556 | 75.6 | **553** | **76.0** | 4 | 530 | 79.2 | 528 | 79.6 | **529** | **79.2** |
| 456.hmmer | 4 | 269 | 139 | **269** | **138** | 272 | 137 | 4 | **279** | **134** | 280 | 133 | 278 | 134 |
| 458.sjeng | 4 | 682 | 71.2 | 687 | 70.4 | **682** | **71.2** | 4 | 657 | 73.6 | 653 | 74.0 | **656** | **73.6** |
| 462.libquantum | 4 | 311 | 267 | **313** | **265** | 314 | 264 | 4 | 313 | 265 | 312 | 265 | **313** | **265** |
| 464.h264ref | 4 | 628 | 141 | **628** | **141** | 629 | 141 | 4 | 623 | 142 | **624** | **142** | 625 | 142 |
| 471.omnetpp | 4 | 501 | 50.0 | **509** | **49.2** | 512 | 48.8 | 4 | 500 | 50.0 | 496 | 50.4 | **498** | **50.4** |
| 473.astar | 4 | 497 | 56.4 | **498** | **56.4** | 499 | 56.4 | 4 | 534 | 52.4 | 531 | 52.8 | **533** | **52.8** |
| 483.xalancbmk | 4 | 290 | 95.2 | 288 | 95.6 | **288** | **95.6** | 4 | 290 | 95.2 | 288 | 95.6 | **288** | **95.6** |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

```
To compile these binaries, the Intel Compiler 14.0 was set up to
generate 32-bit binaries with the command:
"ipsxe-comp-vars.bat ia32 vs2010" (shortcut provided in the Intel(r)
Parallel Studio XE 2013 program folder)
```

## Submit Notes

```
Processes were bound to specific processors using the start command with the /affinity switch.
The config file option 'submit' was used to generate the affinity mask for each process.
```

## Platform Notes

```
Sysinfo program C:\SPEC14.0/Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #$ \8787f7622badcf24e01c368b1db4377c
running on A88XPRO-PC Sat Jun 28 22:05:29 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

Trying 'systeminfo'
OS Name       : Microsoft Windows 7 Enterprise
OS Version    : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: System manufacturer
System Model  : System Product Name
Processor(s)  : 1 Processor(s) Installed.
```

Continued on next page

## Platform Notes (Continued)

```
     [01]: AMD64 Family 21 Model 48 Stepping 1 AuthenticAMD ~3400 Mhz
BIOS Version  : American Megatrends Inc. 0703, 12/30/2013
Total Physical Memory: 3,522 MB

Trying 'wmic cpu get /value'
DeviceID      : CPU0
L2CacheSize   : 4096
L3CacheSize   : 0
MaxClockSpeed : 3400
Name          : AMD A10-7700K APU with Radeon(TM) R7 Graphics
NumberOfCores : 4
NumberOfLogicalProcessors: 4

(End of data from sysinfo program)
```

## Component Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
Micron MT8JTF25664AZ-1G6 Series Memory DIMMs
```

## General Notes

```
Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit
```

## Base Compiler Invocation

C benchmarks:
```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:
```
icl -Qvc10
```

## Base Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DWIN32 -DSPEC_CPU_NO_INTTYPES`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

## Base Optimization Flags

C benchmarks:
```
/arch:AVX -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000
```

Continued on next page

## Base Optimization Flags (Continued)

C++ benchmarks:
```
/arch:AVX -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F512000000 shlW32M.lib            -link /FORCE:MULTIPLE
```

## Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):
```
icl -Qvc10 -Qstd=c99
```

456.hmmer: `C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe`

458.sjeng: `C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe`

462.libquantum: `C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe -Qstd=c99`

C++ benchmarks (except as noted below):
```
icl -Qvc10
```

473.astar: `C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe`

## Peak Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
456.hmmer: `-DSPEC_CPU_P64`
458.sjeng: `-DSPEC_CPU_P64`
462.libquantum: `-DSPEC_CPU_P64`
464.h264ref: `-DWIN32 -DSPEC_CPU_NO_INTTYPES`
473.astar: `-DSPEC_CPU_P64`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

## Peak Optimization Flags

C benchmarks:

Continued on next page

## Peak Optimization Flags (Continued)

400.perlbench: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch /F512000000 shlW32M.lib -link /FORCE:MULTIPLE

401.bzip2: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias /F512000000

403.gcc: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

429.mcf: basepeak = yes

445.gobmk: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -Qauto-ilp32 /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

458.sjeng: -Qauto-ilp32 /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 /F512000000

462.libquantum: -Qauto-ilp32 /arch:AVX -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

464.h264ref: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-ra-region-strategy=block /F512000000 shlW32M.lib -link /FORCE:MULTIPLE

473.astar: -Qauto-ilp32 /arch:AVX -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000 shlW64M.lib -link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

Continued on next page

## Peak Other Flags (Continued)

403.gcc: `-Dalloca=_alloca`

456.hmmer: `-link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD6`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64`

458.sjeng: `-link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD6`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64`

462.libquantum: `-link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD6`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64`

C++ benchmarks:

473.astar: `-link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD6`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.xml`


SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Aug 12 15:06:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 July 2014.