



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp®2006 = 62.8

Intel DQ87PG motherboard (Intel Core i5-4570)

SPECfp_base2006 = 61.4

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Oct-2013

Hardware Availability: Jul-2013

Software Availability: Apr-2013

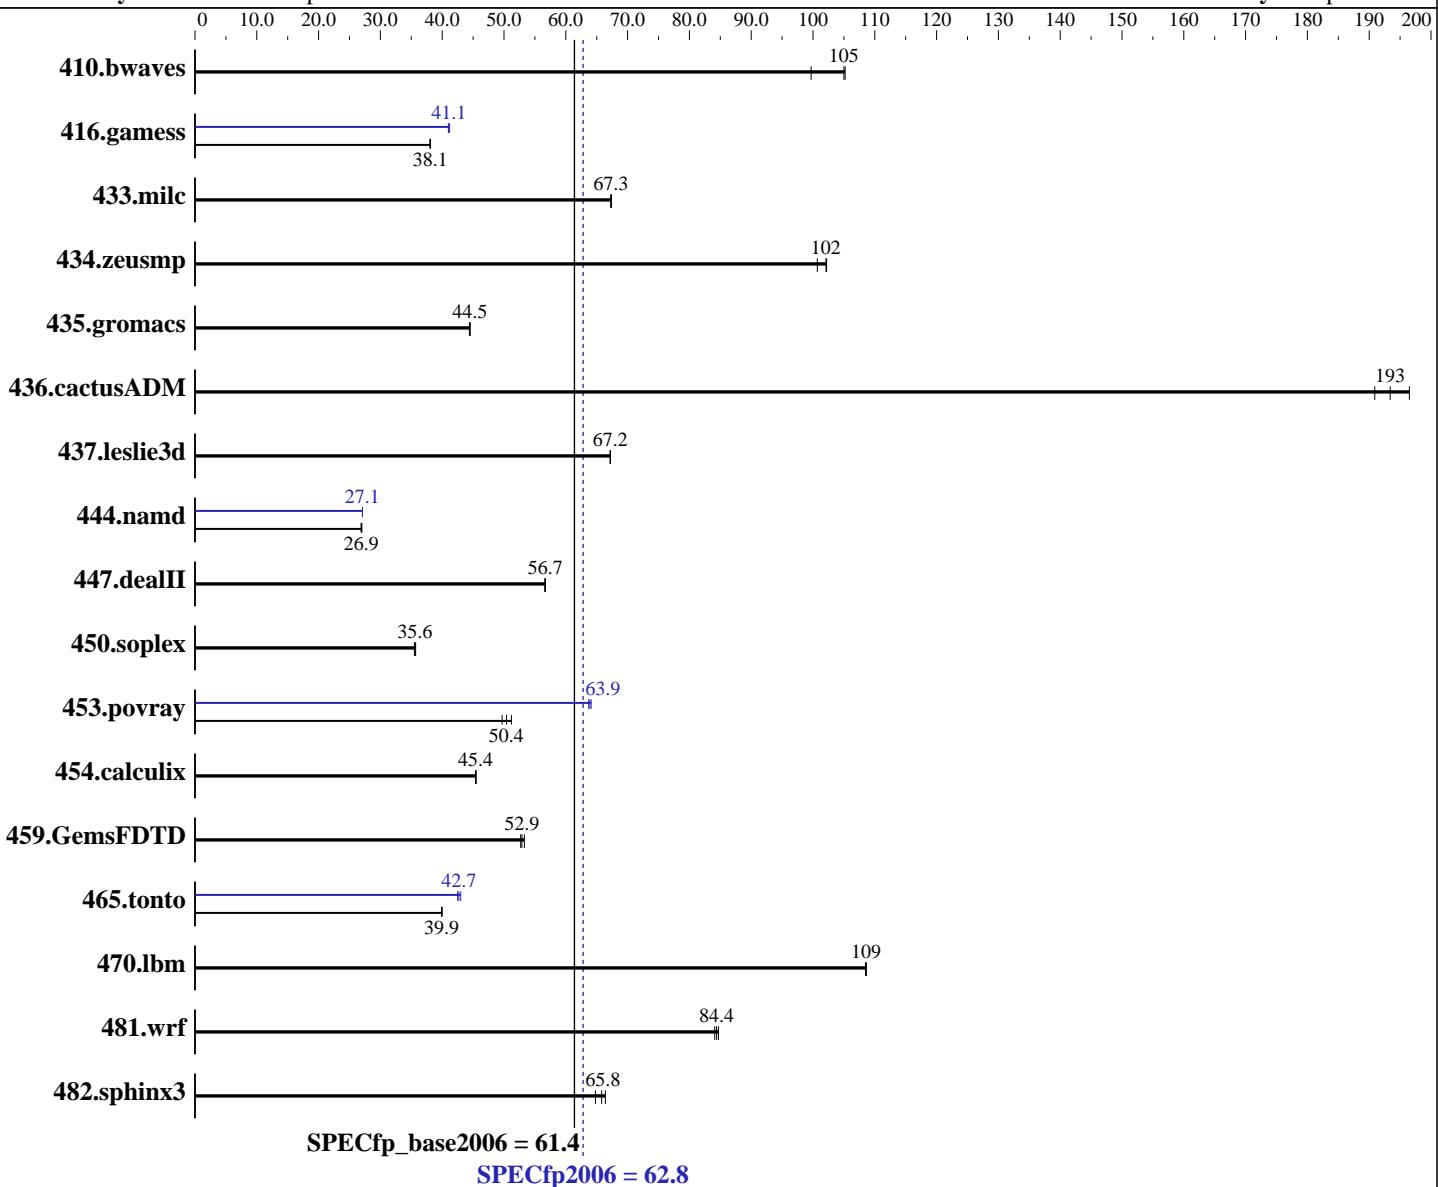

Hardware

CPU Name: Intel Core i5-4570
CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz: 3200
FPU: Integrated
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
CPU(s) orderable: 1 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Microsoft Windows 7 Enterprise 6.1.7601 Service Pack 1 Build 7601
Compiler: C/C++: Version 13.1.1.171 of Intel C++ Studio XE for Windows;
Fortran: Version 13.1.1.171 of Intel Fortran Studio XE for Windows;
Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
Auto Parallel: Yes

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DQ87PG motherboard (Intel Core i5-4570)

SPECfp2006 = 62.8

SPECfp_base2006 = 61.4

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Oct-2013

Hardware Availability: Jul-2013

Software Availability: Apr-2013

L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 4 GB (2 x 2 GB 1Rx8 PC3-12800U-11)
 Disk Subsystem: 250 GB Seagate SATA HDD, 7200 RPM
 Other Hardware: None

File System: NTFS
 System State: Default
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 10.0 from
<http://www.microquill.com/>

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	129	105	<u>129</u>	<u>105</u>	136	99.7	129	105	<u>129</u>	<u>105</u>	136	99.7
416.gamess	514	38.1	514	38.1	516	38.0	476	41.2	477	41.0	477	41.1
433.milc	136	67.3	136	67.4	137	67.3	136	67.3	136	67.4	137	67.3
434.zeusmp	90.4	101	89.1	102	89.0	102	90.4	101	89.1	102	89.0	102
435.gromacs	160	44.5	161	44.5	161	44.4	160	44.5	161	44.5	161	44.4
436.cactusADM	61.8	193	62.6	191	60.8	197	61.8	193	62.6	191	60.8	197
437.leslie3d	140	67.2	140	67.2	140	67.2	140	67.2	140	67.2	140	67.2
444.namd	298	26.9	298	27.0	298	26.9	296	27.1	296	27.1	296	27.1
447.dealII	202	56.6	202	56.7	202	56.7	202	56.6	202	56.7	202	56.7
450.soplex	233	35.7	234	35.6	235	35.5	233	35.7	234	35.6	235	35.5
453.povray	107	49.7	106	50.4	104	51.2	83.3	63.9	83.0	64.1	83.5	63.7
454.calculix	181	45.5	182	45.4	182	45.4	181	45.5	182	45.4	182	45.4
459.GemsFDTD	202	52.7	200	52.9	199	53.3	202	52.7	200	52.9	199	53.3
465.tonto	246	40.0	247	39.9	247	39.9	232	42.5	230	42.7	229	43.0
470.lbm	127	109	127	109	127	109	127	109	127	109	127	109
481.wrf	132	84.7	133	84.1	132	84.4	132	84.7	133	84.1	132	84.4
482.sphinx3	301	64.8	296	65.8	294	66.4	301	64.8	296	65.8	294	66.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler 13.1 was set up to generate 64-bit binaries with the command:

"ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

Platform Notes

Sysinfo program C:\SPEC13.1\Docs\sysinfo
 \$Rev: 6775 \$ \$Date::: 2011-08-16 #\\$ \8787f7622badcf24e01c368b1db4377c
 running on Clt7C05070FB2B7 Tue Oct 1 12:05:10 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
 Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DQ87PG motherboard (Intel Core i5-4570)

SPECfp2006 = 62.8

CPU2006 license: 13

Test date: Oct-2013

Test sponsor: Intel Corporation

Hardware Availability: Jul-2013

Tested by: Intel Corporation

Software Availability: Apr-2013

Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
Trying 'systeminfo'
OS Name      : Microsoft Windows 7 Enterprise
OS Version   : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: INTEL_
System Model  : DQ87PG_
Processor(s) : 1 Processor(s) Installed.
               [01]: Intel64 Family 6 Model 60 Stepping 3 GenuineIntel ~3201 Mhz
BIOS Version  : Intel(R) Corp. PGQ8710H.86A.0036.2013.0702.1908, 7/2/2013
Total Physical Memory: 3,749 MB
```

```
Trying 'wmic cpu get /value'
DeviceID     : CPU0
L2CacheSize  : 1024
L3CacheSize  : 6144
MaxClockSpeed: 3201
Name         : Intel(R) Core(TM) i5-4570 CPU @ 3.20GHz
NumberOfCores: 4
NumberOfLogicalProcessors: 4
```

```
(End of data from sysinfo program)
BIOS: SATA mode set to RAID
Windows Disk Driver: Intel Rapid Storage Technology 12.5.0.1066
Windows Chipset Driver: Intel Chipset Driver 9.4.0.1027
```

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
Micron MT8JTF25664AZ-1G6 Series Memory DIMMs

General Notes

OMP_NUM_THREADS set to number of processors cores
KMP_AFFINITY set to granularity=fine,scatter
Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:

```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc10
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DQ87PG motherboard (Intel Core i5-4570)

SPECfp2006 =

62.8

SPECfp_base2006 =

61.4

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date:

Oct-2013

Hardware Availability: Jul-2013

Software Availability: Apr-2013

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 -names:lowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
-Qoption_cpp,--ms_incompat_treatment_of_commas_in_macros
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_NEED_INVHYP -DNEED_INVHYP
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:

-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch -Qauto-ilp32 /F10000000000

C++ benchmarks:

-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch -Qcxx-features -Qauto-ilp32 /F10000000000 shlW64M.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:

-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch /F10000000000

Benchmarks using both Fortran and C:

-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch -Qauto-ilp32 /F10000000000



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 62.8

Intel DQ87PG motherboard (Intel Core i5-4570)

SPECfp_base2006 = 61.4

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Oct-2013

Hardware Availability: Jul-2013

Software Availability: Apr-2013

Peak Compiler Invocation

C benchmarks:

```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc10
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
icl -Qvc10 -Qstd=c99 ifort
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
433.milc: basepeak = yes
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: basepeak = yes
```

C++ benchmarks:

```
444.namd: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
           -Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000
           shlw64M.lib           -link /FORCE:MULTIPLE
```

```
447.dealII: basepeak = yes
```

```
450.soplex: basepeak = yes
```

```
453.povray: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
            -Qipo -O3 -Qprec-div- -Qunroll14 -Qansi-alias -Qauto-ilp32
            /F1000000000 shlw64M.lib           -link /FORCE:MULTIPLE
```

Fortran benchmarks:

```
410.bwaves: basepeak = yes
```

```
416.gamess: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
            -Qipo -O3 -Qprec-div- -Qunroll12 -Ob0 -Qansi-alias
            -Qscalar-rep- /F1000000000
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DQ87PG motherboard (Intel Core i5-4570)

SPECfp2006 = 62.8

SPECfp_base2006 = 61.4

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Oct-2013

Hardware Availability: Jul-2013

Software Availability: Apr-2013

Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll14 -Qauto -Qinline-calloc
/F10000000000

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Sep 9 10:56:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 15 July 2014.