



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp®_rate2006 = 71.5

Intel DQ87PG motherboard (Intel Pentium G3430)

SPECfp_rate_base2006 = 70.7

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Sep-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2012

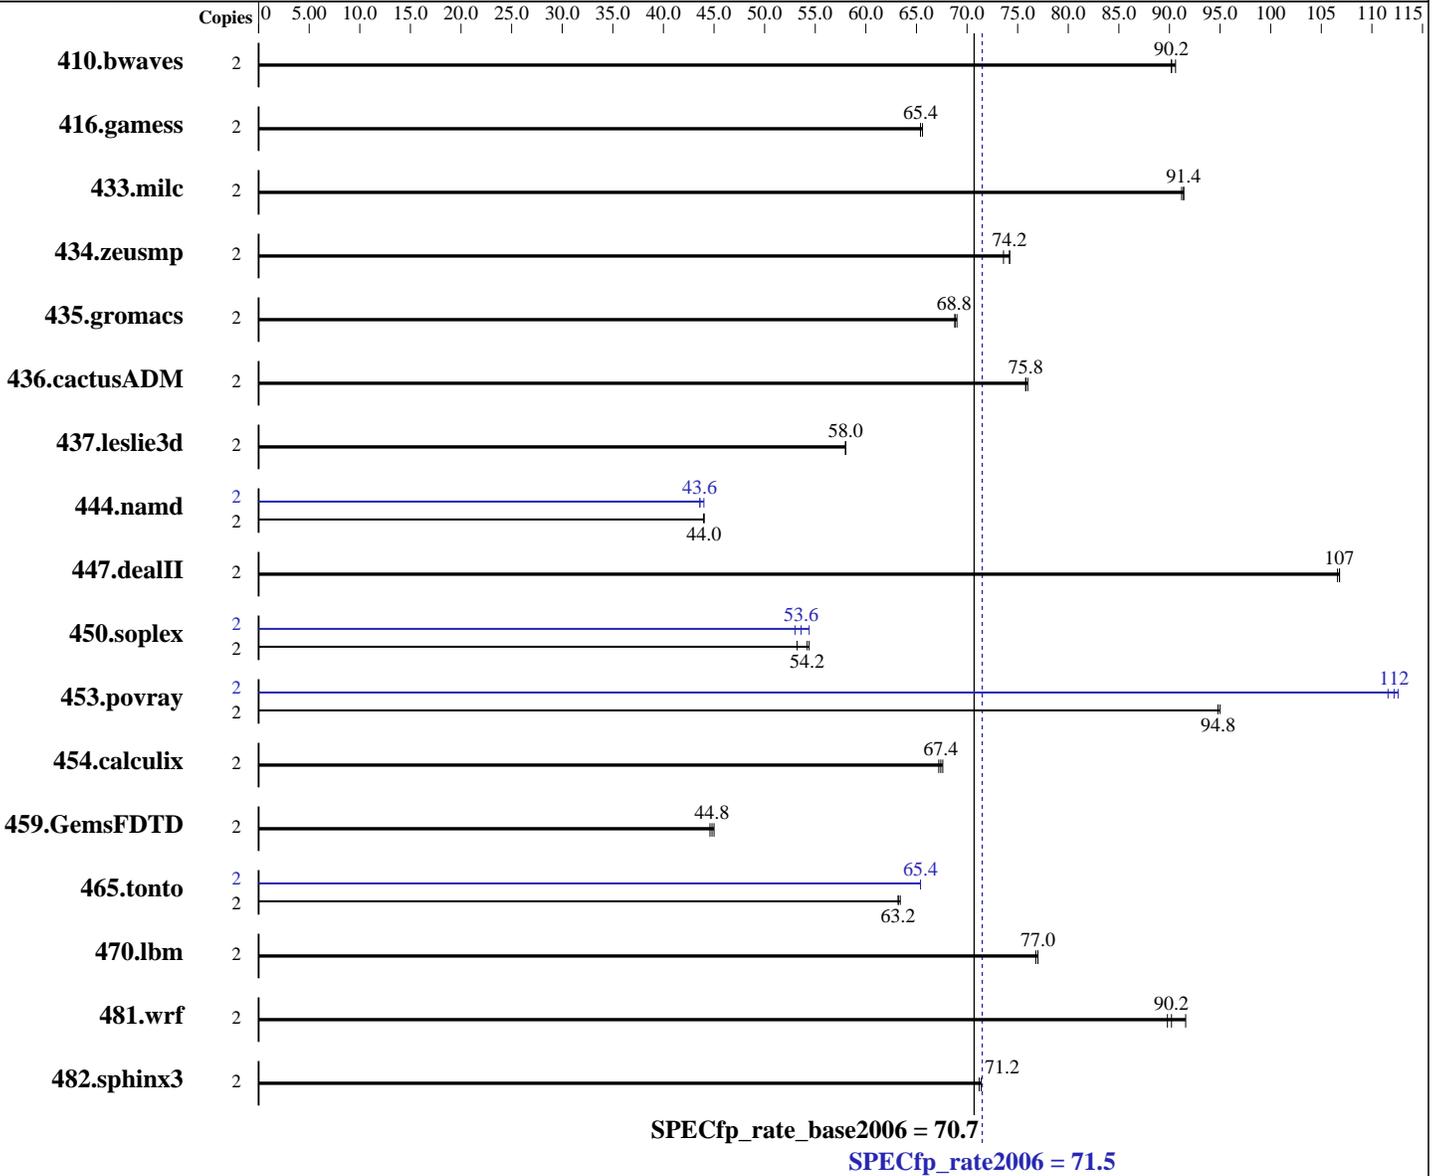

Hardware

CPU Name: Intel Pentium G3430
 CPU Characteristics:
 CPU MHz: 3300
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Microsoft Windows 7 Enterprise
 6.1.7601 Service Pack 1 Build 7601
 Compiler: C/C++: Version 13.1.1.171 of Intel C++ Studio XE
 for Windows;
 Fortran: Version 13.1.1.171 of Intel Fortran
 Studio XE for Windows;
 Libraries: Version 15.00.30729.01 of Microsoft
 Visual Studio 2008 Professional SP1
 Auto Parallel: No

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = **71.5**

Intel DQ87PG motherboard (Intel Pentium G3430)

SPECfp_rate_base2006 = 70.7

CPU2006 license: 13

Test date: Sep-2013

Test sponsor: Intel Corporation

Hardware Availability: Sep-2013

Tested by: Intel Corporation

Software Availability: Sep-2012

L3 Cache: 3 MB I+D on chip per chip
 Other Cache: None
 Memory: 4 GB (2 x 2 GB 1Rx8 PC3-12800U-11)
 Disk Subsystem: 250 GB Seagate SATA HDD, 7200 RPM
 Other Hardware: None

File System: NTFS
 System State: Default
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	<u>301</u>	<u>90.2</u>	302	90.2	300	90.6	2	<u>301</u>	<u>90.2</u>	302	90.2	300	90.6
416.gamess	2	597	65.6	<u>598</u>	<u>65.4</u>	599	65.4	2	597	65.6	<u>598</u>	<u>65.4</u>	599	65.4
433.milc	2	201	91.2	201	91.4	<u>201</u>	<u>91.4</u>	2	201	91.2	201	91.4	<u>201</u>	<u>91.4</u>
434.zeusmp	2	247	73.6	<u>245</u>	<u>74.2</u>	245	74.2	2	247	73.6	<u>245</u>	<u>74.2</u>	245	74.2
435.gromacs	2	207	69.0	<u>207</u>	<u>68.8</u>	207	68.8	2	207	69.0	<u>207</u>	<u>68.8</u>	207	68.8
436.cactusADM	2	<u>315</u>	<u>75.8</u>	316	75.8	315	76.0	2	<u>315</u>	<u>75.8</u>	316	75.8	315	76.0
437.leslie3d	2	324	58.0	324	58.0	<u>324</u>	<u>58.0</u>	2	324	58.0	324	58.0	<u>324</u>	<u>58.0</u>
444.namd	2	364	44.0	<u>364</u>	<u>44.0</u>	364	44.0	2	368	43.6	364	44.0	<u>368</u>	<u>43.6</u>
447.dealII	2	214	107	<u>214</u>	<u>107</u>	215	107	2	214	107	<u>214</u>	<u>107</u>	215	107
450.soplex	2	314	53.2	<u>307</u>	<u>54.2</u>	307	54.4	2	315	53.0	306	54.4	<u>311</u>	<u>53.6</u>
453.povray	2	<u>112</u>	<u>94.8</u>	112	94.8	112	95.0	2	95.4	112	<u>94.8</u>	<u>112</u>	94.5	113
454.calculix	2	244	67.6	246	67.2	<u>245</u>	<u>67.4</u>	2	244	67.6	246	67.2	<u>245</u>	<u>67.4</u>
459.GemsFDTD	2	472	45.0	475	44.6	<u>473</u>	<u>44.8</u>	2	472	45.0	475	44.6	<u>473</u>	<u>44.8</u>
465.tonto	2	<u>311</u>	<u>63.2</u>	311	63.4	311	63.2	2	<u>301</u>	<u>65.4</u>	301	65.4	301	65.4
470.lbm	2	357	76.8	357	77.0	<u>357</u>	<u>77.0</u>	2	357	76.8	357	77.0	<u>357</u>	<u>77.0</u>
481.wrf	2	249	89.8	244	91.6	<u>248</u>	<u>90.2</u>	2	249	89.8	244	91.6	<u>248</u>	<u>90.2</u>
482.sphinx3	2	547	71.4	<u>547</u>	<u>71.2</u>	547	71.2	2	547	71.4	<u>547</u>	<u>71.2</u>	547	71.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler 13.0 was set up to generate 64-bit binaries with the command:
 "ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

Submit Notes

Processes were bound to specific processors using the start command with the /affinity switch. The config file option 'submit' was used to generate the affinity mask for each process.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 71.5

Intel DQ87PG motherboard (Intel Pentium G3430)

SPECfp_rate_base2006 = 70.7

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Sep-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2012

Platform Notes

Sysinfo program C:\SPEC13.1/Docs/sysinfo
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c
running on Clt7C05070FB2B7 Mon Sep 23 19:43:34 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Trying 'systeminfo'

OS Name : Microsoft Windows 7 Enterprise
OS Version : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: INTEL_
System Model : DQ87PG__
Processor(s) : 1 Processor(s) Installed.
 [01]: Intel64 Family 6 Model 60 Stepping 3 GenuineIntel ~3300 Mhz
BIOS Version : Intel(R) Corp. PGQ8710H.86A.0036.2013.0702.1908, 7/2/2013
Total Physical Memory: 3,749 MB

Trying 'wmic cpu get /value'

DeviceID : CPU0
L2CacheSize : 512
L3CacheSize : 3072
MaxClockSpeed : 3300
Name : Intel(R) Pentium(R) CPU G3430 @ 3.30GHz
NumberOfCores : 2
NumberOfLogicalProcessors: 2

(End of data from sysinfo program)

BIOS: SATA mode set to RAID
Windows Disk Driver: Intel Rapid Storage Technology 12.5.0.1066
Windows Chipset Driver: Intel Chipset Driver 9.4.0.1027

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
Micron MT8JTF25664AZ-1G6 Series Memory DIMMs

General Notes

Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 71.5

Intel DQ87PG motherboard (Intel Pentium G3430)

SPECfp_rate_base2006 = 70.7

CPU2006 license: 13

Test date: Sep-2013

Test sponsor: Intel Corporation

Hardware Availability: Sep-2013

Tested by: Intel Corporation

Software Availability: Sep-2012

Base Compiler Invocation (Continued)

C++ benchmarks:

icl -Qvc10

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: /Qlowercase

436.cactusADM: -Qlowercase /assume:underscore

444.namd: /TP

447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG

-Qoption,cpp,--ms_incompat_treatment_of_commas_in_macros

453.povray: -DSPEC_CPU_NEED_INVHYP -DNEED_INVHYP

454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase

481.wrf: -DSPEC_CPU_WINDOWS_ICL

Base Optimization Flags

C benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F1000000000 -link /FORCE:MULTIPLE

C++ benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qcxx-features /F1000000000 shlw32M.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F1000000000 -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F1000000000 -link /FORCE:MULTIPLE

Peak Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 71.5

Intel DQ87PG motherboard (Intel Pentium G3430)

SPECfp_rate_base2006 = 70.7

CPU2006 license: 13

Test date: Sep-2013

Test sponsor: Intel Corporation

Hardware Availability: Sep-2013

Tested by: Intel Corporation

Software Availability: Sep-2012

Peak Compiler Invocation (Continued)

C++ benchmarks:

ic1 -Qvc10

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ic1 -Qvc10 -Qstd=c99 ifort

Peak Portability Flags

410.bwaves: /Qlowercase

436.cactusADM: -Qlowercase /assume:underscore

444.namd: /TP

447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG

-Qoption,cpp,--ms_incompat_treatment_of_commas_in_macros

453.povray: -DSPEC_CPU_NEED_INVHYP -DNEED_INVHYP

454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase

481.wrf: -DSPEC_CPU_WINDOWS_ICL

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)

-Qipo -O3 -Qprec-div- -Oa /F1000000000 sh1W32M.lib

-link /FORCE:MULTIPLE

447.dealII: basepeak = yes

450.soplex: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)

-Qipo -O3 /F1000000000 sh1W32M.lib

-link /FORCE:MULTIPLE

453.povray: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)

-Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

sh1W32M.lib -link /FORCE:MULTIPLE

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 71.5

Intel DQ87PG motherboard (Intel Pentium G3430)

SPECfp_rate_base2006 = 70.7

CPU2006 license: 13

Test date: Sep-2013

Test sponsor: Intel Corporation

Hardware Availability: Sep-2013

Tested by: Intel Corporation

Software Availability: Sep-2012

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000
-link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Fri Jul 25 00:23:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 July 2014.