SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DQ87PG motherboard (Intel Pentium G3220T)

SPECint®2006 = 37.9

SPECint_base2006 = 36.3

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Nov-2013
Hardware Availability: Sep-2013
Software Availability: Apr-2013

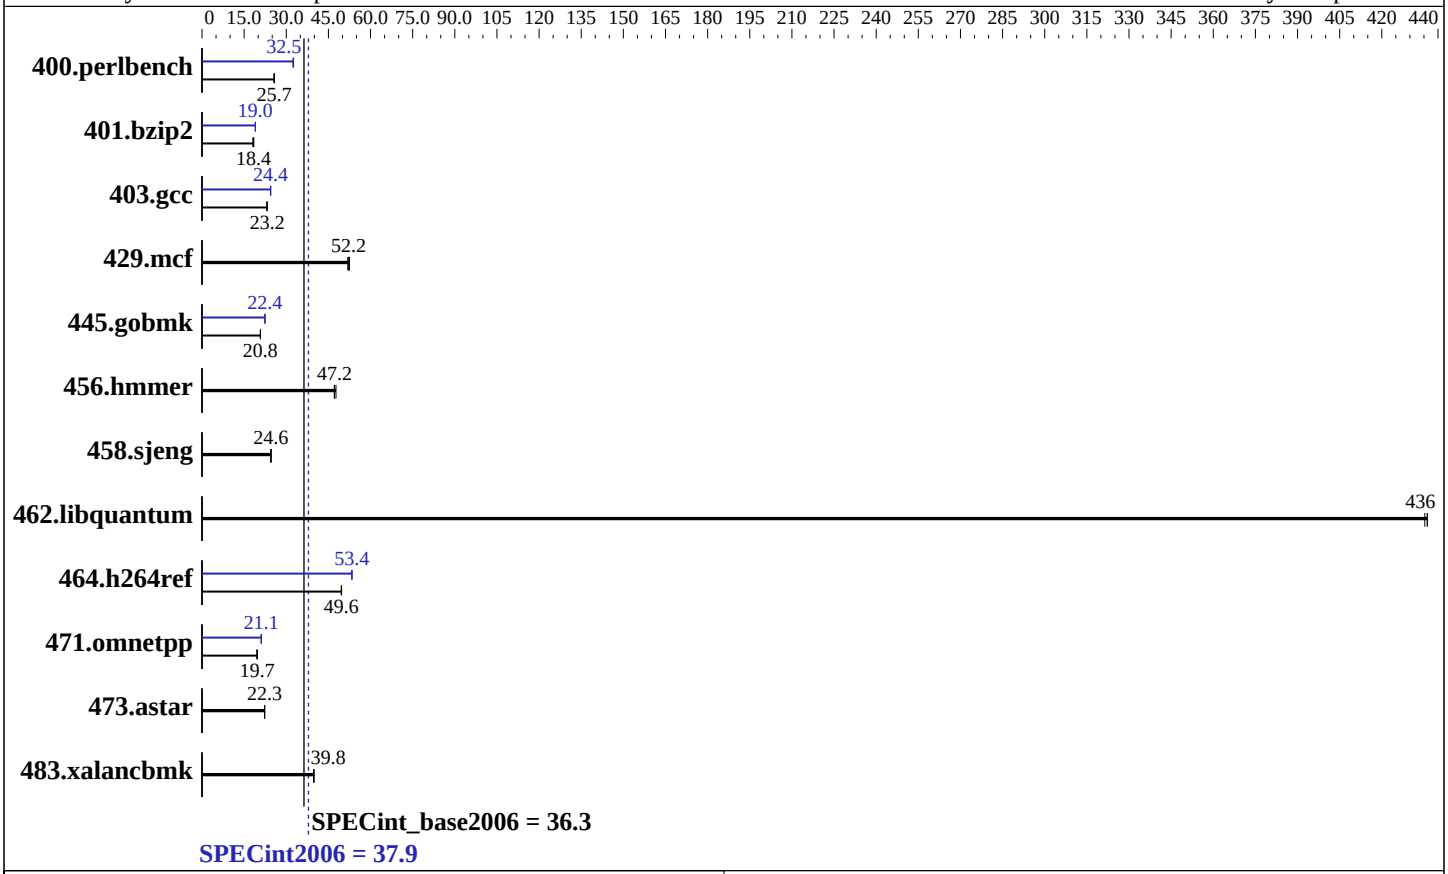

Hardware

CPU Name:	Intel Pentium G3220T
CPU Characteristics:	
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	3 MB I+D on chip per chip
Other Cache:	None
Memory:	4 GB (2 x 2 GB 1Rx8 PC3-12800U-11, running at 1333 MHz and CL9)
Disk Subsystem:	250 GB Seagate SATA HDD, 7200 RPM
Other Hardware:	None

Software

Operating System:	Microsoft Windows 7 Enterprise 6.1.7601 Service Pack 1 Build 7601
Compiler:	C/C++: Version 13.1.1.171 of Intel C++ Studio XE for Windows; Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
Auto Parallel:	Yes
File System:	NTFS
System State:	Default
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap Library Version 10.0 from http://www.microquill.com/

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DQ87PG motherboard (Intel Pentium G3220T)

SPECint2006 = 37.9

SPECint_base2006 = 36.3

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Nov-2013
Hardware Availability: Sep-2013
Software Availability: Apr-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	379	25.8	381	25.6	**380**	**25.7**	**301**	**32.5**	300	32.6	302	32.4
401.bzip2	534	18.1	524	18.4	**524**	**18.4**	508	19.0	**508**	**19.0**	507	19.0
403.gcc	**348**	**23.2**	348	23.1	348	23.2	329	24.5	330	24.4	**330**	**24.4**
429.mcf	174	52.5	**175**	**52.2**	176	51.9	174	52.5	**175**	**52.2**	176	51.9
445.gobmk	**504**	**20.8**	504	20.8	505	20.8	469	22.4	**468**	**22.4**	468	22.4
456.hmmer	**198**	**47.2**	198	47.1	196	47.7	**198**	**47.2**	198	47.1	196	47.7
458.sjeng	494	24.5	492	24.6	**492**	**24.6**	494	24.5	492	24.6	**492**	**24.6**
462.libquantum	47.5	436	47.6	435	**47.5**	**436**	47.5	436	47.6	435	**47.5**	**436**
464.h264ref	**446**	**49.6**	446	49.6	446	49.7	414	53.4	**415**	**53.4**	415	53.3
471.omnetpp	320	19.5	317	19.7	**317**	**19.7**	**296**	**21.1**	297	21.1	296	21.1
473.astar	**315**	**22.3**	315	22.3	315	22.3	**315**	**22.3**	315	22.3	315	22.3
483.xalancbmk	**173**	**39.8**	173	39.9	174	39.7	**173**	**39.8**	173	39.9	174	39.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
To compile these binaries, the Intel Compiler 13.1 was set up to
generate 64-bit binaries with the command:
"ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r)
Parallel Studio XE 2013 program folder)
```

Platform Notes

```
Sysinfo program C:\SPEC13.1/Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #$ \8787f7622badcf24e01c368b1db4377c
running on Clt00224D4FB715 Sat Nov 23 09:13:36 2013

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

Trying 'systeminfo'
OS Name        : Microsoft Windows 7 Enterprise
OS Version     : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: INTEL_
System Model   : DQ87PG__
Processor(s)   : 1 Processor(s) Installed.
     [01]: Intel64 Family 6 Model 60 Stepping 3 GenuineIntel ~2600 Mhz
BIOS Version   : Intel(R) Corp. PGQ8710H.86A.0036.2013.0702.1908, 7/2/2013
Total Physical Memory: 3,749 MB

Trying 'wmic cpu get /value'
DeviceID       : CPU0
```

Continued on next page

Platform Notes (Continued)

```
 L2CacheSize   : 512
 L3CacheSize   : 3072
 MaxClockSpeed : 2600
 Name          : Intel(R) Pentium(R) CPU G3220T @ 2.60GHz
 NumberOfCores : 2
 NumberOfLogicalProcessors: 2

 (End of data from sysinfo program)
BIOS: SATA mode set to RAID
Windows Disk Driver: Intel Rapid Storage Technology 12.5.0.1066
Windows Chipset Driver: Intel Chipset Driver 9.4.0.1027
```

Component Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
Micron MT8JTF25664AZ-1G6 Series Memory DIMMs
```

General Notes

```
OMP_NUM_THREADS set to number of processors cores
KMP_AFFINITY set to granularity=fine,scatter
Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc10
```

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64_X64
               -DSPEC_CPU_NO_NEED_VA_COPY
  401.bzip2: -DSPEC_CPU_P64
    403.gcc: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64
    429.mcf: -DSPEC_CPU_P64
  445.gobmk: -DSPEC_CPU_P64
  456.hmmer: -DSPEC_CPU_P64
  458.sjeng: -DSPEC_CPU_P64
462.libquantum: -DSPEC_CPU_P64
  464.h264ref: -DSPEC_CPU_P64 -DWIN32 -DSPEC_CPU_NO_INTTYPES
```

Continued on next page

Base Portability Flags (Continued)

471.omnetpp: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64
473.astar: -DSPEC_CPU_P64
483.xalancbmk: -DSPEC_CPU_P64 -Qoption,cpp,--no_wchar_t_keyword

Base Optimization Flags

C benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel
-Qauto-ilp32 /F512000000

C++ benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
-Qauto-ilp32 /F512000000 shlW64M.lib -link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks:
icl -Qvc10 -Qstd=c99

C++ benchmarks:
icl -Qvc10

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

400.perlbench: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F512000000 shlW64M.lib
-link /FORCE:MULTIPLE

Continued on next page

Peak Optimization Flags (Continued)

401.bzip2: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias -Qauto-ilp32 /F512000000

403.gcc: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qauto-ilp32 /F512000000

429.mcf: basepeak = yes

445.gobmk: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O2 -Qprec-div- -Qansi-alias -Qauto-ilp32 /F512000000

456.hmmer: basepeak = yes

458.sjeng: basepeak = yes

462.libquantum: basepeak = yes

464.h264ref: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias -Qauto-ilp32 /F512000000

C++ benchmarks:

471.omnetpp: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-ra-region-strategy=block -Qauto-ilp32 /F512000000 shlW64M.lib -link /FORCE:MULTIPLE

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Fri Jul 25 00:46:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 July 2014.