SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DQ87PG motherboard (Intel Pentium G3430)

SPECint®2006 = 46.2

SPECint_base2006 = 44.0

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Sep-2013
Hardware Availability: Sep-2013
Software Availability: Sep-2012

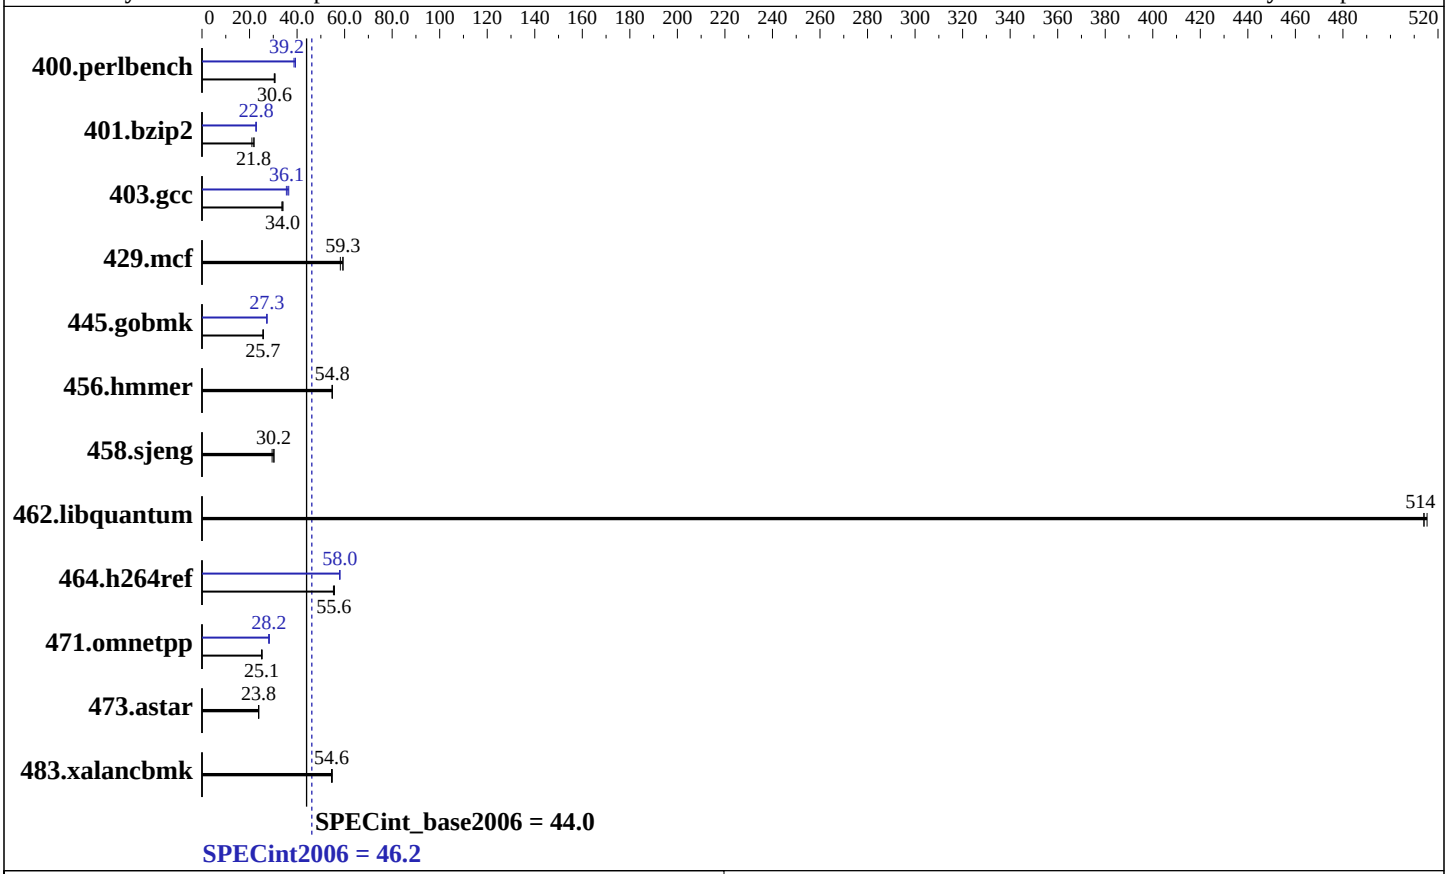

Hardware

CPU Name:	Intel Pentium G3430
CPU Characteristics:	
CPU MHz:	3300
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	3 MB I+D on chip per chip
Other Cache:	None
Memory:	4 GB (2 x 2 GB 1Rx8 PC3-12800U-11)
Disk Subsystem:	250 GB Seagate SATA HDD, 7200 RPM
Other Hardware:	None

Software

Operating System:	Microsoft Windows 7 Enterprise 6.1.7601 Service Pack 1 Build 7601
Compiler:	C/C++: Version 13.1.1.171 of Intel C++ Studio XE for Windows; Libraries: Version 15.00.30729.01 of Microsoft Visual Studio 2008 Professional SP1
Auto Parallel:	Yes
File System:	NTFS
System State:	Default
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap Library Version 10.0 from http://www.microquill.com/

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DQ87PG motherboard (Intel Pentium G3430)

SPECint2006 = 46.2

SPECint_base2006 = 44.0

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Sep-2013
Hardware Availability: Sep-2013
Software Availability: Sep-2012

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	321	30.4	**319**	**30.6**	318	30.7	249	39.3	**249**	**39.2**	253	38.7
401.bzip2	459	21.0	**442**	**21.8**	440	21.9	424	22.7	424	22.8	**424**	**22.8**
403.gcc	239	33.6	237	34.0	**237**	**34.0**	220	36.5	**223**	**36.1**	227	35.5
429.mcf	157	58.2	154	59.3	**154**	**59.3**	157	58.2	154	59.3	**154**	**59.3**
445.gobmk	**408**	**25.7**	408	25.7	407	25.8	384	27.3	**384**	**27.3**	384	27.3
456.hmmer	170	54.8	**170**	**54.8**	170	54.8	170	54.8	**170**	**54.8**	170	54.8
458.sjeng	400	30.3	**401**	**30.2**	410	29.5	400	30.3	**401**	**30.2**	410	29.5
462.libquantum	**40.3**	**514**	40.2	515	40.3	514	**40.3**	**514**	40.2	515	40.3	514
464.h264ref	**398**	**55.6**	397	55.7	400	55.3	382	57.9	**382**	**58.0**	381	58.0
471.omnetpp	248	25.3	**249**	**25.1**	249	25.1	221	28.3	**221**	**28.2**	222	28.1
473.astar	**294**	**23.8**	294	23.8	294	23.9	**294**	**23.8**	294	23.8	294	23.9
483.xalancbmk	**126**	**54.6**	126	54.8	127	54.5	**126**	**54.6**	126	54.8	127	54.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
To compile these binaries, the Intel Compiler 13.0 was set up to
generate 64-bit binaries with the command:
"ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r)
Parallel Studio XE 2013 program folder)
```

Platform Notes

```
Sysinfo program C:\SPEC13.1/Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #$ \8787f7622badcf24e01c368b1db4377c
running on Clt7C05070FB2B7 Mon Sep 23 00:49:45 2013

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

Trying 'systeminfo'
OS Name       : Microsoft Windows 7 Enterprise
OS Version    : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: INTEL_
System Model  : DQ87PG__
Processor(s)  : 1 Processor(s) Installed.
     [01]: Intel64 Family 6 Model 60 Stepping 3 GenuineIntel ~3300 Mhz
BIOS Version  : Intel(R) Corp. PGQ8710H.86A.0036.2013.0702.1908, 7/2/2013
Total Physical Memory: 3,749 MB

Trying 'wmic cpu get /value'
DeviceID      : CPU0
```

Continued on next page

Platform Notes (Continued)

```
 L2CacheSize   : 512
 L3CacheSize   : 3072
 MaxClockSpeed : 3300
 Name          : Intel(R) Pentium(R) CPU G3430 @ 3.30GHz
 NumberOfCores : 2
 NumberOfLogicalProcessors: 2

 (End of data from sysinfo program)
BIOS: SATA mode set to RAID
Windows Disk Driver: Intel Rapid Storage Technology 12.5.0.1066
Windows Chipset Driver: Intel Chipset Driver 9.4.0.1027
```

Component Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
Micron MT8JTF25664AZ-1G6 Series Memory DIMMs
```

General Notes

```
OMP_NUM_THREADS set to number of processors cores
KMP_AFFINITY set to granularity=fine,scatter
Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc10
```

Base Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DWIN32 -DSPEC_CPU_NO_INTTYPES`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Base Optimization Flags

C benchmarks:

```
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel
/F512000000
```

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F512000000 shlW32M.lib -link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks:
icl -Qvc10 -Qstd=c99

C++ benchmarks:
icl -Qvc10

Peak Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword

Peak Optimization Flags

C benchmarks:

400.perlbench: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F512000000 shlW32M.lib -link /FORCE:MULTIPLE

401.bzip2: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias
/F512000000

403.gcc: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- /F512000000

429.mcf: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

445.gobmk: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O2 -Qprec-div- -Qansi-alias /F512000000`

456.hmmer: `basepeak = yes`

458.sjeng: `basepeak = yes`

462.libquantum: `basepeak = yes`

464.h264ref: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000`

C++ benchmarks:

471.omnetpp: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-ra-region-strategy=block /F512000000 shlW32M.lib -link /FORCE:MULTIPLE`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Fri Jul 25 00:31:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 July 2014.