SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DQ87PG motherboard (Intel Pentium G3430)

SPECint®_rate2006 = 80.3

SPECint_rate_base2006 = 76.9

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Sep-2013
Hardware Availability: Sep-2013
Software Availability: Sep-2012

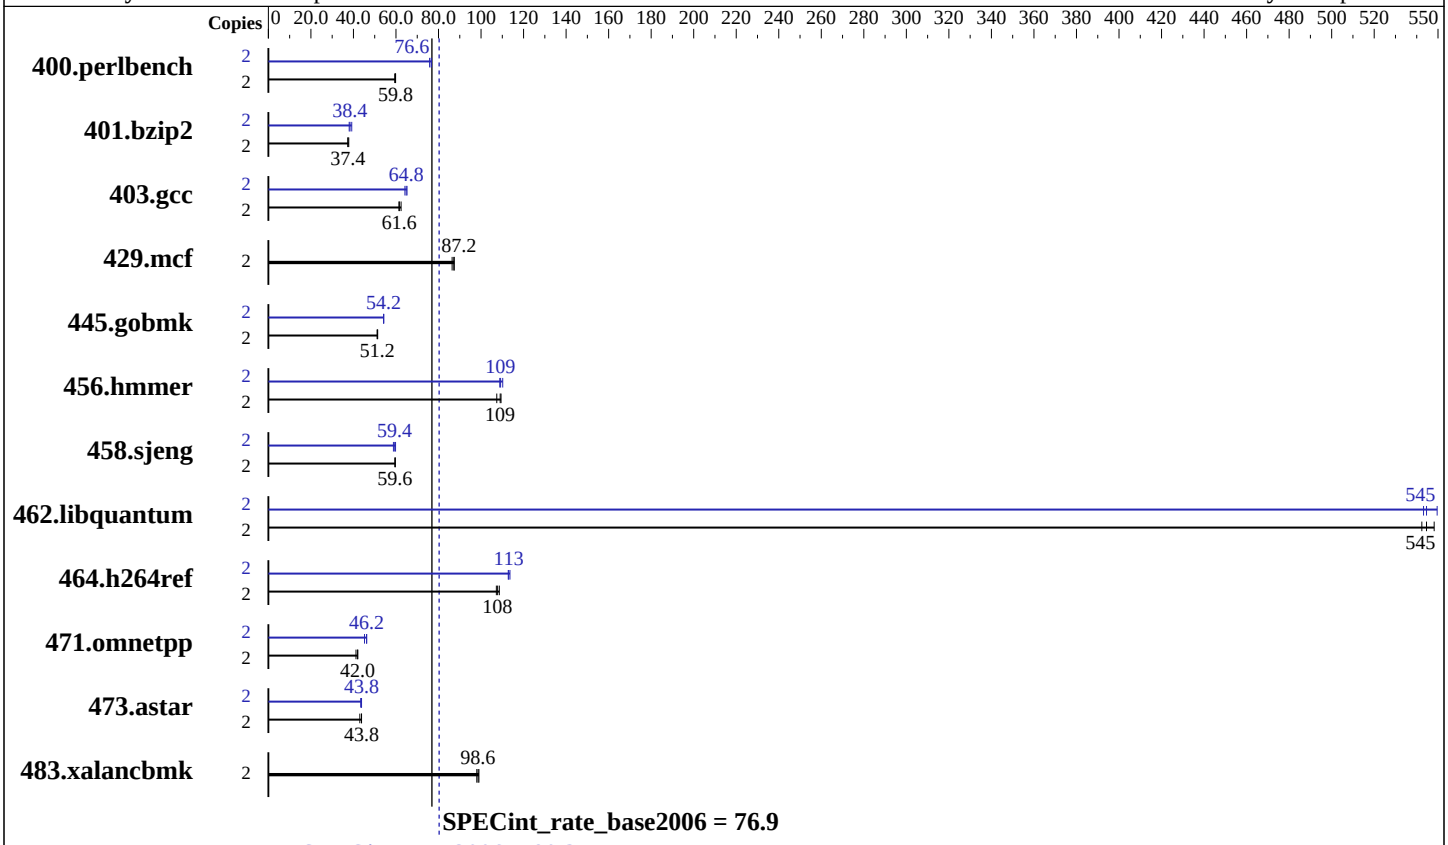

Hardware

CPU Name:	Intel Pentium G3430
CPU Characteristics:	
CPU MHz:	3300
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	3 MB I+D on chip per chip
Other Cache:	None
Memory:	4 GB (2 x 2 GB 1Rx8 PC3-12800U-11)
Disk Subsystem:	250 GB Seagate SATA HDD, 7200 RPM
Other Hardware:	None

Software

Operating System:	Microsoft Windows 7 Enterprise 6.1.7601 Service Pack 1 Build 7601
Compiler:	C/C++: Version 13.1.1.171 of Intel C++ Studio XE for Windows; Libraries: Version 15.00.30729.01 of Microsoft Visual Studio 2008 Professional SP1
Auto Parallel:	No
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap Library Version 10.0 from http://www.microquill.com/

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Intel DQ87PG motherboard (Intel Pentium G3430)

SPECint_rate2006 = 80.3

SPECint_rate_base2006 = 76.9

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Sep-2013
Hardware Availability: Sep-2013
Software Availability: Sep-2012

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	2	327	59.8	329	59.4	**327**	**59.8**	2	258	75.8	255	76.6	**255**	**76.6**
401.bzip2	2	517	37.4	**516**	**37.4**	511	37.8	2	**501**	**38.4**	507	38.0	493	39.2
403.gcc	2	**262**	**61.6**	262	61.4	258	62.4	2	247	65.2	251	64.2	**249**	**64.8**
429.mcf	2	211	86.4	**209**	**87.2**	209	87.4	2	211	86.4	**209**	**87.2**	209	87.4
445.gobmk	2	**409**	**51.2**	409	51.4	409	51.2	2	**388**	**54.2**	388	54.2	387	54.2
456.hmmer	2	**171**	**109**	171	109	174	107	2	169	110	171	109	**171**	**109**
458.sjeng	2	**406**	**59.6**	406	59.6	407	59.6	2	412	58.8	**408**	**59.4**	405	59.8
462.libquantum	2	**76.1**	**545**	75.6	548	76.4	542	2	76.3	543	**76.1**	**545**	75.4	550
464.h264ref	2	413	107	407	109	**411**	**108**	2	**392**	**113**	392	113	390	114
471.omnetpp	2	**298**	**42.0**	304	41.2	298	42.0	2	277	45.2	**271**	**46.2**	271	46.2
473.astar	2	320	43.8	**321**	**43.8**	326	43.0	2	321	43.8	**321**	**43.8**	324	43.4
483.xalancbmk	2	**140**	**98.6**	140	99.0	141	98.0	2	**140**	**98.6**	140	99.0	141	98.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
To compile these binaries, the Intel Compiler 13.0 was set up to
generate 32-bit binaries with the command:
"ipsxe-comp-vars.bat ia32 vs2010" (shortcut provided in the Intel(r)
Parallel Studio XE 2013 program folder)
```

Submit Notes

```
Processes were bound to specific processors using the start command with the /affinity switch.
The config file option 'submit' was used to generate the affinity mask for each process.
```

Platform Notes

```
Sysinfo program C:\SPEC13.1/Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #$ \8787f7622badcf24e01c368b1db4377c
running on Clt7C05070FB2B7 Mon Sep 23 13:35:25 2013

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

Trying 'systeminfo'
OS Name       : Microsoft Windows 7 Enterprise
OS Version    : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: INTEL_
System Model  : DQ87PG__
Processor(s)  : 1 Processor(s) Installed.
```

Continued on next page

Platform Notes (Continued)

```
     [01]: Intel64 Family 6 Model 60 Stepping 3 GenuineIntel ~3300 Mhz
  BIOS Version  : Intel(R) Corp. PGQ8710H.86A.0036.2013.0702.1908, 7/2/2013
  Total Physical Memory: 3,749 MB

  Trying 'wmic cpu get /value'
  DeviceID      : CPU0
  L2CacheSize   : 512
  L3CacheSize   : 3072
  MaxClockSpeed : 3300
  Name          : Intel(R) Pentium(R) CPU G3430 @ 3.30GHz
  NumberOfCores : 2
  NumberOfLogicalProcessors: 2

  (End of data from sysinfo program)
BIOS: SATA mode set to RAID
Windows Disk Driver: Intel Rapid Storage Technology 12.5.0.1066
Windows Chipset Driver: Intel Chipset Driver 9.4.0.1027
```

Component Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
Micron MT8JTF25664AZ-1G6 Series Memory DIMMs
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc10
```

Base Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DWIN32 -DSPEC_CPU_NO_INTTYPES`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Base Optimization Flags

C benchmarks:
```
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000
```

C++ benchmarks:
```
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F512000000 shlW32M.lib            -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks:
```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:
```
icl -Qvc10
```

Peak Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DWIN32 -DSPEC_CPU_NO_INTTYPES`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2)
`-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch`
`/F512000000 shlW32M.lib            -link /FORCE:MULTIPLE`

401.bzip2: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2)
`-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias`
`/F512000000`

403.gcc: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2)
`-Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000`

Continued on next page

Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmer: Same as 403.gcc

458.sjeng: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 /F512000000

462.libquantum: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

464.h264ref: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-ra-region-strategy=block /F512000000 shlW32M.lib -link /FORCE:MULTIPLE

473.astar: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000 shlW32M.lib -link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Fri Jul 25 00:33:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 July 2014.