



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3650 M4 BD  
(Intel Xeon E5-2603 v2, 1.80 GHz)

**SPECint®2006 = 29.4**

**SPECint\_base2006 = 27.8**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

**Test date:** Jul-2014

**Hardware Availability:** Jan-2014

**Software Availability:** Sep-2013

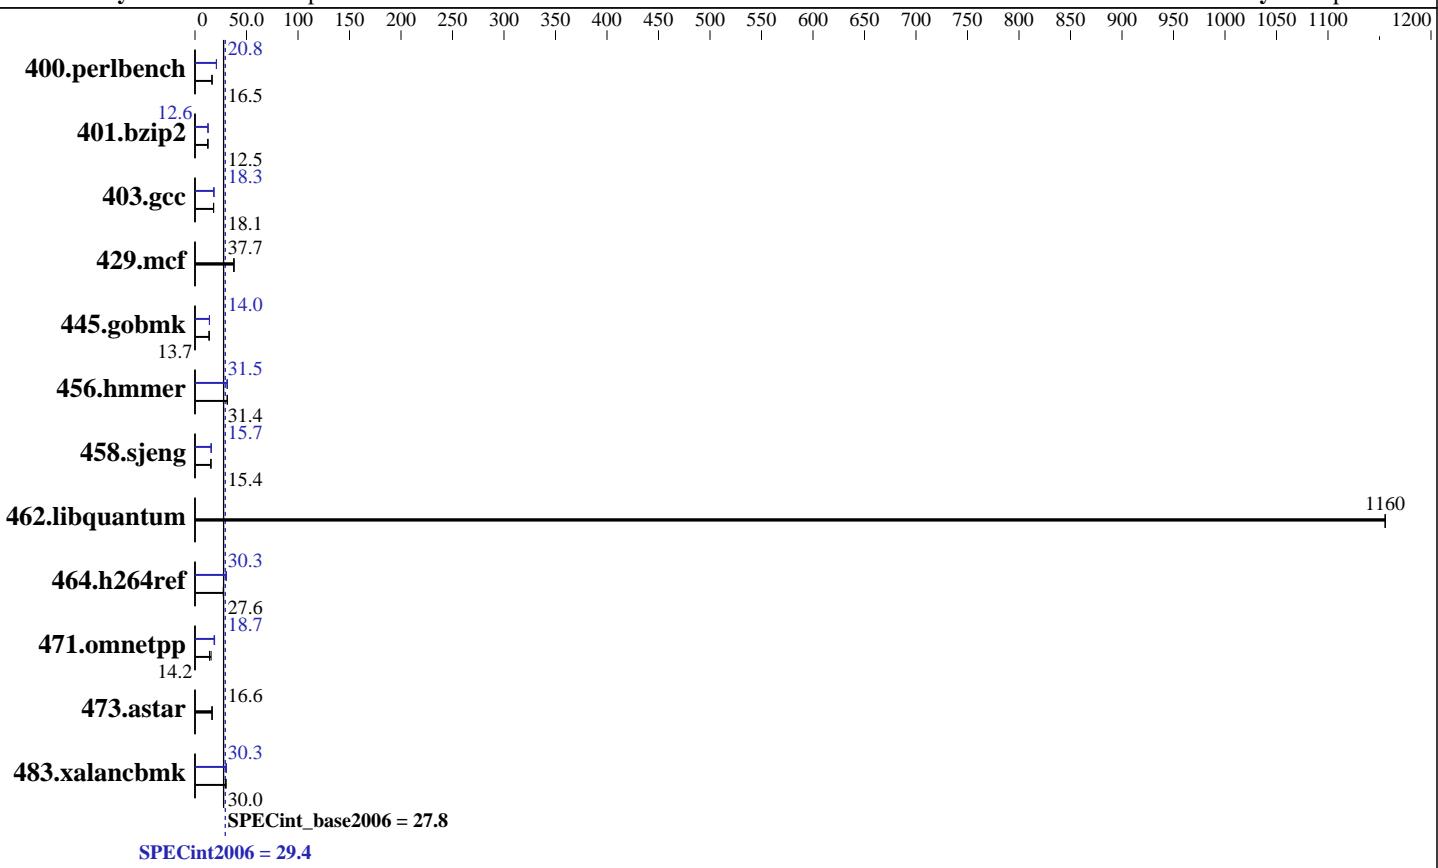

### Hardware

CPU Name:	Intel Xeon E5-2603 v2
CPU Characteristics:	
CPU MHz:	1800
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	10 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1333 MHz)
Disk Subsystem:	1 x 500 GB SATA, 7200 RPM
Other Hardware:	None

### Software

Operating System:	Red Hat Enterprise Linux Server release 6.4 (Santiago) 2.6.32-358.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3650 M4 BD  
(Intel Xeon E5-2603 v2, 1.80 GHz)

**SPECint2006 = 29.4**

**SPECint\_base2006 = 27.8**

CPU2006 license: 11

Test date: Jul-2014

Test sponsor: IBM Corporation

Hardware Availability: Jan-2014

Tested by: IBM Corporation

Software Availability: Sep-2013

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	590	16.5	594	16.5	<b>591</b>	<b>16.5</b>	470	20.8	<b>469</b>	<b>20.8</b>	469	20.8
401.bzip2	<b>772</b>	<b>12.5</b>	773	12.5	771	12.5	<b>763</b>	<b>12.6</b>	<b>764</b>	<b>12.6</b>	764	12.6
403.gcc	<b>446</b>	<b>18.1</b>	445	18.1	448	18.0	439	18.3	<b>439</b>	<b>18.3</b>	439	18.3
429.mcf	<b>242</b>	<b>37.7</b>	243	37.6	240	38.0	<b>242</b>	<b>37.7</b>	243	37.6	240	38.0
445.gobmk	<b>764</b>	<b>13.7</b>	763	13.7	764	13.7	<b>748</b>	<b>14.0</b>	747	14.0	748	14.0
456.hmmer	296	31.5	<b>297</b>	<b>31.4</b>	300	31.1	301	31.0	<b>296</b>	<b>31.5</b>	296	31.5
458.sjeng	784	15.4	<b>784</b>	<b>15.4</b>	784	15.4	769	15.7	<b>770</b>	<b>15.7</b>	<b>769</b>	<b>15.7</b>
462.libquantum	17.9	1160	<b>17.9</b>	<b>1160</b>	17.9	1160	17.9	1160	<b>17.9</b>	<b>1160</b>	17.9	1160
464.h264ref	<b>803</b>	<b>27.6</b>	801	27.6	803	27.6	<b>730</b>	<b>30.3</b>	730	30.3	<b>730</b>	<b>30.3</b>
471.omnetpp	400	15.6	442	14.1	<b>441</b>	<b>14.2</b>	329	19.0	<b>334</b>	<b>18.7</b>	335	18.7
473.astar	<b>423</b>	<b>16.6</b>	426	16.5	423	16.6	<b>423</b>	<b>16.6</b>	426	16.5	423	16.6
483.xalancbmk	<b>230</b>	<b>30.0</b>	229	30.1	234	29.4	<b>227</b>	<b>30.4</b>	228	30.3	<b>228</b>	<b>30.3</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Zone reclaim mode enabled with:

```
echo 1 > /proc/sys/vm/zone_reclaim_mode
```

Intel Idle Driver disabled with the following Linux kernel parameter in /etc/grub.conf:  
intel\_idle.max\_cstate=0

## Platform Notes

BIOS setting:

Operating Mode set to Maximum Performance

Sysinfo program /home/SPECcpu-20140116-ic14.0/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date::: 2012-07-17 #\\$ e86d102572650a6e4d596a3cee98f191

running on x3650M4BD Tue Jul 1 23:25:57 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2603 v2 @ 1.80GHz

2 "physical id"s (chips)

8 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 4

siblings : 4

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3650 M4 BD  
(Intel Xeon E5-2603 v2, 1.80 GHz)

**SPECint2006 = 29.4**

**SPECint\_base2006 = 27.8**

**CPU2006 license:** 11

**Test date:** Jul-2014

**Test sponsor:** IBM Corporation

**Hardware Availability:** Jan-2014

**Tested by:** IBM Corporation

**Software Availability:** Sep-2013

## Platform Notes (Continued)

```
physical 0: cores 0 1 2 3
physical 1: cores 0 1 2 3
cache size : 10240 KB

From /proc/meminfo
MemTotal:      264615288 kB
HugePages_Total:      0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux x3650M4BD 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jul 1 14:03

SPEC is set to: /home/SPECCpu-20140116-ic14.0
Filesystem      Type    Size  Used Avail Use% Mounted on
/dev/mapper/vg_x3650m4bd-lv_home
              ext4    404G   67G  317G  18%  /home

Additional information from dmidecode:
BIOS IBM -[YOE103BUS-1.10]- 02/14/2014
Memory:
 16x Samsung M393B2G70QH0-CMA 16 GB 1333 MHz 2 rank

(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/home/SPECCpu-20140116-ic14.0/lib32:/home/SPECCpu-20140116-ic14.0/lib64:/home/SPECCpu-20140116-ic14.0/sh"

OMP\_NUM\_THREADS = "8"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enable



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3650 M4 BD  
(Intel Xeon E5-2603 v2, 1.80 GHz)

**SPECint2006 = 29.4**

**SPECint\_base2006 = 27.8**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Jul-2014

**Hardware Availability:** Jan-2014

**Software Availability:** Sep-2013

## Base Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

## Base Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

403.gcc: `-DSPEC_CPU_LP64`

429.mcf: `-DSPEC_CPU_LP64`

445.gobmk: `-DSPEC_CPU_LP64`

456.hmmr: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

464.h264ref: `-DSPEC_CPU_LP64`

471.omnetpp: `-DSPEC_CPU_LP64`

473.astar: `-DSPEC_CPU_LP64`

483.xalancbmk: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

## Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32`

`-Wl,-z,muldefs -L/sh -lsmartheap64`

## Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3650 M4 BD  
(Intel Xeon E5-2603 v2, 1.80 GHz)

**SPECint2006 = 29.4**

**SPECint\_base2006 = 27.8**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Jul-2014

**Hardware Availability:** Jan-2014

**Software Availability:** Sep-2013

## Peak Compiler Invocation (Continued)

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

473.astar: `icpc -m64`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

401.bzip2: `-DSPEC_CPU_LP64`

403.gcc: `-DSPEC_CPU_LP64`

429.mcf: `-DSPEC_CPU_LP64`

456.hammer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

473.astar: `-DSPEC_CPU_LP64`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-opt-prefetch -ansi-alias`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32`  
`-opt-prefetch -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc`  
`-opt-malloc-options=3 -auto-ilp32`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`  
`-ansi-alias`

456.hammer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32`  
`-ansi-alias`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3650 M4 BD  
(Intel Xeon E5-2603 v2, 1.80 GHz)

**SPECint2006 = 29.4**

**SPECint\_base2006 = 27.8**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Jul-2014

**Hardware Availability:** Jan-2014

**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-B.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-B.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jul 30 10:53:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 July 2014.