



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3650 M4 BD  
(Intel Xeon E5-2603 v2, 1.80 GHz)

SPECfp®\_rate2006 = 203

SPECfp\_rate\_base2006 = 199

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2014

Hardware Availability: Jan-2014

Software Availability: Sep-2013

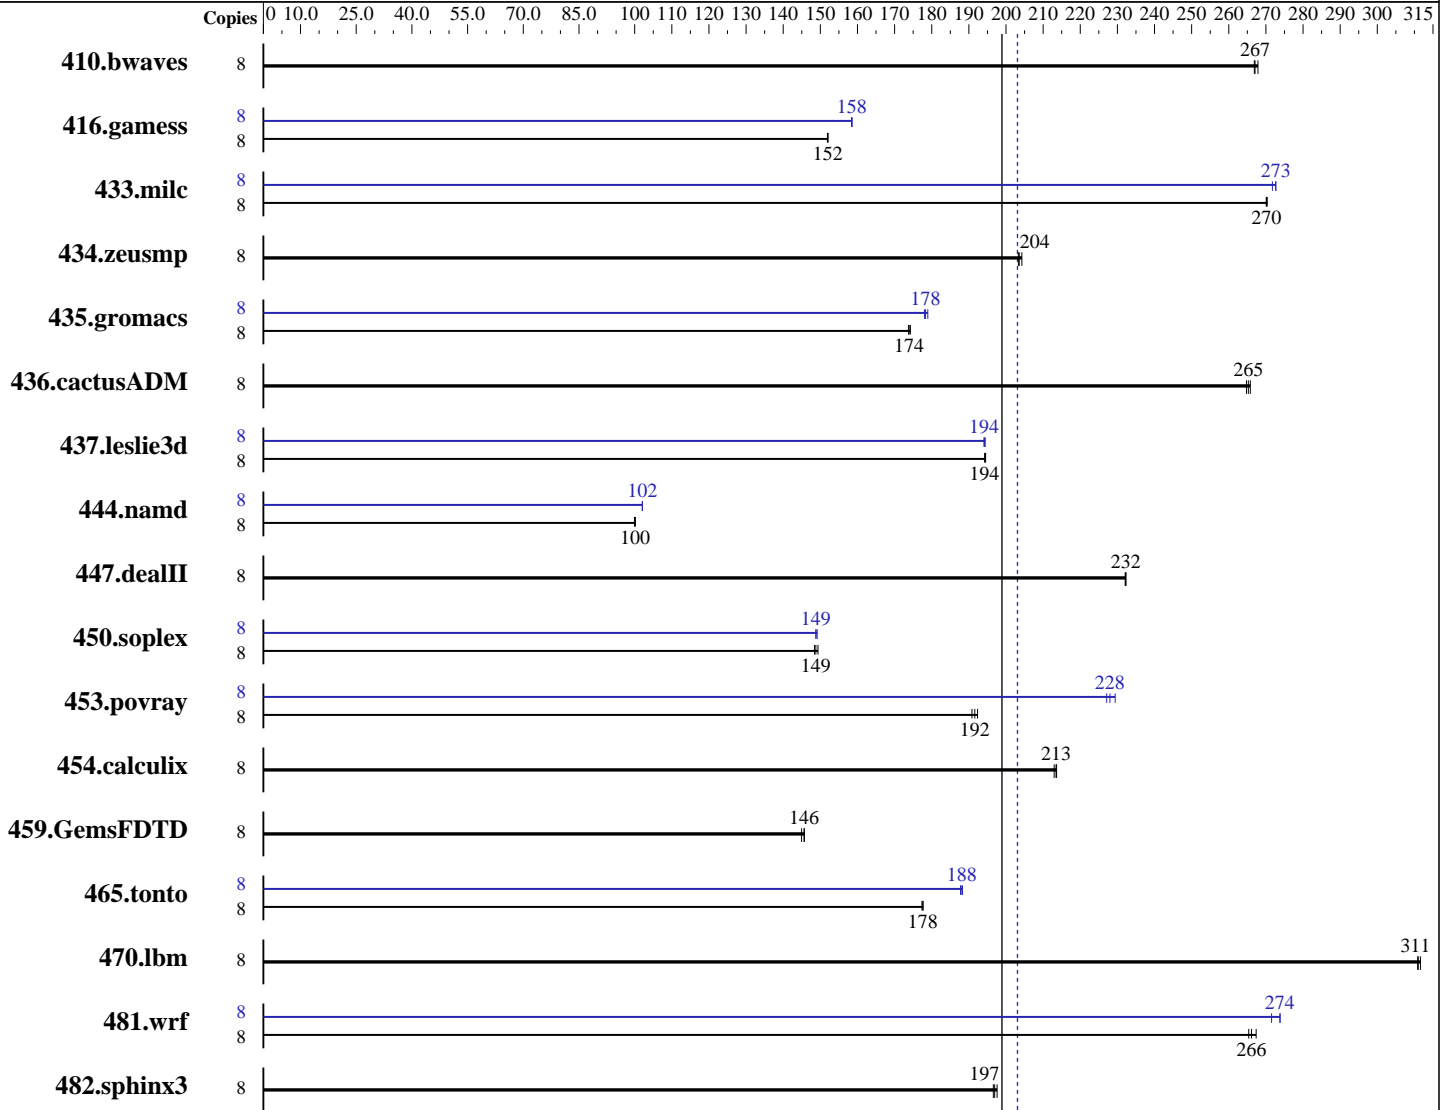

SPECfp\_rate\_base2006 = 199

SPECfp\_rate2006 = 203

### Hardware

CPU Name: Intel Xeon E5-2603 v2  
 CPU Characteristics:  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3650 M4 BD  
(Intel Xeon E5-2603 v2, 1.80 GHz)

SPECfp\_rate2006 = 203

SPECfp\_rate\_base2006 = 199

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Jun-2014  
Hardware Availability: Jan-2014  
Software Availability: Sep-2013

L3 Cache: 10 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1333 MHz)  
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	8	406	268	<b>407</b>	<b>267</b>	407	267	8	406	268	<b>407</b>	<b>267</b>	407	267		
416.gamess	8	1031	152	<b>1030</b>	<b>152</b>	1030	152	8	988	159	<b>989</b>	<b>158</b>	989	158		
433.milc	8	272	270	272	270	<b>272</b>	<b>270</b>	8	<b>269</b>	<b>273</b>	270	272	269	273		
434.zeusmp	8	<b>358</b>	<b>204</b>	356	204	358	203	8	<b>358</b>	<b>204</b>	356	204	358	203		
435.gromacs	8	<b>328</b>	<b>174</b>	328	174	329	174	8	321	178	319	179	<b>320</b>	<b>178</b>		
436.cactusADM	8	<b>360</b>	<b>265</b>	360	266	361	265	8	<b>360</b>	<b>265</b>	360	266	361	265		
437.leslie3d	8	387	194	387	195	<b>387</b>	<b>194</b>	8	387	194	387	194	<b>387</b>	<b>194</b>		
444.namd	8	641	100	642	99.9	<b>641</b>	<b>100</b>	8	628	102	629	102	<b>629</b>	<b>102</b>		
447.dealII	8	394	232	394	232	<b>394</b>	<b>232</b>	8	394	232	394	232	<b>394</b>	<b>232</b>		
450.soplex	8	450	148	<b>448</b>	<b>149</b>	447	149	8	<b>448</b>	<b>149</b>	447	149	448	149		
453.povray	8	<b>222</b>	<b>192</b>	221	192	223	191	8	186	229	<b>187</b>	<b>228</b>	187	227		
454.calculix	8	309	214	310	213	<b>309</b>	<b>213</b>	8	309	214	310	213	<b>309</b>	<b>213</b>		
459.GemsFDTD	8	583	146	<b>583</b>	<b>146</b>	586	145	8	583	146	<b>583</b>	<b>146</b>	586	145		
465.tonto	8	<b>443</b>	<b>178</b>	443	178	444	177	8	<b>418</b>	<b>188</b>	419	188	418	188		
470.lbm	8	<b>353</b>	<b>311</b>	353	312	354	311	8	<b>353</b>	<b>311</b>	353	312	354	311		
481.wrf	8	334	267	337	265	<b>336</b>	<b>266</b>	8	<b>326</b>	<b>274</b>	329	272	326	274		
482.sphinx3	8	789	198	<b>792</b>	<b>197</b>	793	197	8	789	198	<b>792</b>	<b>197</b>	793	197		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Zone reclaim mode enabled with:  
echo 1 > /proc/sys/vm/zone\_reclaim\_mode  
Intel Idle Driver disabled with the following Linux kernel parameter in /etc/grub.conf:  
intel\_idle.max\_cstate=0



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3650 M4 BD  
(Intel Xeon E5-2603 v2, 1.80 GHz)

SPECfp\_rate2006 = 203

SPECfp\_rate\_base2006 = 199

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Jun-2014  
**Hardware Availability:** Jan-2014  
**Software Availability:** Sep-2013

### Platform Notes

BIOS setting:  
Operating Mode set to Maximum Performance  
Sysinfo program /home/SPECcpu-20140116-ic14.0/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on x3650M4BD Fri Jun 27 10:43:09 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2603 v2 @ 1.80GHz
 2 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 4
  siblings     : 4
  physical 0: cores 0 1 2 3
  physical 1: cores 0 1 2 3
cache size     : 10240 KB
```

```
From /proc/meminfo
MemTotal:      264615216 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux x3650M4BD 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 25 17:50
```

```
SPEC is set to: /home/SPECcpu-20140116-ic14.0
Filesystem      Type      Size Used Avail Use% Mounted on
/dev/mapper/vg_x3650m4bd-lv_home
  ext4          404G    67G  317G  18% /home
```

```
Additional information from dmidecode:
BIOS IBM      -[YOE103BUS-1.10]- 02/14/2014
Memory:
 16x Samsung M393B2G70QH0-CMA 16 GB 1333 MHz 2 rank
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECfp\_rate2006 = 203**

IBM System x3650 M4 BD  
(Intel Xeon E5-2603 v2, 1.80 GHz)

**SPECfp\_rate\_base2006 = 199**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Jun-2014  
**Hardware Availability:** Jan-2014  
**Software Availability:** Sep-2013

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/SPECcpu-20140116-ic14.0/libs/32:/home/SPECcpu-20140116-ic14.0/libs/64:/home/SPECcpu-20140116-ic14.0/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3650 M4 BD  
(Intel Xeon E5-2603 v2, 1.80 GHz)

**SPECfp\_rate2006 = 203**

**SPECfp\_rate\_base2006 = 199**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Jun-2014  
**Hardware Availability:** Jan-2014  
**Software Availability:** Sep-2013

## Base Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

Fortran benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks (except as noted below):  
icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECfp\_rate2006 = 203**

IBM System x3650 M4 BD  
(Intel Xeon E5-2603 v2, 1.80 GHz)

**SPECfp\_rate\_base2006 = 199**

**CPU2006 license:** 11

**Test date:** Jun-2014

**Test sponsor:** IBM Corporation

**Hardware Availability:** Jan-2014

**Tested by:** IBM Corporation

**Software Availability:** Sep-2013

## Peak Portability Flags (Continued)

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
 -inline-level=0 -scalar-rep-

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3650 M4 BD  
(Intel Xeon E5-2603 v2, 1.80 GHz)

**SPECfp\_rate2006 = 203**

**SPECfp\_rate\_base2006 = 199**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Jun-2014  
**Hardware Availability:** Jan-2014  
**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-B.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-B.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Jul 30 10:53:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 29 July 2014.