



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Quanta Computer Inc. S400-X44E

**SPECint®2006 = 50.4**  
**SPECint\_base2006 = 47.5**

CPU2006 license: 9050


Test sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test date: Jul-2014

Hardware Availability: Jul-2014

Software Availability: Jul-2014

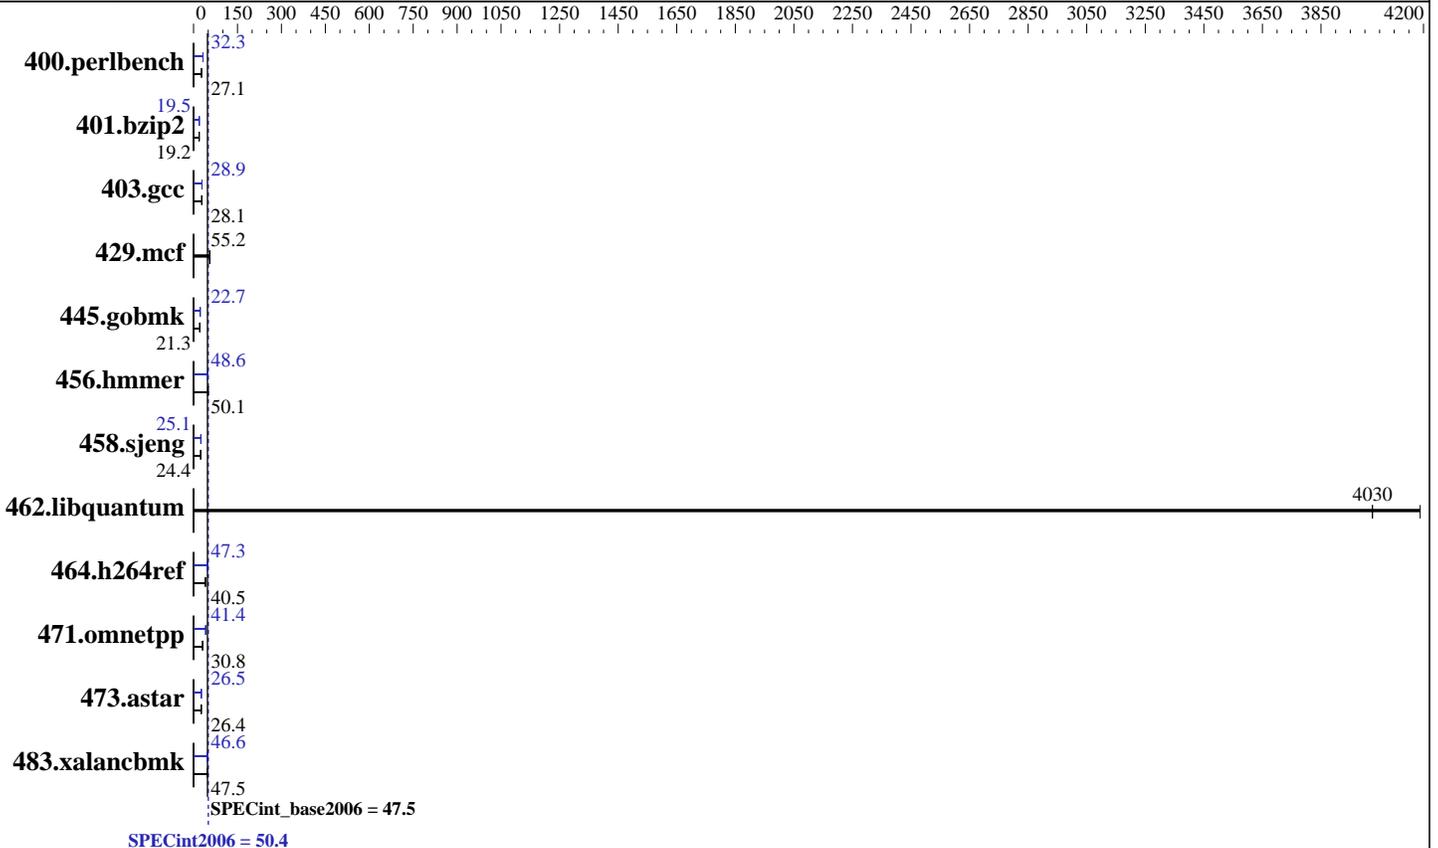

### Hardware

CPU Name: Intel Xeon E5-4657L v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 48 cores, 4 chips, 12 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2,3,4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (32 x 8 GB 1Rx4 PC3-14900R-13, ECC)  
 Disk Subsystem: 690 GB add more disk info here  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi user mode)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Quanta Computer Inc.  
S400-X44E

SPECint2006 = 50.4  
SPECint\_base2006 = 47.5

CPU2006 license: 9050  
Test sponsor: Quanta Computer Inc.  
Tested by: Quanta Computer Inc.

Test date: Jul-2014  
Hardware Availability: Jul-2014  
Software Availability: Jul-2014

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	360	27.1	<b>360</b>	<b>27.1</b>	360	27.2	<b>302</b>	<b>32.3</b>	303	32.2	302	32.3
401.bzip2	<b>502</b>	<b>19.2</b>	502	19.2	502	19.2	495	19.5	<b>495</b>	<b>19.5</b>	495	19.5
403.gcc	286	28.2	<b>286</b>	<b>28.1</b>	287	28.1	279	28.9	<b>279</b>	<b>28.9</b>	279	28.9
429.mcf	164	55.5	167	54.7	<b>165</b>	<b>55.2</b>	164	55.5	167	54.7	<b>165</b>	<b>55.2</b>
445.gobmk	<b>493</b>	<b>21.3</b>	493	21.3	493	21.3	<b>463</b>	<b>22.7</b>	463	22.7	462	22.7
456.hammer	<b>186</b>	<b>50.1</b>	186	50.3	190	49.0	191	48.8	194	48.0	<b>192</b>	<b>48.6</b>
458.sjeng	496	24.4	<b>496</b>	<b>24.4</b>	496	24.4	483	25.1	483	25.1	<b>483</b>	<b>25.1</b>
462.libquantum	4.95	4190	<b>5.15</b>	<b>4030</b>	5.15	4030	4.95	4190	<b>5.15</b>	<b>4030</b>	5.15	4030
464.h264ref	546	40.6	548	40.4	<b>547</b>	<b>40.5</b>	468	47.3	<b>468</b>	<b>47.3</b>	469	47.2
471.omnetpp	<b>203</b>	<b>30.8</b>	203	30.9	203	30.8	152	41.2	<b>151</b>	<b>41.4</b>	150	41.7
473.astar	<b>266</b>	<b>26.4</b>	267	26.3	265	26.5	<b>264</b>	<b>26.5</b>	266	26.4	264	26.6
483.xalancbmk	<b>145</b>	<b>47.5</b>	145	47.5	146	47.4	148	46.5	148	46.6	<b>148</b>	<b>46.6</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /root/speccpu\_linux/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on localhost.localdomain Sun Jul 6 05:42:49 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4657L v2 @ 2.40GHz
4 "physical id"s (chips)
96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 12
siblings : 24
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Quanta Computer Inc.**  
**S400-X44E**

**SPECint2006 = 50.4**  
**SPECint\_base2006 = 47.5**

**CPU2006 license:** 9050

**Test sponsor:** Quanta Computer Inc.

**Tested by:** Quanta Computer Inc.

**Test date:** Jul-2014

**Hardware Availability:** Jul-2014

**Software Availability:** Jul-2014

## Platform Notes (Continued)

```
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 30720 KB
```

```
From /proc/meminfo
MemTotal:      264494508 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54
EST 2013 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 4 15:28
```

```
SPEC is set to: /root/speccpu_linux
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext4  690G   15G  640G   3% /
```

Additional information from dmidecode:

BIOS American Megatrends Inc. S4E\_4A06 06/27/2014

Memory:

```
1x ChannelA_Dimm2_Manufacturer ChannelA_Dimm2_PartNum
1x ChannelB_Dimm2_Manufacturer ChannelB_Dimm2_PartNum
1x ChannelC_Dimm2_Manufacturer ChannelC_Dimm2_PartNum
1x ChannelD_Dimm2_Manufacturer ChannelD_Dimm2_PartNum
1x ChannelE_Dimm2_Manufacturer ChannelE_Dimm2_PartNum
1x ChannelF_Dimm2_Manufacturer ChannelF_Dimm2_PartNum
1x ChannelG_Dimm2_Manufacturer ChannelG_Dimm2_PartNum
1x ChannelH_Dimm2_Manufacturer ChannelH_Dimm2_PartNum
1x ChannelJ_Dimm2_Manufacturer ChannelJ_Dimm2_PartNum
1x ChannelK_Dimm2_Manufacturer ChannelK_Dimm2_PartNum
1x ChannelL_Dimm2_Manufacturer ChannelL_Dimm2_PartNum
1x ChannelM_Dimm2_Manufacturer ChannelM_Dimm2_PartNum
1x ChannelN_Dimm2_Manufacturer ChannelN_Dimm2_PartNum
1x ChannelP_Dimm2_Manufacturer ChannelP_Dimm2_PartNum
1x ChannelR_Dimm2_Manufacturer ChannelR_Dimm2_PartNum
1x ChannelT_Dimm2_Manufacturer ChannelT_Dimm2_PartNum
32x Samsung M393B1G70QH0-CMA 8 GB 1866 MHz 1 rank
```

(End of data from sysinfo program)



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Quanta Computer Inc.  
S400-X44E

SPECint2006 = 50.4  
SPECint\_base2006 = 47.5

CPU2006 license: 9050

Test sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test date: Jul-2014

Hardware Availability: Jul-2014

Software Availability: Jul-2014

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/root/speccpu\_linux/libs/32:/root/speccpu\_linux/libs/64:/root/speccpu\_linux/sh"

OMP\_NUM\_THREADS = "48"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -DSPEC\_CPU\_LP64

429.mcf: -DSPEC\_CPU\_LP64

445.gobmk: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

464.h264ref: -DSPEC\_CPU\_LP64

471.omnetpp: -DSPEC\_CPU\_LP64

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs

-L/sh -lsmartheap64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Quanta Computer Inc.  
S400-X44E

SPECint2006 = 50.4  
SPECint\_base2006 = 47.5

CPU2006 license: 9050

Test sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test date: Jul-2014

Hardware Availability: Jul-2014

Software Availability: Jul-2014

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -DSPEC\_CPU\_LP64

429.mcf: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-ansi-alias

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch  
-ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Quanta Computer Inc.  
S400-X44E

SPECint2006 = 50.4  
SPECint\_base2006 = 47.5

CPU2006 license: 9050

Test sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test date: Jul-2014

Hardware Availability: Jul-2014

Software Availability: Jul-2014

## Peak Optimization Flags (Continued)

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc  
-opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-ansi-alias

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Quanta-Computer-Inc-Platform-Settings-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Quanta-Computer-Inc-Platform-Settings-V1.0.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Quanta Computer Inc.  
S400-X44E

SPECint2006 =	50.4
SPECint_base2006 =	47.5

CPU2006 license: 9050

Test sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test date: Jul-2014

Hardware Availability: Jul-2014

Software Availability: Jul-2014

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Fri Aug 8 10:40:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 8 August 2014.