SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

ASUS H97M-PLUS Motherboard (Intel Pentium G3258)

SPECint®2006 = 45.6

SPECint_base2006 = 43.8

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jul-2014
Hardware Availability: Jun-2014
Software Availability: Oct-2013

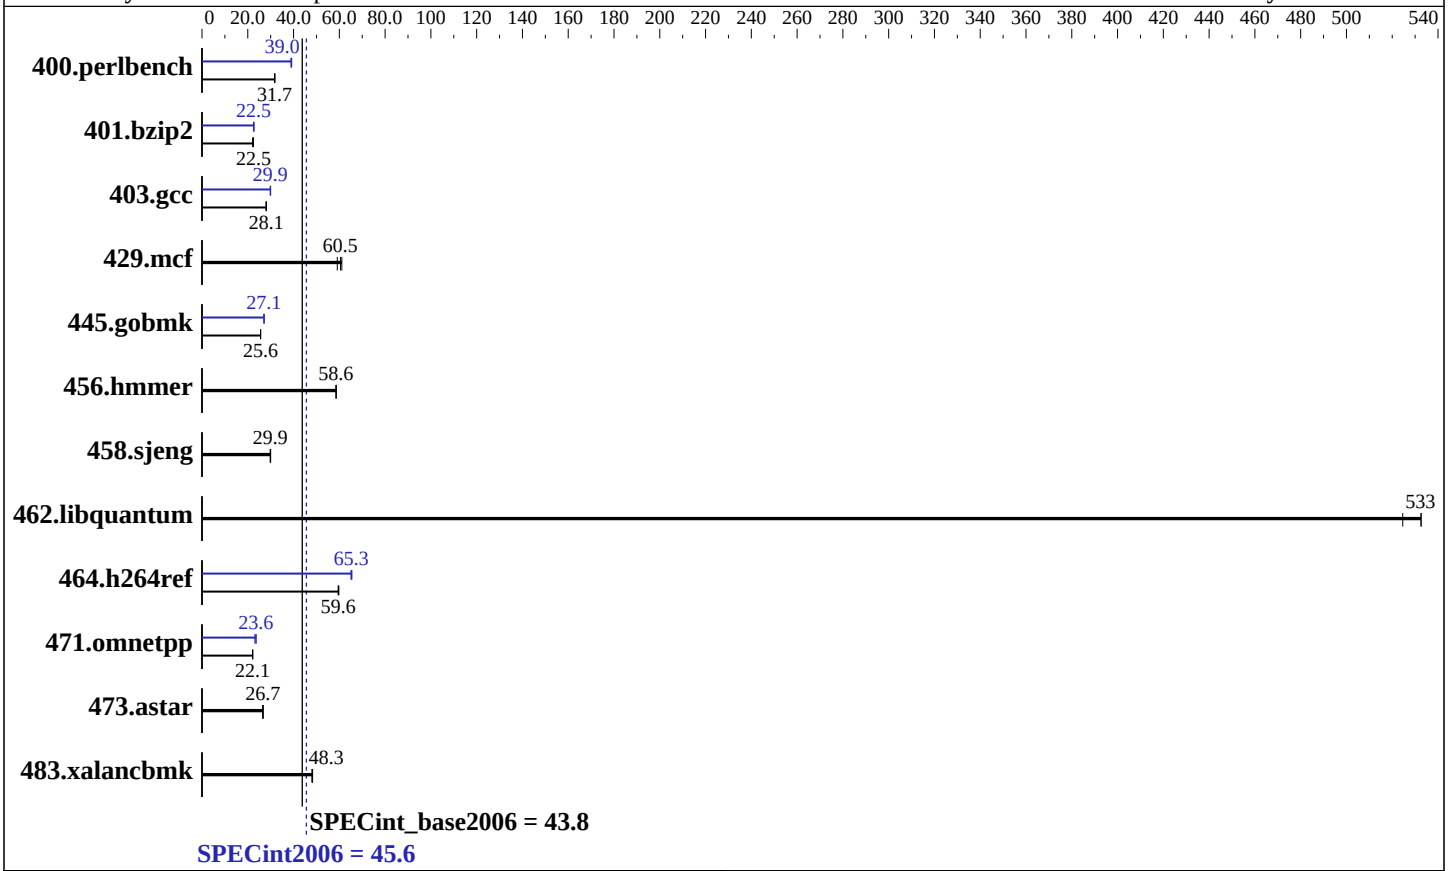

Hardware

CPU Name:	Intel Pentium G3258
CPU Characteristics:	
CPU MHz:	3200
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	3 MB I+D on chip per chip
Other Cache:	None
Memory:	8 GB (2 x 4 GB 2Rx4 PC3-12800U-11, running at 1333 MHz and CL9)
Disk Subsystem:	1 TB Seagate SATA HDD, 7200 RPM
Other Hardware:	None

Software

Operating System:	Microsoft Windows 8.1 Pro 6.3.9600 N/A Build 9600
Compiler:	C/C++: Version 14.0.1.139 of Intel C++ Studio XE for Windows; Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
Auto Parallel:	Yes
File System:	NTFS
System State:	Default
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap Library Version 10.0 from http://www.microquill.com/

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

ASUS H97M-PLUS Motherboard (Intel Pentium G3258)

SPECint2006 = 45.6

SPECint_base2006 = 43.8

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jul-2014
Hardware Availability: Jun-2014
Software Availability: Oct-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	309	31.7	**308**	**31.7**	306	31.9	251	38.9	249	39.2	**251**	**39.0**
401.bzip2	428	22.5	436	22.1	**428**	**22.5**	429	22.5	**428**	**22.5**	423	22.8
403.gcc	**287**	**28.1**	287	28.0	286	28.1	268	30.0	**269**	**29.9**	270	29.8
429.mcf	**151**	**60.5**	149	61.1	154	59.1	**151**	**60.5**	149	61.1	154	59.1
445.gobmk	**410**	**25.6**	410	25.6	410	25.6	387	27.1	**387**	**27.1**	388	27.1
456.hmmer	159	58.6	**159**	**58.6**	159	58.6	159	58.6	**159**	**58.6**	159	58.6
458.sjeng	406	29.8	**405**	**29.9**	404	30.0	406	29.8	**405**	**29.9**	404	30.0
462.libquantum	39.5	525	38.9	533	**38.9**	**533**	39.5	525	38.9	533	**38.9**	**533**
464.h264ref	372	59.5	370	59.8	**371**	**59.6**	**339**	**65.3**	338	65.5	340	65.1
471.omnetpp	282	22.2	**282**	**22.1**	283	22.1	**265**	**23.6**	264	23.6	270	23.1
473.astar	**263**	**26.7**	265	26.5	263	26.7	**263**	**26.7**	265	26.5	263	26.7
483.xalancbmk	143	48.3	**143**	**48.3**	144	48.0	143	48.3	**143**	**48.3**	144	48.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
To compile these binaries, the Intel Compiler 14.0 was set up to
generate 64-bit binaries with the command:
"ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r)
Parallel Studio XE 2013 program folder)
```

Platform Notes

```
Sysinfo program C:\SPEC14.0/Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #$ \8787f7622badcf24e01c368b1db4377c
running on Clt10C37B4DEDF9 Fri Jul 25 16:59:12 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

Trying 'systeminfo'
OS Name       : Microsoft Windows 8.1 Pro
OS Version    : 6.3.9600 N/A Build 9600
System Manufacturer: ASUS
System Model  : All Series
Processor(s)  : 1 Processor(s) Installed.
     [01]: Intel64 Family 6 Model 60 Stepping 3 GenuineIntel ~3201 Mhz
BIOS Version  : American Megatrends Inc. 2001, 6/13/2014
Total Physical Memory: 8,006 MB

Trying 'wmic cpu get /value'
DeviceID      : CPU0
```

Continued on next page

Platform Notes (Continued)

```
L2CacheSize   : 512
L3CacheSize   : 3072
MaxClockSpeed : 3201
Name          : Intel(R) Pentium(R) CPU G3258 @ 3.20GHz
NumberOfCores : 2
NumberOfLogicalProcessors: 2

(End of data from sysinfo program)
```

Component Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
```

General Notes

```
OMP_NUM_THREADS set to number of processors cores
KMP_AFFINITY set to granularity=fine,scatter
Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit
```

Base Compiler Invocation

C benchmarks:
```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:
```
icl -Qvc10
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64_X64 -DSPEC_CPU_NO_NEED_VA_COPY
401.bzip2: -DSPEC_CPU_P64
403.gcc: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64
429.mcf: -DSPEC_CPU_P64
445.gobmk: -DSPEC_CPU_P64
456.hmmer: -DSPEC_CPU_P64
458.sjeng: -DSPEC_CPU_P64
462.libquantum: -DSPEC_CPU_P64
464.h264ref: -DSPEC_CPU_P64 -DWIN32 -DSPEC_CPU_NO_INTTYPES
471.omnetpp: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64
473.astar: -DSPEC_CPU_P64
483.xalancbmk: -DSPEC_CPU_P64 -Qoption,cpp,--no_wchar_t_keyword

Base Optimization Flags

C benchmarks:
```
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel
-Qauto-ilp32 /F512000000
```

C++ benchmarks:
```
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
-Qauto-ilp32 /F512000000 shlW64M.lib            -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks:
```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:
```
icl -Qvc10
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

400.perlbench: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2)
`-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch`
`-Qauto-ilp32 /F512000000 shlW64M.lib`
`-link /FORCE:MULTIPLE`

401.bzip2: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2)
`-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias`
`-Qauto-ilp32 /F512000000`

403.gcc: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2)
`-Qipo -O3 -Qprec-div- -Qauto-ilp32 /F512000000`

Continued on next page

Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O2 -Qprec-div- -Qansi-alias -Qauto-ilp32 /F512000000

456.hmmer: basepeak = yes

458.sjeng: basepeak = yes

462.libquantum: basepeak = yes

464.h264ref: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias -Qauto-ilp32 /F512000000

C++ benchmarks:

471.omnetpp: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-ra-region-strategy=block -Qauto-ilp32 /F512000000 shlW64M.lib -link /FORCE:MULTIPLE

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Sep 9 10:50:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 August 2014.