



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

**SPECint®\_rate2006 = 164**

Express5800/T110g-S (Intel Xeon E3-1240L v3)

**SPECint\_rate\_base2006 = 158**

**CPU2006 license:** 9006


**Test date:** Jul-2014

**Test sponsor:** NEC Corporation

**Hardware Availability:** Jul-2014

**Tested by:** NEC Corporation

**Software Availability:** Jan-2014

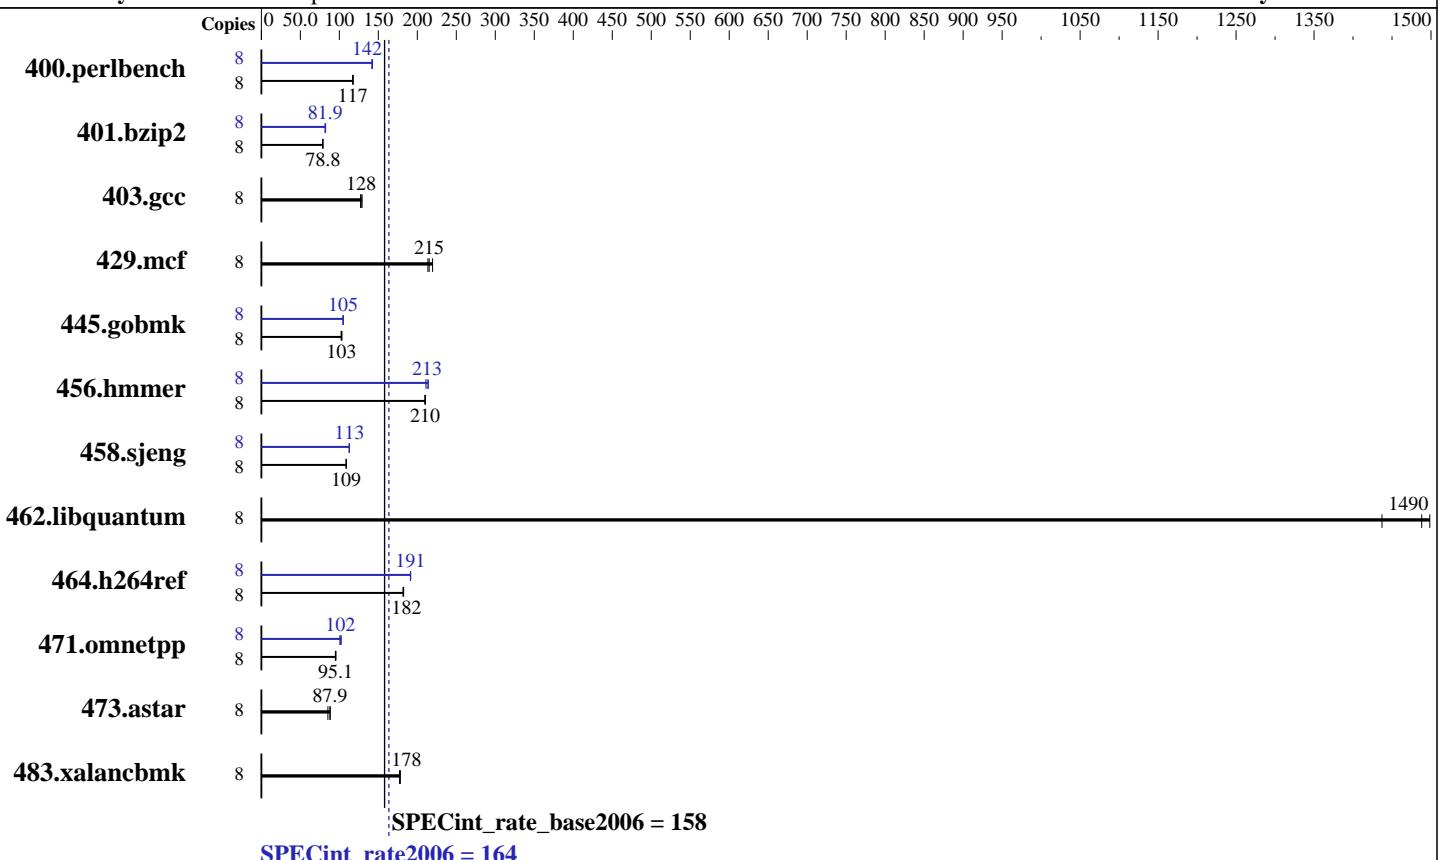

## Hardware

CPU Name:	Intel Xeon E3-1240L v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.00 GHz
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC)
Disk Subsystem:	1 x 250 GB SATA, 7200 RPM
Other Hardware:	None

## Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago)
	Kernel 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 14.0.2.144 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/T110g-S (Intel Xeon E3-1240L v3)

**SPECint\_rate2006 = 164**

**SPECint\_rate\_base2006 = 158**

**CPU2006 license:** 9006

**Test date:** Jul-2014

**Test sponsor:** NEC Corporation

**Hardware Availability:** Jul-2014

**Tested by:** NEC Corporation

**Software Availability:** Jan-2014

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	664	118	668	117	<b>666</b>	<b>117</b>	8	552	142	549	142	<b>550</b>	<b>142</b>
401.bzip2	8	<b>980</b>	<b>78.8</b>	977	79.0	983	78.5	8	<b>943</b>	<b>81.9</b>	937	82.4	<b>945</b>	<b>81.7</b>
403.gcc	8	499	129	<b>503</b>	<b>128</b>	507	127	8	499	129	<b>503</b>	<b>128</b>	507	127
429.mcf	8	332	220	<b>339</b>	<b>215</b>	342	214	8	332	220	<b>339</b>	<b>215</b>	342	214
445.gobmk	8	<b>815</b>	<b>103</b>	813	103	821	102	8	<b>801</b>	<b>105</b>	798	105	802	105
456.hammer	8	355	210	<b>356</b>	<b>210</b>	356	210	8	349	214	<b>351</b>	<b>213</b>	354	211
458.sjeng	8	892	109	<b>889</b>	<b>109</b>	888	109	8	857	113	860	113	<b>858</b>	<b>113</b>
462.libquantum	8	111	1500	115	1440	<b>111</b>	<b>1490</b>	8	111	1500	115	1440	<b>111</b>	<b>1490</b>
464.h264ref	8	970	182	<b>973</b>	<b>182</b>	974	182	8	926	191	924	192	<b>926</b>	<b>191</b>
471.omnetpp	8	527	94.9	523	95.7	<b>526</b>	<b>95.1</b>	8	488	102	<b>492</b>	<b>102</b>	497	101
473.astar	8	636	88.3	<b>639</b>	<b>87.9</b>	658	85.3	8	636	88.3	<b>639</b>	<b>87.9</b>	658	85.3
483.xalancbmk	8	311	177	310	178	<b>310</b>	<b>178</b>	8	311	177	310	178	<b>310</b>	<b>178</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:

Energy Performance: Performance

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1 > /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T110g-S (Intel Xeon E3-1240L v3)

**SPECint\_rate2006 = 164**

**SPECint\_rate\_base2006 = 158**

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2014

Hardware Availability: Jul-2014

Software Availability: Jan-2014

## Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T110g-S (Intel Xeon E3-1240L v3)

SPECint\_rate2006 = 164

SPECint\_rate\_base2006 = 158

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2014

Hardware Availability: Jul-2014

Software Availability: Jan-2014

## Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32  
401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
403.gcc: basepeak = yes  
429.mcf: basepeak = yes  
445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3  
456.hmmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32  
458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32  
462.libquantum: basepeak = yes  
464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias

C++ benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T110g-S (Intel Xeon E3-1240L v3)

**SPECint\_rate2006 = 164**

**SPECint\_rate\_base2006 = 158**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Jul-2014

**Hardware Availability:** Jul-2014

**Software Availability:** Jan-2014

## Peak Optimization Flags (Continued)

```
471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/sh -lsmartheap
```

```
473.astar: basepeak = yes
```

```
483.xalancbmk: basepeak = yes
```

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Aug 26 18:10:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 26 August 2014.