



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

**SPECfp®2006 = 77.2**

Express5800/T110g-S (Intel Xeon E3-1271 v3)

**SPECfp\_base2006 = 75.6**

CPU2006 license: 9006


Test date: May-2014

Test sponsor: NEC Corporation

Hardware Availability: Jul-2014

Tested by: NEC Corporation

Software Availability: Jan-2014

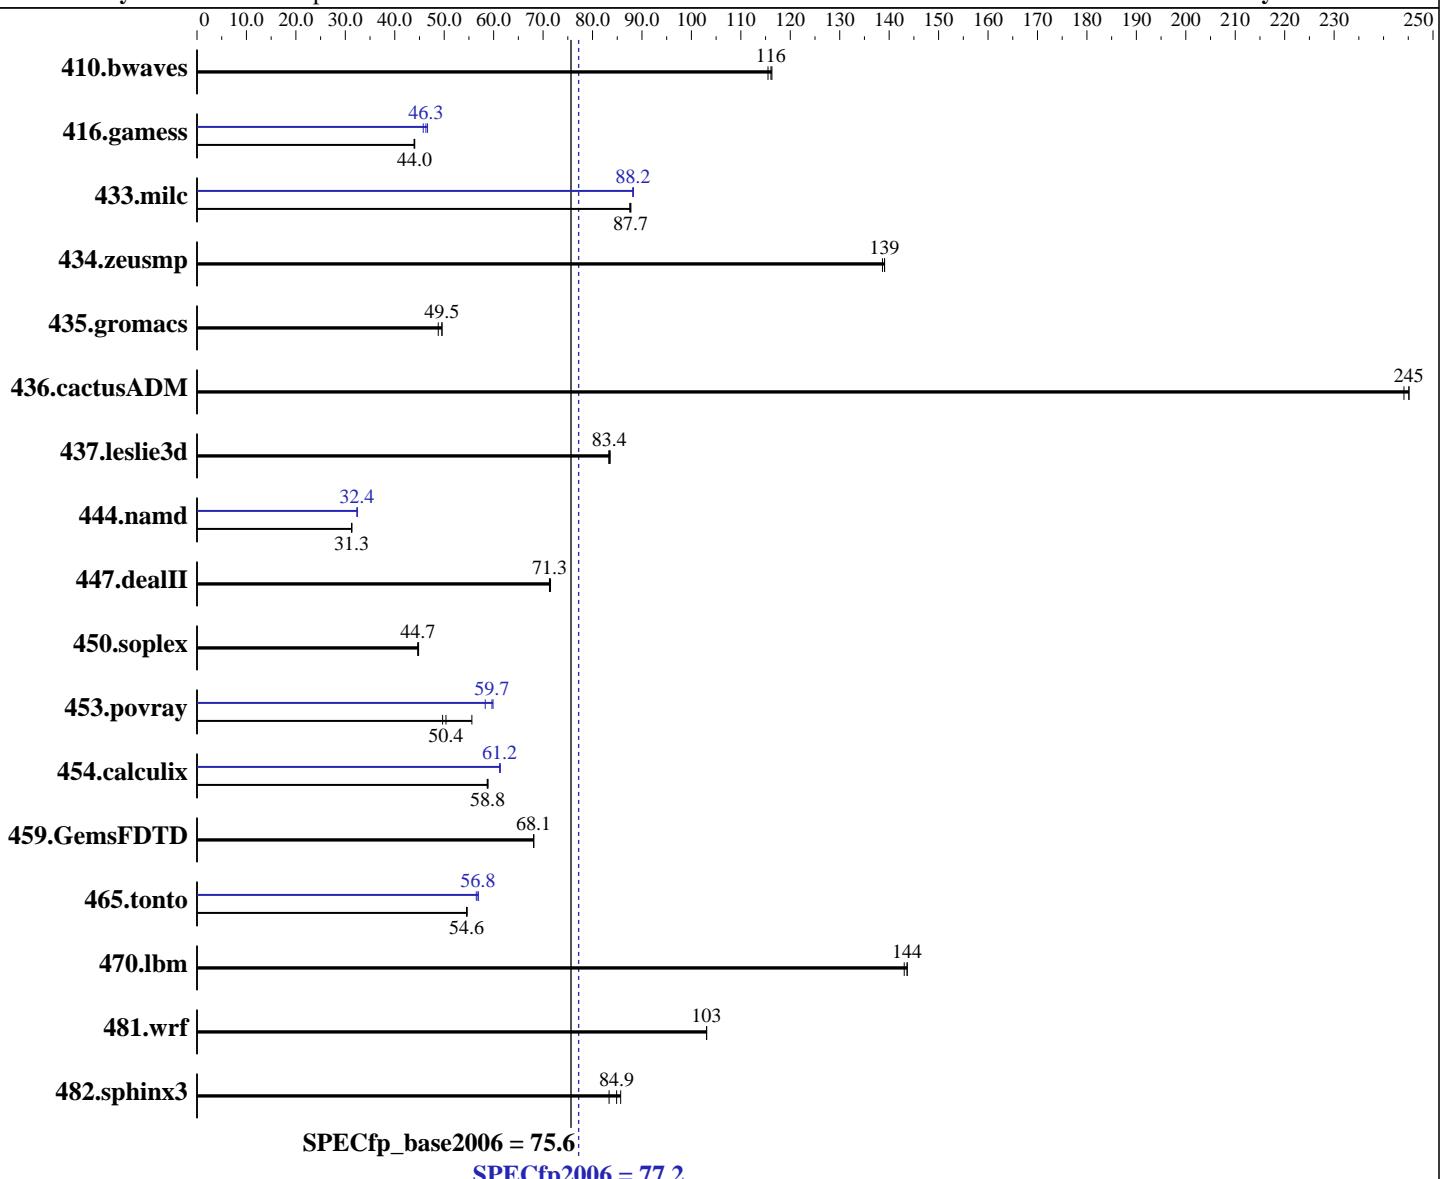

## Hardware

CPU Name: Intel Xeon E3-1271 v3  
CPU Characteristics: Intel Turbo Boost Technology up to 4.00 GHz  
CPU MHz: 3600  
FPU: Integrated  
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
CPU(s) orderable: 1 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
Compiler: Kernel 2.6.32-431.el6.x86\_64  
C/C++: Version 14.0.2.144 of Intel C++ Studio XE for Linux;  
Fortran: Version 14.0.2.144 of Intel Fortran Studio XE for Linux  
Auto Parallel: Yes  
File System: ext4

*Continued on next page*

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/T110g-S (Intel Xeon E3-1271 v3)

**SPECfp2006 = 77.2**

CPU2006 license: 9006

Test date: May-2014

Test sponsor: NEC Corporation

Hardware Availability: Jul-2014

Tested by: NEC Corporation

Software Availability: Jan-2014

L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC)  
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	118	115	<b>117</b>	<b>116</b>	117	116	118	115	<b>117</b>	<b>116</b>	117	116
416.gamess	446	43.9	<b>445</b>	<b>44.0</b>	445	44.0	<b>423</b>	<b>46.3</b>	428	45.8	420	46.6
433.milc	105	87.7	105	87.5	<b>105</b>	<b>87.7</b>	104	88.1	<b>104</b>	<b>88.2</b>	104	88.3
434.zeusmp	65.4	139	<b>65.4</b>	<b>139</b>	65.6	139	65.4	139	<b>65.4</b>	<b>139</b>	65.6	139
435.gromacs	<b>144</b>	<b>49.5</b>	146	48.8	144	49.5	<b>144</b>	<b>49.5</b>	146	48.8	144	49.5
436.cactusADM	48.7	245	<b>48.7</b>	<b>245</b>	49.0	244	<b>48.7</b>	<b>245</b>	<b>48.7</b>	<b>245</b>	49.0	244
437.leslie3d	113	83.3	112	83.6	<b>113</b>	<b>83.4</b>	113	83.3	112	83.6	<b>113</b>	<b>83.4</b>
444.namd	<b>256</b>	<b>31.3</b>	256	31.3	256	31.3	248	32.4	<b>248</b>	<b>32.4</b>	248	32.4
447.dealII	<b>160</b>	<b>71.3</b>	160	71.3	160	71.5	<b>160</b>	<b>71.3</b>	160	71.3	160	71.5
450.soplex	<b>187</b>	<b>44.7</b>	186	44.8	187	44.7	<b>187</b>	<b>44.7</b>	186	44.8	187	44.7
453.povray	107	49.7	<b>106</b>	<b>50.4</b>	95.7	55.6	<b>89.2</b>	<b>59.7</b>	88.8	59.9	91.3	58.3
454.calculix	140	58.9	141	58.7	<b>140</b>	<b>58.8</b>	134	61.3	135	61.2	<b>135</b>	<b>61.2</b>
459.GemsFDTD	156	68.1	156	68.1	<b>156</b>	<b>68.1</b>	156	68.1	156	68.1	<b>156</b>	<b>68.1</b>
465.tonto	180	54.6	<b>180</b>	<b>54.6</b>	181	54.5	174	56.5	<b>173</b>	<b>56.8</b>	173	56.9
470.lbm	96.1	143	95.7	144	<b>95.7</b>	<b>144</b>	96.1	143	95.7	144	<b>95.7</b>	<b>144</b>
481.wrf	<b>108</b>	<b>103</b>	108	103	108	103	<b>108</b>	<b>103</b>	108	103	108	103
482.sphinx3	<b>230</b>	<b>84.9</b>	227	85.7	234	83.4	<b>230</b>	<b>84.9</b>	227	85.7	234	83.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:

Energy Performance: Performance

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP\_NUM\_THREADS = "4"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/T110g-S (Intel Xeon E3-1271 v3)

**SPECfp2006 =**

**77.2**

**SPECfp\_base2006 =**

**75.6**

**CPU2006 license:** 9006

**Test date:**

May-2014

**Test sponsor:** NEC Corporation

**Hardware Availability:**

Jul-2014

**Tested by:** NEC Corporation

**Software Availability:**

Jan-2014

## General Notes (Continued)

Added glibc-static-2.12-1.132.el6.x86\_64.rpm  
to enable static linking

Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
  437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
  447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
      481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/T110g-S (Intel Xeon E3-1271 v3)

**SPECfp2006 =**

**77.2**

**SPECfp\_base2006 =**

**75.6**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:**

May-2014

**Hardware Availability:** Jul-2014

**Software Availability:** Jan-2014

## Base Optimization Flags (Continued)

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static  
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T110g-S (Intel Xeon E3-1271 v3)

**SPECfp2006 =**

**77.2**

**SPECfp\_base2006 =**

**75.6**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:**

May-2014

**Hardware Availability:**

Jul-2014

**Software Availability:**

Jan-2014

## Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T110g-S (Intel Xeon E3-1271 v3)

**SPECfp2006 =** 77.2

**SPECfp\_base2006 =** 75.6

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** May-2014

**Hardware Availability:** Jul-2014

**Software Availability:** Jan-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Aug 26 18:10:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 26 August 2014.