SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T110g-S (Intel Xeon E3-1275L v3)

SPECfp®2006 = 73.3

SPECfp_base2006 = 70.6

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: May-2014
Hardware Availability: Jul-2014
Software Availability: Jan-2014

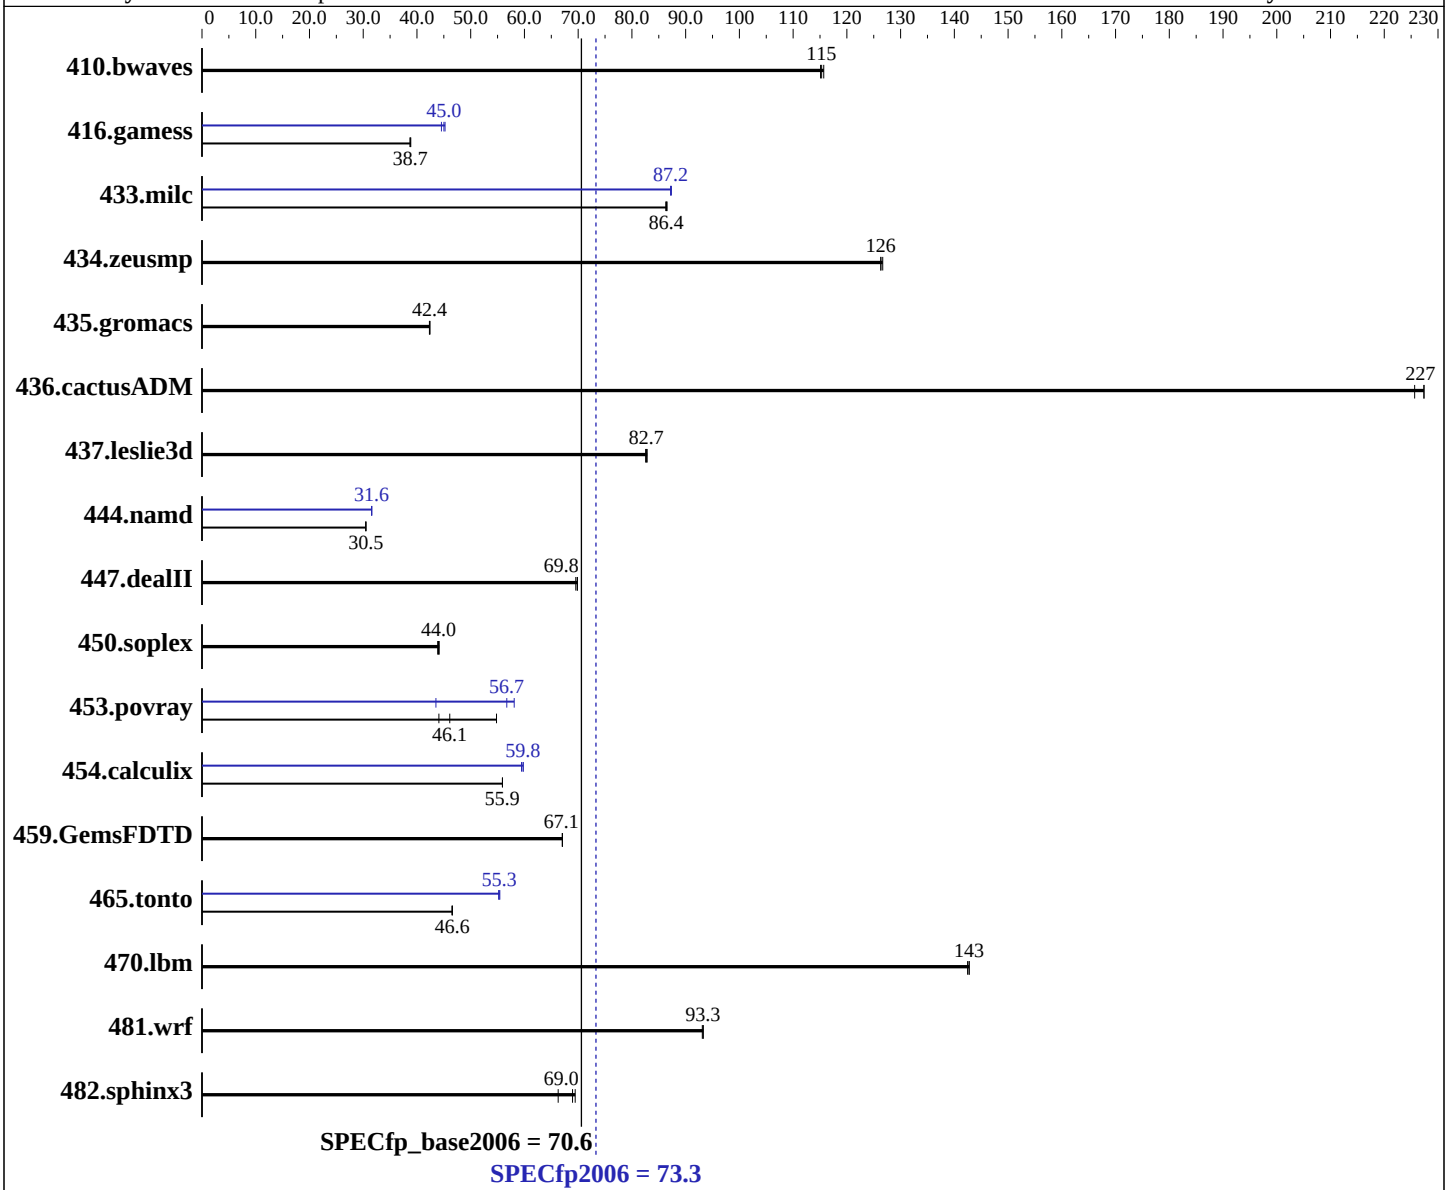

Hardware

CPU Name:	Intel Xeon E3-1275L v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.90 GHz
CPU MHz:	2700
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) Kernel 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 14.0.2.144 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.2.144 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T110g-S (Intel Xeon E3-1275L v3)

SPECfp2006 = 73.3

SPECfp_base2006 = 70.6

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: May-2014
Hardware Availability: Jul-2014
Software Availability: Jan-2014

L3 Cache:	8 MB I+D on chip per chip	System State:	Run level 3 (multi-user)
Other Cache:	None	Base Pointers:	64-bit
Memory:	16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC)	Peak Pointers:	32/64-bit
Disk Subsystem:	1 x 250 GB SATA, 7200 RPM	Other Software:	None
Other Hardware:	None		

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	117	116	**118**	**115**	118	115	117	116	**118**	**115**	118	115
416.gamess	**505**	**38.7**	504	38.9	506	38.7	439	44.6	**435**	**45.0**	433	45.2
433.milc	106	86.5	106	86.3	**106**	**86.4**	**105**	**87.2**	105	87.4	105	87.2
434.zeusmp	71.8	127	**72.0**	**126**	72.0	126	71.8	127	**72.0**	**126**	72.0	126
435.gromacs	168	42.4	**169**	**42.4**	169	42.3	168	42.4	**169**	**42.4**	169	42.3
436.cactusADM	52.6	227	**52.6**	**227**	53.0	226	52.6	227	**52.6**	**227**	53.0	226
437.leslie3d	**114**	**82.7**	113	82.8	114	82.6	**114**	**82.7**	113	82.8	114	82.6
444.namd	263	30.5	263	30.5	**263**	**30.5**	**254**	**31.6**	254	31.6	254	31.6
447.dealII	164	69.6	**164**	**69.8**	164	69.9	164	69.6	**164**	**69.8**	164	69.9
450.soplex	**189**	**44.0**	189	44.1	190	43.9	**189**	**44.0**	189	44.1	190	43.9
453.povray	121	44.1	**115**	**46.1**	97.1	54.8	**93.8**	**56.7**	122	43.5	91.6	58.1
454.calculix	148	55.9	148	55.9	**148**	**55.9**	138	59.8	**138**	**59.8**	139	59.5
459.GemsFDTD	158	67.1	**158**	**67.1**	158	67.1	158	67.1	**158**	**67.1**	158	67.1
465.tonto	211	46.6	212	46.5	**211**	**46.6**	**178**	**55.3**	178	55.4	178	55.2
470.lbm	96.4	142	96.2	143	**96.3**	**143**	96.4	142	96.2	143	**96.3**	**143**
481.wrf	**120**	**93.3**	120	93.3	120	93.1	**120**	**93.3**	120	93.3	120	93.1
482.sphinx3	294	66.3	281	69.4	**283**	**69.0**	294	66.3	281	69.4	**283**	**69.0**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
 Energy Performance: Performance
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"
OMP_NUM_THREADS = "4"
```

Continued on next page

General Notes (Continued)

```
Added glibc-static-2.12-1.132.el6.x86_64.rpm
to enable static linking
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias
```

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias`

Fortran benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch -ansi-alias`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-static -auto-ilp32 -ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

444.namd: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-fno-alias -auto-ilp32`

Continued on next page

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Aug 26 18:10:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 August 2014.