



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 220 X5 (Intel Xeon E5-2640 v2, 2.00 GHz)

**SPECint\_rate2006 = 541**

**SPECint\_rate\_base2006 = 522**

CPU2006 license: 9008


**Test date:** Jan-2005

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Oct-2013

**Tested by:** ACTION S.A.

**Software Availability:** Sep-2013

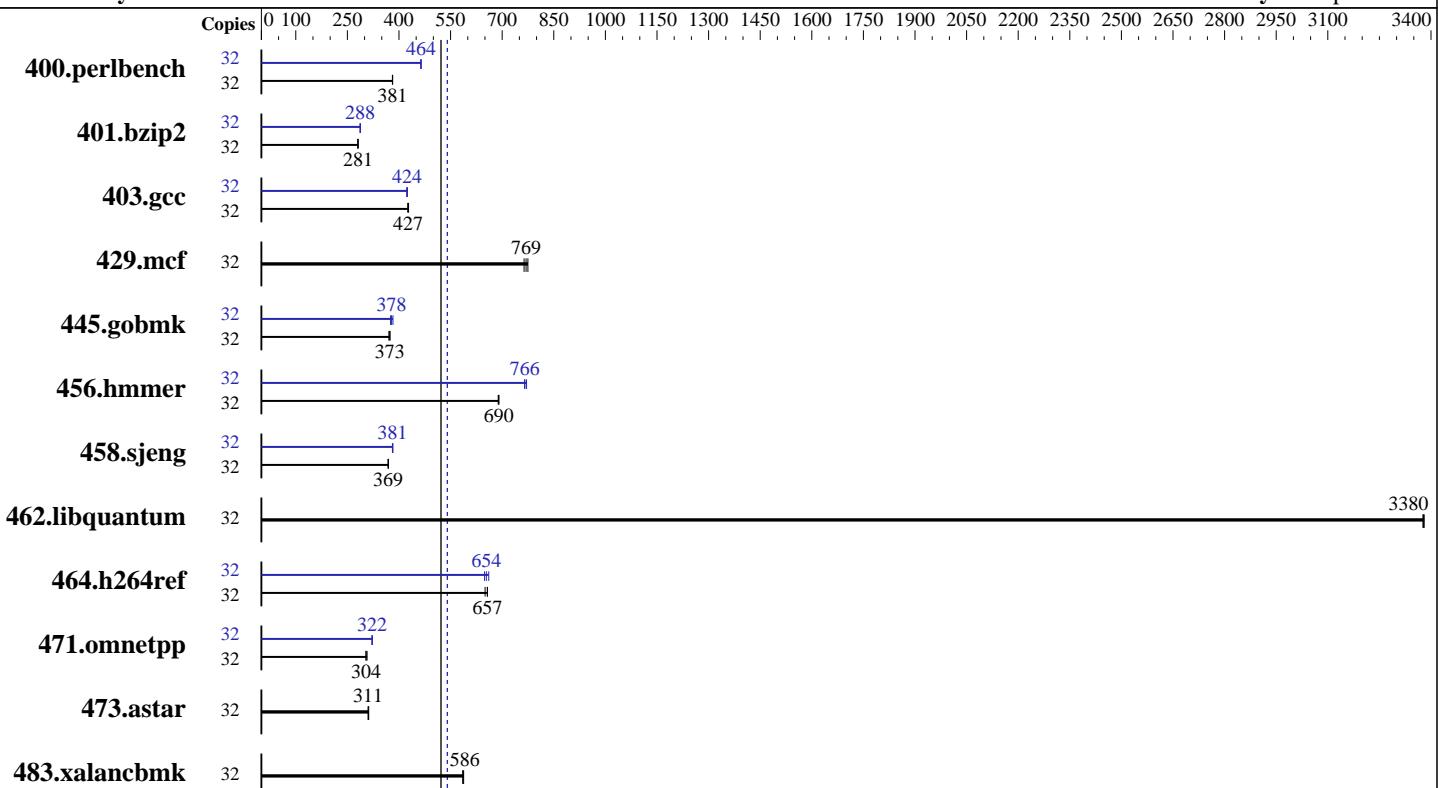

**SPECint\_rate\_base2006 = 522**

**SPECint\_rate2006 = 541**

### Hardware

CPU Name:	Intel Xeon E5-2640 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 2.50 GHz
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	20 MB I+D on chip per chip
Other Cache:	None
Memory:	128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC, running at 1600 MHz and CL11)
Disk Subsystem:	1 x 240 GB SATA II SSD
Other Hardware:	None

### Software

Operating System:	Red Hat Enterprise Linux Server release 6.4 (Santiago) 2.6.32-358.11.1.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

<b>ACTION S.A.</b>	<b>SPECint_rate2006 =</b>	<b>541</b>
ACTINA SOLAR 220 X5 (Intel Xeon E5-2640 v2, 2.00 GHz)	<b>SPECint_rate_base2006 =</b>	<b>522</b>

CPU2006 license: 9008

Test date: Jan-2005

Test sponsor: ACTION S.A.

Hardware Availability: Oct-2013

Tested by: ACTION S.A.

Software Availability: Sep-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	<b>820</b>	<b>381</b>	819	382	821	381	32	674	464	674	464	<b>674</b>	<b>464</b>
401.bzip2	32	1098	281	<b>1099</b>	<b>281</b>	1103	280	32	1077	287	1073	288	<b>1074</b>	<b>288</b>
403.gcc	32	605	426	602	428	<b>604</b>	<b>427</b>	32	607	425	<b>608</b>	<b>424</b>	610	423
429.mcf	32	377	775	382	764	<b>379</b>	<b>769</b>	32	377	775	382	764	<b>379</b>	<b>769</b>
445.gobmk	32	<b>900</b>	<b>373</b>	906	371	898	374	32	878	382	894	375	<b>887</b>	<b>378</b>
456.hmmer	32	<b>433</b>	<b>690</b>	434	688	433	690	32	390	765	<b>390</b>	<b>766</b>	387	771
458.sjeng	32	1050	369	<b>1050</b>	<b>369</b>	1048	369	32	<b>1016</b>	<b>381</b>	1016	381	1012	383
462.libquantum	32	196	3380	<b>196</b>	<b>3380</b>	196	3380	32	196	3380	<b>196</b>	<b>3380</b>	196	3380
464.h264ref	32	1078	657	1089	650	<b>1078</b>	<b>657</b>	32	1092	649	<b>1083</b>	<b>654</b>	1071	661
471.omnetpp	32	<b>657</b>	<b>304</b>	657	304	651	307	32	622	322	620	322	<b>621</b>	<b>322</b>
473.astar	32	724	310	720	312	<b>723</b>	<b>311</b>	32	724	310	720	312	<b>723</b>	<b>311</b>
483.xalancbmk	32	377	586	<b>377</b>	<b>586</b>	376	588	32	377	586	<b>377</b>	<b>586</b>	376	588

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

### Bios Settings:

System Acoustic and Performance Configuration = Performance

Select Memory RAS Configuration = Maximum Performance

Intel(R) Turbo Boost Technology = Enabled

Processor C3 = Disabled

Processor C6 = Disabled

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date::: 2012-07-17 #\\$ e86d102572650a6e4d596a3cee98f191  
running on localhost.localdomain Sat Jan 1 03:35:47 2005

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 220 X5 (Intel Xeon E5-2640 v2, 2.00 GHz)

**SPECint\_rate2006 = 541**

**SPECint\_rate\_base2006 = 522**

CPU2006 license: 9008

Test date: Jan-2005

Test sponsor: ACTION S.A.

Hardware Availability: Oct-2013

Tested by: ACTION S.A.

Software Availability: Sep-2013

## Platform Notes (Continued)

```
model name : Intel(R) Xeon(R) CPU E5-2640 v2 @ 2.00GHz
  2 "physical id"s (chips)
    32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings   : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

From /proc/meminfo
MemTotal:      132053000 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux localhost.localdomain 2.6.32-358.11.1.el6.x86_64 #1 SMP Tue Nov 19
17:43:04 CET 2013 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jan 1 03:35

SPEC is set to: /cpu2006.1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda1        ext4  193G   51G  133G  28%  /

Additional information from dmidecode:
BIOS Intel Corp. SE5C600.86B.02.03.0003.041920141333 04/19/2014
Memory:
 16x 8 GB
 16x Hynix HMT31GR7EFR4C-RD 8 GB 1867 MHz 2 rank

(End of data from sysinfo program)
dmidecode does not properly detect memory modules
16 modules of 8 GB were used to run the test (128 GB total)
memory modules operate at speed 1600 MHz while dmidecode shows 1867 MHz
```

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	<b>SPECint_rate2006 =</b>	<b>541</b>
ACTINA SOLAR 220 X5 (Intel Xeon E5-2640 v2, 2.00 GHz)	<b>SPECint_rate_base2006 =</b>	<b>522</b>
CPU2006 license: 9008	Test date:	Jan-2005
Test sponsor: ACTION S.A.	Hardware Availability:	Oct-2013
Tested by: ACTION S.A.	Software Availability:	Sep-2013

## General Notes (Continued)

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enable
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Binaries compiled on a system with 2x Xeon E5-2650 v2 chips + 256 GB memory using RedHat EL 6.4

## Base Compiler Invocation

C benchmarks:

```
icc -m32
```

C++ benchmarks:

```
icpc -m32
```

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/cpu2006.1.2/sh -lsmartheap
```

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 220 X5 (Intel Xeon E5-2640 v2, 2.00 GHz)

**SPECint\_rate2006 = 541**

**SPECint\_rate\_base2006 = 522**

CPU2006 license: 9008

Test date: Jan-2005

Test sponsor: ACTION S.A.

Hardware Availability: Oct-2013

Tested by: ACTION S.A.

Software Availability: Sep-2013

## Peak Compiler Invocation (Continued)

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	<b>SPECint_rate2006 =</b>	<b>541</b>
ACTINA SOLAR 220 X5 (Intel Xeon E5-2640 v2, 2.00 GHz)	<b>SPECint_rate_base2006 =</b>	<b>522</b>
<b>CPU2006 license:</b> 9008	<b>Test date:</b>	Jan-2005
<b>Test sponsor:</b> ACTION S.A.	<b>Hardware Availability:</b>	Oct-2013
<b>Tested by:</b> ACTION S.A.	<b>Software Availability:</b>	Sep-2013

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

```
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -unroll2 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
              -L/cpu2006.1.2/sh -lsmartheap
```

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-apr-2014-For-Intel-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-apr-2014-For-Intel-Platform.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Aug 26 18:11:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 26 August 2014.