SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei CH140 (Intel Xeon E5-2690 v2)

SPECfp®2006 = 106

SPECfp_base2006 = 102

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Jul-2014
Hardware Availability: Sep-2013
Software Availability: Nov-2013

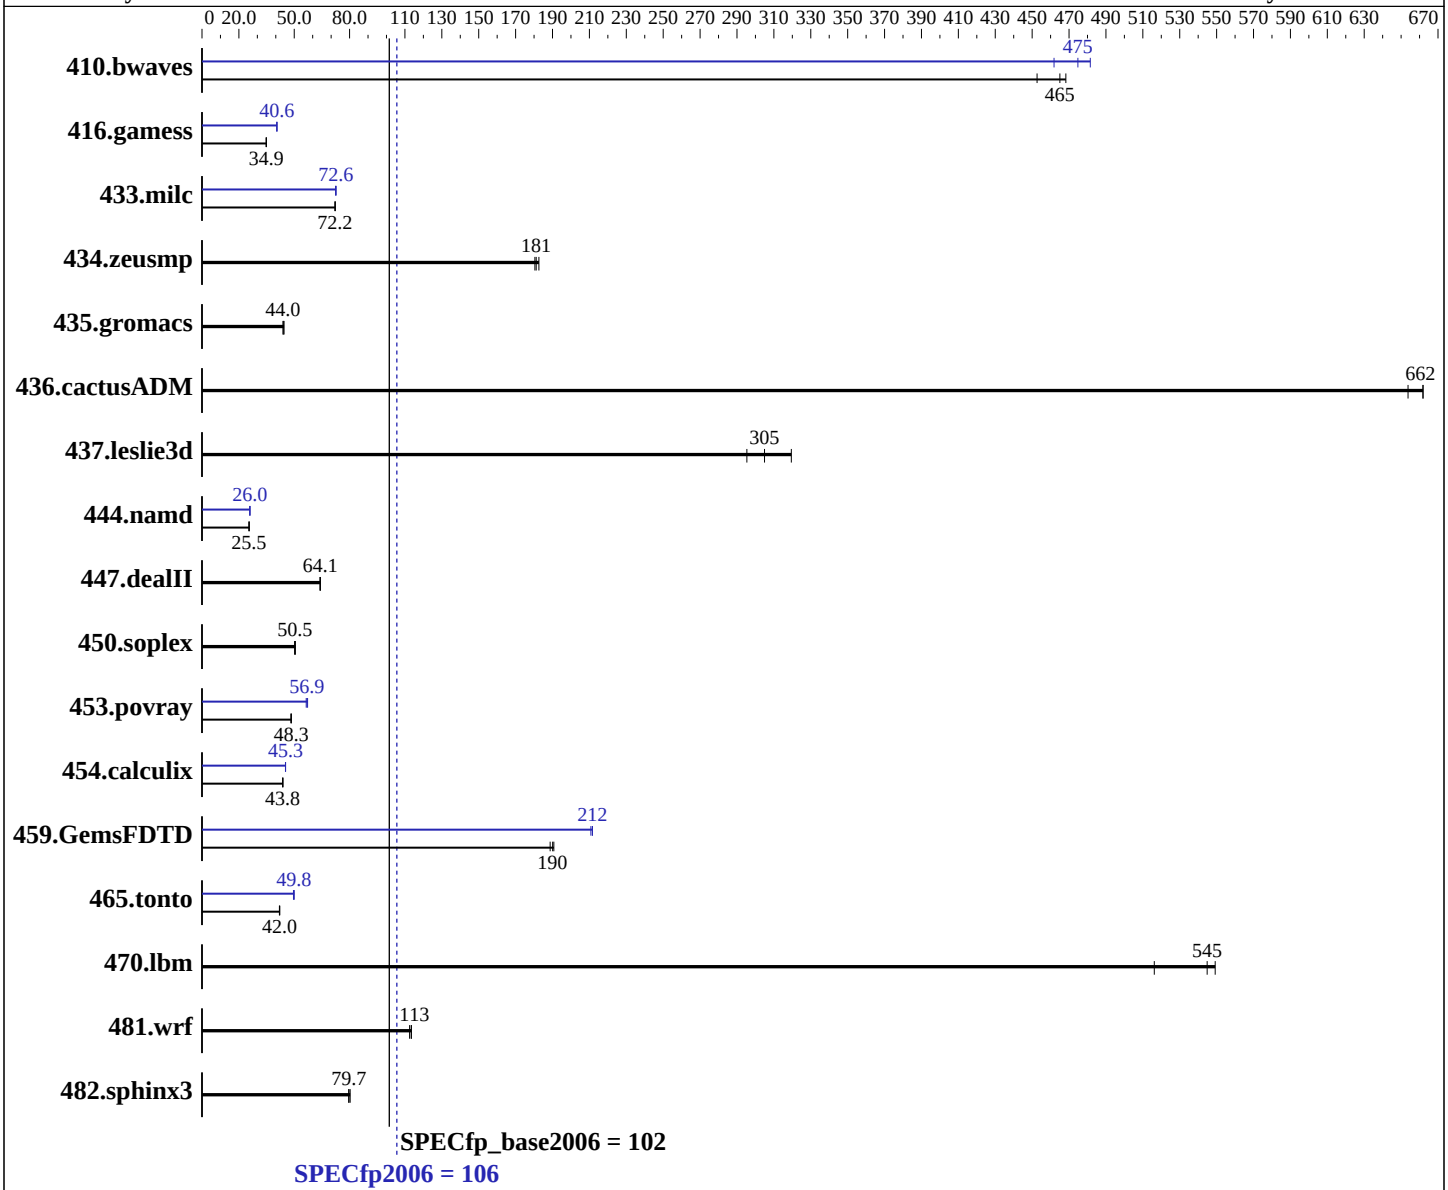

Hardware

CPU Name:	Intel Xeon E5-2690 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	20 cores, 2 chips, 10 cores/chip
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux; Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext3

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei CH140 (Intel Xeon E5-2690 v2)

SPECfp2006 = 106

SPECfp_base2006 = 102

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Jul-2014
Hardware Availability: Sep-2013
Software Availability: Nov-2013

L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (8 x 16 GB 2Rx4 PC3-14900R-13, ECC)
Disk Subsystem: 1 X 500 GB SATA 7200RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	29.0	468	30.0	453	**29.2**	**465**	29.4	462	**28.6**	**475**	28.2	482
416.gamess	**562**	**34.9**	562	34.9	562	34.8	482	40.6	**482**	**40.6**	483	40.6
433.milc	**127**	**72.2**	127	72.1	127	72.2	127	72.4	126	72.6	**126**	**72.6**
434.zeusmp	49.8	183	50.4	180	**50.2**	**181**	49.8	183	50.4	180	**50.2**	**181**
435.gromacs	161	44.5	**162**	**44.0**	162	44.0	161	44.5	**162**	**44.0**	162	44.0
436.cactusADM	18.3	654	**18.1**	**662**	18.1	662	18.3	654	**18.1**	**662**	18.1	662
437.leslie3d	**30.8**	**305**	29.4	319	31.8	295	**30.8**	**305**	29.4	319	31.8	295
444.namd	314	25.5	**314**	**25.5**	314	25.5	309	25.9	309	26.0	**309**	**26.0**
447.dealII	179	64.0	**178**	**64.1**	178	64.1	179	64.0	**178**	**64.1**	178	64.1
450.soplex	166	50.2	165	50.6	**165**	**50.5**	166	50.2	165	50.6	**165**	**50.5**
453.povray	110	48.4	110	48.3	**110**	**48.3**	92.9	57.2	94.2	56.5	**93.4**	**56.9**
454.calculix	188	43.8	**188**	**43.8**	188	43.8	182	45.3	182	45.2	**182**	**45.3**
459.GemsFDTD	56.2	189	**55.8**	**190**	55.6	191	50.3	211	50.1	212	**50.1**	**212**
465.tonto	**234**	**42.0**	235	42.0	233	42.2	197	50.0	198	49.6	**197**	**49.8**
470.lbm	26.6	516	25.0	549	**25.2**	**545**	26.6	516	25.0	549	**25.2**	**545**
481.wrf	99.3	113	**98.5**	**113**	98.4	113	99.3	113	**98.5**	**113**	98.4	113
482.sphinx3	245	79.5	**245**	**79.7**	243	80.3	245	79.5	**245**	**79.7**	243	80.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Set Power Efficiency Mode to Custom
Set Hyper-Threading to Disabled
Baseboard Management Controller used to adjust the fan speed to 100%
Sysinfo program /spec/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
running on localhost Tue Jul  1 22:03:16 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
```

Continued on next page

Platform Notes (Continued)

```
      http://www.spec.org/cpu2006/Docs/config.html#sysinfo

    From /proc/cpuinfo
       model name : Intel(R) Xeon(R) CPU E5-2690 v2 @ 3.00GHz
          2 "physical id"s (chips)
          20 "processors"
       cores, siblings (Caution: counting these is hw and system dependent.  The
       following excerpts from /proc/cpuinfo might not be reliable.  Use with
       caution.)
          cpu cores : 10
          siblings  : 10
          physical 0: cores 0 1 2 3 4 8 9 10 11 12
          physical 1: cores 0 1 2 3 4 8 9 10 11 12
       cache size : 25600 KB

    From /proc/meminfo
       MemTotal:       132105632 kB
       HugePages_Total:       0
       Hugepagesize:       2048 kB

    /usr/bin/lsb_release -d
       Red Hat Enterprise Linux Server release 6.5 (Santiago)

    From /etc/*release* /etc/*version*
       redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
       system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
       system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

    uname -a:
       Linux localhost 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
       x86_64 x86_64 x86_64 GNU/Linux

    run-level 3 Jul 1 16:39

    SPEC is set to: /spec
       Filesystem     Type  Size  Used Avail Use% Mounted on
       /dev/sda2      ext3  455G   83G  349G  20% /

    Additional information from dmidecode:
      Memory:
       8x Samsung M393B2G70BH0-CMA 16 GB 1866 MHz 2 rank

    (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,0,1"
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64"
OMP_NUM_THREADS = "20"
```

Continued on next page

General Notes (Continued)

```
Binaries compiled on a system with 2 x Xeon X5645 CPU + 16GB memory
using RHEL 6.1
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias
```

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias`

Fortran benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:
`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch -ansi-alias`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-static -auto-ilp32 -ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

444.namd: `-xAVX`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-fno-alias -auto-ilp32`

Continued on next page

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Sep 10 16:30:18 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 10 September 2014.