SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL460c Gen9
(2.30 GHz, Intel Xeon E5-2699 v3)

SPECfp®_rate2006 = 889

SPECfp_rate_base2006 = 862

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jul-2014
Hardware Availability: Sep-2014
Software Availability: Jun-2014

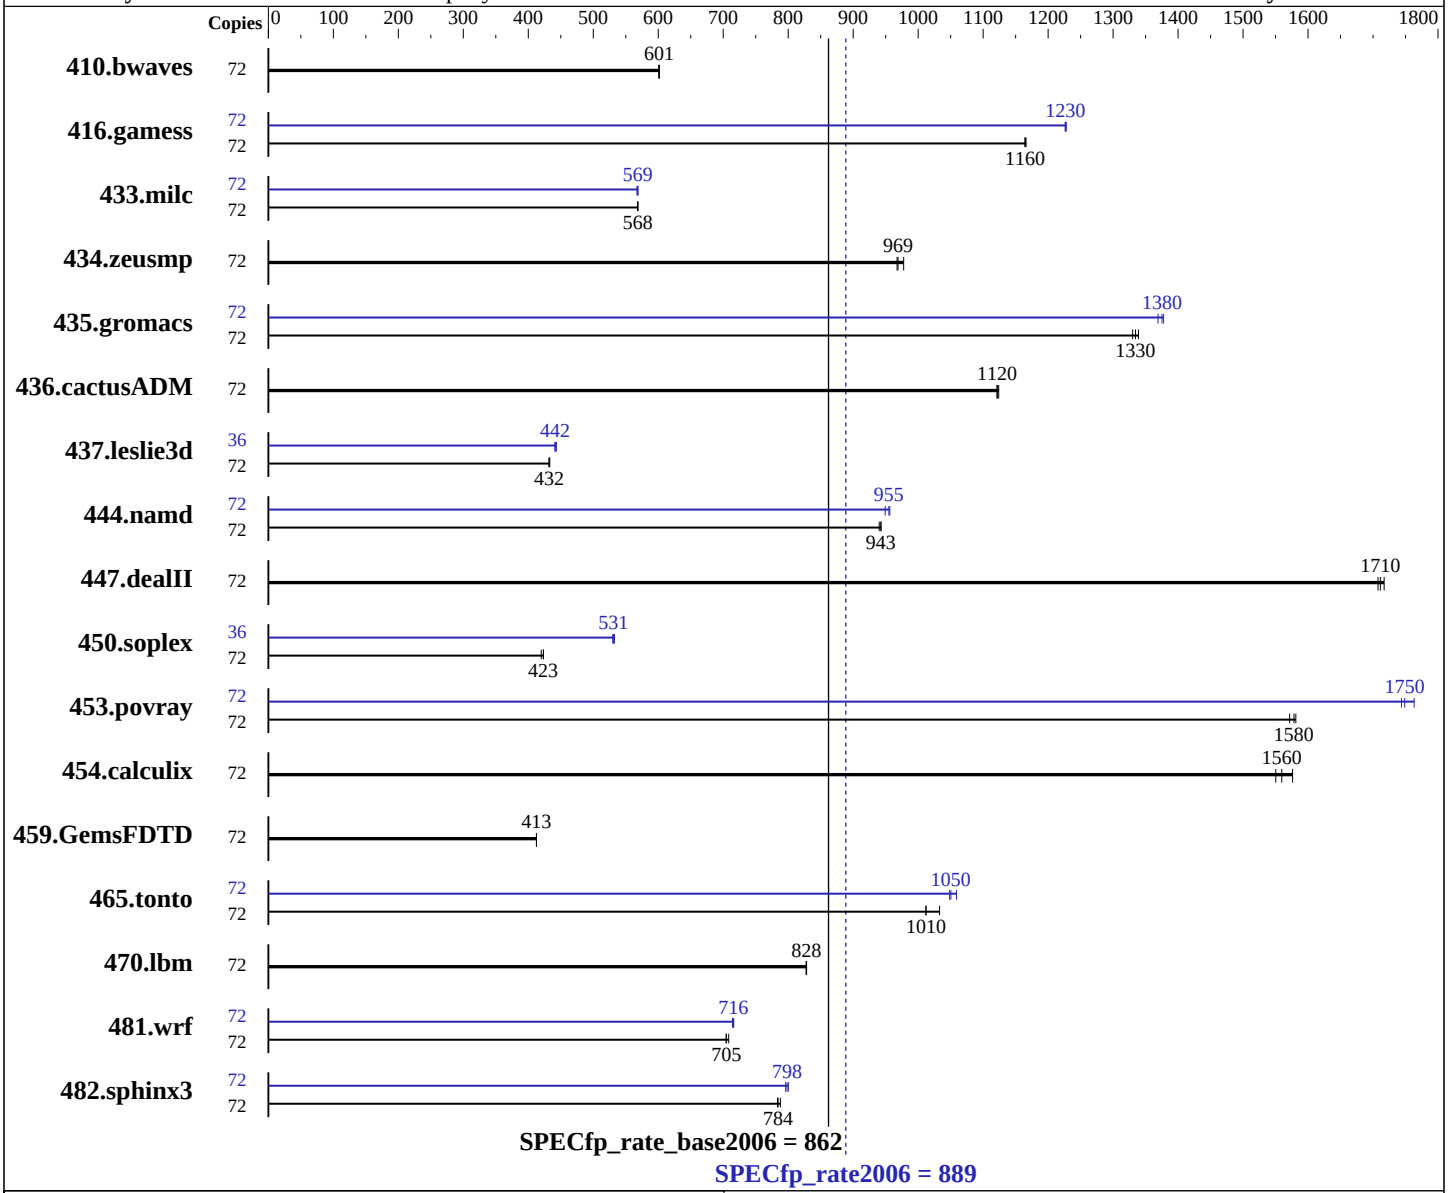

Hardware

CPU Name:	Intel Xeon E5-2699 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	36 cores, 2 chips, 18 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.0 (Maipo) Kernel 3.10.0-123.el7.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	xfs

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL460c Gen9
(2.30 GHz, Intel Xeon E5-2699 v3)

SPECfp_rate2006 = 889

SPECfp_rate_base2006 = 862

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jul-2014
Hardware Availability: Sep-2014
Software Availability: Jun-2014

L3 Cache:	45 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (8 x 32 GB 4DRx4 PC4-2133P-L)
Disk Subsystem:	2 x 400 GB SAS SSD, RAID 1
Other Hardware:	None

System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	72	1629	601	**1627**	**601**	1626	602	72	1629	601	**1627**	**601**	1626	602
416.gamess	72	1211	1160	1209	1170	**1210**	**1160**	72	1150	1230	1148	1230	**1149**	**1230**
433.milc	72	1162	569	**1163**	**568**	1163	568	72	1165	567	1162	569	**1163**	**569**
434.zeusmp	72	670	978	**676**	**969**	677	968	72	670	978	**676**	**969**	677	968
435.gromacs	72	**385**	**1330**	387	1330	384	1340	72	375	1370	373	1380	**374**	**1380**
436.cactusADM	72	767	1120	**767**	**1120**	766	1120	72	767	1120	**767**	**1120**	766	1120
437.leslie3d	72	1567	432	**1566**	**432**	1563	433	36	768	441	763	443	**766**	**442**
444.namd	72	**613**	**943**	612	943	614	940	72	608	949	604	956	**605**	**955**
447.dealII	72	**481**	**1710**	480	1720	482	1710	72	**481**	**1710**	480	1720	482	1710
450.soplex	72	1418	423	1430	420	**1419**	**423**	36	566	530	**566**	**531**	564	533
453.povray	72	244	1570	242	1580	**243**	**1580**	72	**219**	**1750**	220	1740	217	1760
454.calculix	72	**381**	**1560**	383	1550	377	1580	72	**381**	**1560**	383	1550	377	1580
459.GemsFDTD	72	1851	413	**1852**	**413**	1852	413	72	1851	413	**1852**	**413**	1852	413
465.tonto	72	686	1030	**700**	**1010**	700	1010	72	669	1060	676	1050	**674**	**1050**
470.lbm	72	1194	828	**1195**	**828**	1195	828	72	1194	828	**1195**	**828**	1195	828
481.wrf	72	1135	708	**1141**	**705**	1142	704	72	1126	714	1123	716	**1123**	**716**
482.sphinx3	72	1781	788	**1789**	**784**	1791	784	72	1763	796	**1758**	**798**	1754	800

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
 echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Platform Notes

```
 BIOS Configuration:
  HP Power Profile set to Custom
  HP Power Regulator set to HP Static High Performance Mode
  Minimum Processor Idle Power Package C-State set to No Package State
  Energy/Performance Bias set to Maximum Performance
  QPI Snoop Configuration set to Cluster on Die
  Thermal Configuration set to Maximum Cooling
  Processor Power and Utlization Monitoring set to Disabled
  Memory Refresh Rate set to 1x Refresh

  Sysinfo program /cpu2006/config/sysinfo.rev6818
  $Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
  running on BL460cGen9-VP2 Sat Jul 26 02:50:30 2014

  This section contains SUT (System Under Test) info as seen by
  some common utilities.  To remove or add to this section, see:
    http://www.spec.org/cpu2006/Docs/config.html#sysinfo

  From /proc/cpuinfo
     model name : Intel(R) Xeon(R) CPU E5-2699 v3 @ 2.30GHz
        2 "physical id"s (chips)
        72 "processors"
     cores, siblings (Caution: counting these is hw and system dependent.  The
     following excerpts from /proc/cpuinfo might not be reliable.  Use with
     caution.)
        cpu cores : 9
        siblings  : 18
        physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
        physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
     cache size : 23040 KB

  From /proc/meminfo
     MemTotal:       263839224 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux Server"
        VERSION="7.0 (Maipo)"
        ID="rhel"
        ID_LIKE="fedora"
        VERSION_ID="7.0"
        PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
        ANSI_COLOR="0;31"
        CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
     redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
     system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

  uname -a:
     Linux BL460cGen9-VP2 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57 EDT 2014
```

Continued on next page

Platform Notes (Continued)

```
      x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 Jul 25 13:56

   SPEC is set to: /cpu2006
      Filesystem            Type  Size  Used Avail Use% Mounted on
      /dev/mapper/rhel-root ext4  310G   73G  222G  25% /

   Additional information from dmidecode:
     BIOS HP I36 07/11/2014
     Memory:
      7x HP NOT AVAILABLE 32 GB 2133 MHz 4 rank
      8x UNKNOWN NOT AVAILABLE
      1x UNKNOWN NOT AVAILABLE 32 GB 2133 MHz 4 rank

   (End of data from sysinfo program)
Regarding the sysinfo display about the memory installed, the correct amount of
memory is 256 GB and the dmidecode description should have two lines reading as:
 7x HP NOT AVAILABLE 32 GB 2133 MHz 4 rank
 1x UNKNOWN NOT AVAILABLE 32 GB 2133 MHz 4 rank
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RedHat EL 6.4
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`

Continued on next page

Base Portability Flags (Continued)

416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32

Continued on next page

Peak Compiler Invocation (Continued)

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
-unroll2

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revA.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Sep 24 16:18:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 September 2014.