



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T630 (Intel Xeon E5-2603 v3,
1.60 GHz)

SPECfp®_rate2006 = 283

SPECfp_rate_base2006 = 278

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jul-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

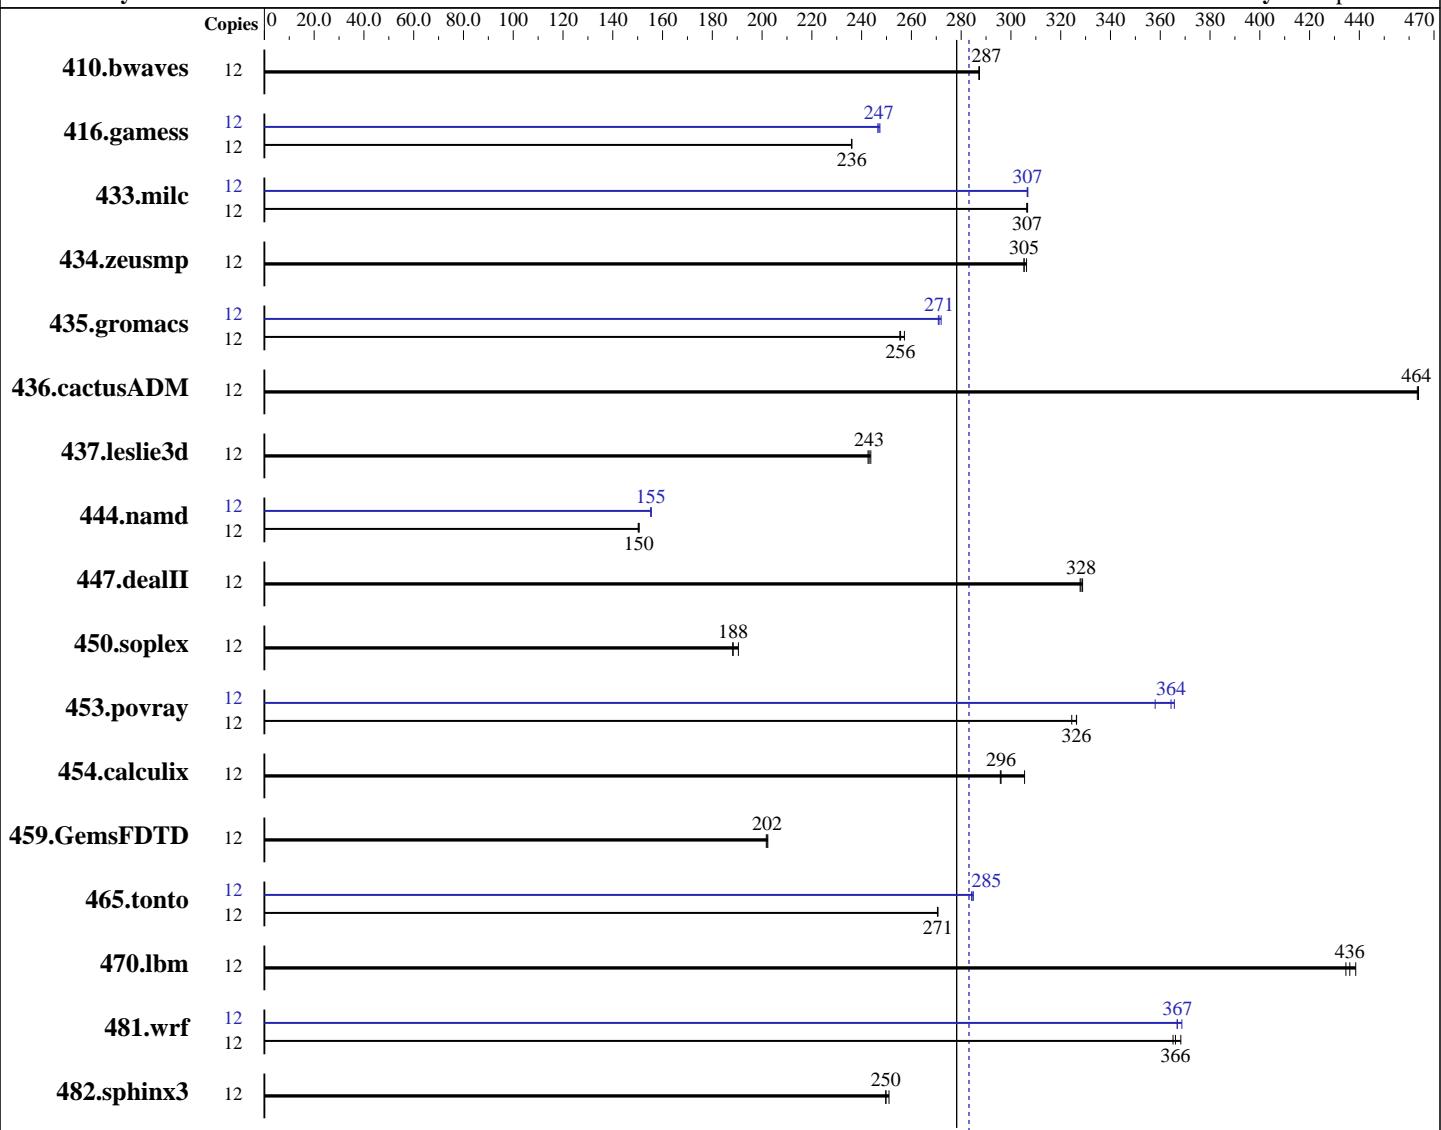

SPECfp_rate_base2006 = 278

SPECfp_rate2006 = 283

Hardware

CPU Name: Intel Xeon E5-2603 v3
CPU Characteristics:
CPU MHz: 1600
FPU: Integrated
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
CPU(s) orderable: 1,2 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
3.0.76-0.11-default
Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE
for Linux;
Fortran: Version 14.0.0.080 of Intel Fortran
Studio XE for Linux
Auto Parallel:
File System: ext2
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T630 (Intel Xeon E5-2603 v3,
1.60 GHz)

SPECfp_rate2006 = 283

SPECfp_rate_base2006 = 278

CPU2006 license: 55

Test date: Jul-2014

Test sponsor: Dell Inc.

Hardware Availability: Sep-2014

Tested by: Dell Inc.

Software Availability: Sep-2014

L3 Cache:	15 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem:	1 x 300 GB 15000 RPM SAS
Other Hardware:	None

Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	568	287	568	287	568	287	12	568	287	568	287	568	287		
416.gamess	12	996	236	995	236	995	236	12	953	246	950	247	951	247		
433.milc	12	359	307	360	306	359	307	12	359	307	359	307	359	307		
434.zeusmp	12	358	305	357	306	358	305	12	358	305	357	306	358	305		
435.gromacs	12	336	255	335	256	333	257	12	315	272	316	271	316	271		
436.cactusADM	12	309	464	310	463	309	464	12	309	464	310	463	309	464		
437.leslie3d	12	464	243	463	244	465	243	12	464	243	463	244	465	243		
444.namd	12	641	150	640	150	639	151	12	620	155	619	155	620	155		
447.dealII	12	418	329	419	328	418	328	12	418	329	419	328	418	328		
450.soplex	12	525	190	532	188	531	188	12	525	190	532	188	531	188		
453.povray	12	196	326	197	324	196	326	12	175	364	178	358	175	366		
454.calculix	12	334	296	324	305	335	296	12	334	296	324	305	335	296		
459.GemsFDTD	12	629	202	631	202	630	202	12	629	202	631	202	630	202		
465.tonto	12	437	270	436	271	436	271	12	416	284	415	285	415	285		
470.lbm	12	376	439	378	436	379	435	12	376	439	378	436	379	435		
481.wrf	12	366	366	367	365	364	368	12	365	367	365	367	364	369		
482.sphinx3	12	932	251	936	250	937	250	12	932	251	936	250	937	250		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:

Snoop Mode set to Early Snoop

Virtualization Technology disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T630 (Intel Xeon E5-2603 v3,
1.60 GHz)

SPECfp_rate2006 = 283

SPECfp_rate_base2006 = 278

CPU2006 license: 55

Test date: Jul-2014

Test sponsor: Dell Inc.

Hardware Availability: Sep-2014

Tested by: Dell Inc.

Software Availability: Sep-2014

Platform Notes (Continued)

```
Execute Disable disabled
System Profile set to Performance
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on linux Tue Jul  8 18:40:56 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2603 v3 @ 1.60GHz
        2 "physical id"s (chips)
        12 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The
    following excerpts from /proc/cpuinfo might not be reliable. Use with
    caution.)
        cpu cores : 6
        siblings : 6
        physical 0: cores 0 1 2 3 4 5
        physical 1: cores 0 1 2 3 4 5
    cache size : 15360 KB
```

```
From /proc/meminfo
    MemTotal:      264572124 kB
    HugePages_Total:       0
    Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 11 (x86_64)
    VERSION = 11
    PATCHLEVEL = 3
```

```
uname -a:
Linux linux 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013 (ccab990)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul  8 07:36 last=S
```

```
SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext2  222G   10G  211G   5%  /
```

Additional information from dmidecode:

BIOS Dell Inc. 0.3.27 07/04/2014

Memory:

8x 002C00B3002C 36ASF2G72PZ-2G1A1 16 GB 1600 MHz
4x 00AD00B300AD HMA42GR7MFR4N-TFTD 16 GB 1600 MHz

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T630 (Intel Xeon E5-2603 v3,
1.60 GHz)

SPECfp_rate2006 = 283

SPECfp_rate_base2006 = 278

CPU2006 license: 55

Test date: Jul-2014

Test sponsor: Dell Inc.

Hardware Availability: Sep-2014

Tested by: Dell Inc.

Software Availability: Sep-2014

Platform Notes (Continued)

4x 00CE00B300CE M393A2G40DB0-CPB 16 GB 1600 MHz
8x Not Specified Not Specified

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T630 (Intel Xeon E5-2603 v3,
1.60 GHz)

SPECfp_rate2006 = 283

SPECfp_rate_base2006 = 278

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jul-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Base Portability Flags (Continued)

```
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
465.tonto: -DSPEC_CPU_LP64  
470.lbm: -DSPEC_CPU_LP64  
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX  
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T630 (Intel Xeon E5-2603 v3,
1.60 GHz)

SPECfp_rate2006 = 283

SPECfp_rate_base2006 = 278

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jul-2014

Hardware Availability: Sep-2014

Software Availability: Sep-2014

Peak Optimization Flags

C benchmarks:

```
433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2)
           -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
           -auto-ilp32
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: basepeak = yes
```

C++ benchmarks:

```
444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2)
           -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32
```

```
447.dealII: basepeak = yes
```

```
450.soplex: basepeak = yes
```

```
453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2)
            -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll14
            -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: basepeak = yes
```

```
416.games: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
            -inline-level=0 -scalar-rep-
```

```
434.zeusmp: basepeak = yes
```

```
437.leslie3d: basepeak = yes
```

```
459.GemsFDTD: basepeak = yes
```

```
465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14
            -auto -inline-calloc -opt-malloc-options=3
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2)
              -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
              -opt-prefetch -auto-ilp32
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge T630 (Intel Xeon E5-2603 v3,
1.60 GHz)

SPECfp_rate2006 = 283

SPECfp_rate_base2006 = 278

CPU2006 license: 55

Test date: Jul-2014

Test sponsor: Dell Inc.

Hardware Availability: Sep-2014

Tested by: Dell Inc.

Software Availability: Sep-2014

Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Sep 24 16:20:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 September 2014.