



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2018TP-DTFR  
(X10DRT-PIBF , Intel Xeon E5-2699 v3)

**SPECfp®\_rate2006 = 927**

**SPECfp\_rate\_base2006 = 897**

CPU2006 license: 001176


Test date: Aug-2014

Test sponsor: Supermicro

Hardware Availability: Sep-2014

Tested by: Supermicro

Software Availability: Nov-2013

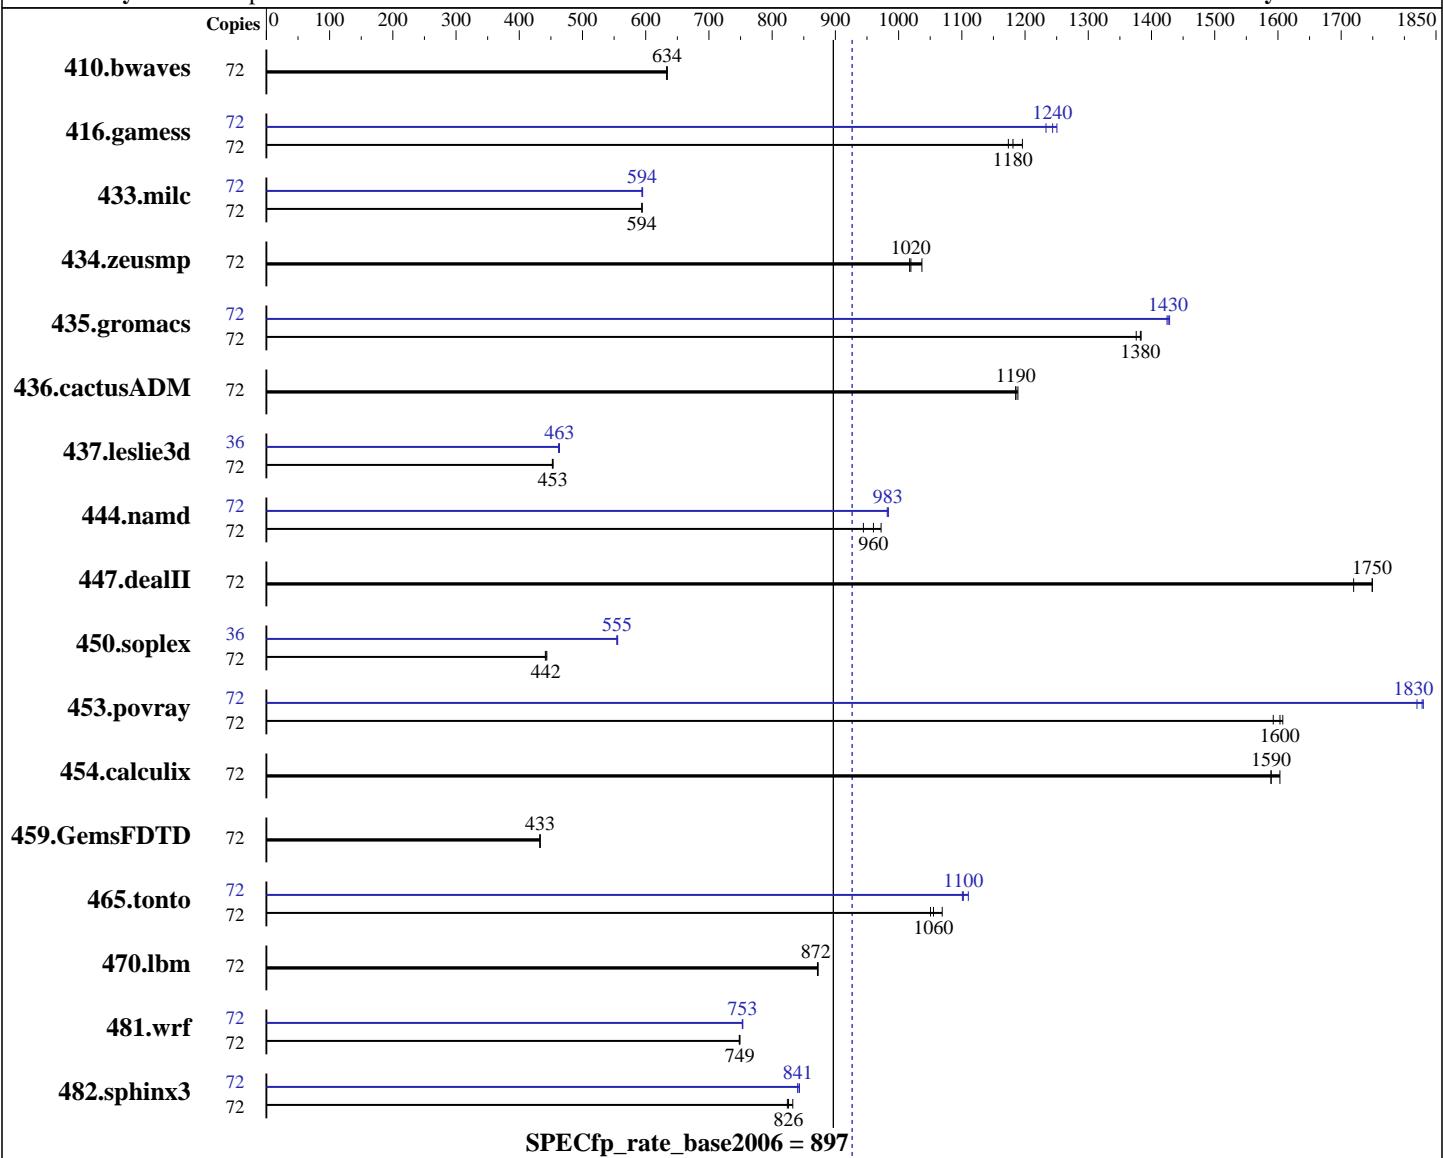

**SPECfp\_rate\_base2006 = 897**

**SPECfp\_rate2006 = 927**

### Hardware

CPU Name: Intel Xeon E5-2699 v3  
CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
CPU MHz: 2300  
FPU: Integrated  
CPU(s) enabled: 36 cores, 2 chips, 18 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5, Kernel 2.6.32-431.el6.x86\_64  
Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
Auto Parallel: No  
File System: ext4  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2018TP-DTFR  
(X10DRT-PIBF, Intel Xeon E5-2699 v3)

**SPECfp\_rate2006 = 927**

**SPECfp\_rate\_base2006 = 897**

**CPU2006 license:** 001176

**Test date:** Aug-2014

**Test sponsor:** Supermicro

**Hardware Availability:** Sep-2014

**Tested by:** Supermicro

**Software Availability:** Nov-2013

L3 Cache: 45 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
Disk Subsystem: 1 x 1 TB SATA III, 7200 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	72	1545	633	1543	634	<b>1544</b>	<b>634</b>	72	1545	633	1543	634	<b>1544</b>	<b>634</b>
416.gamess	72	1201	1170	<b>1194</b>	<b>1180</b>	1179	1200	72	1143	1230	1127	1250	<b>1134</b>	<b>1240</b>
433.milc	72	1113	594	1112	594	<b>1113</b>	<b>594</b>	72	1111	595	<b>1112</b>	<b>594</b>	1112	594
434.zeusmp	72	632	1040	644	1020	<b>643</b>	<b>1020</b>	72	632	1040	644	1020	<b>643</b>	<b>1020</b>
435.gromacs	72	<b>372</b>	<b>1380</b>	372	1380	374	1380	72	361	1420	360	1430	<b>360</b>	<b>1430</b>
436.cactusADM	72	726	1190	724	1190	<b>726</b>	<b>1190</b>	72	726	1190	724	1190	<b>726</b>	<b>1190</b>
437.leslie3d	72	<b>1494</b>	<b>453</b>	1496	452	1493	453	36	730	464	732	462	<b>730</b>	<b>463</b>
444.namd	72	594	972	<b>601</b>	<b>960</b>	612	944	72	<b>587</b>	<b>983</b>	588	982	587	984
447.dealII	72	479	1720	<b>471</b>	<b>1750</b>	471	1750	72	479	1720	<b>471</b>	<b>1750</b>	471	1750
450.soplex	72	1354	444	<b>1358</b>	<b>442</b>	1361	441	36	<b>541</b>	<b>555</b>	542	554	540	556
453.povray	72	<b>239</b>	<b>1600</b>	241	1590	238	1610	72	210	1820	209	1830	<b>210</b>	<b>1830</b>
454.calculix	72	371	1600	<b>374</b>	<b>1590</b>	374	1590	72	371	1600	<b>374</b>	<b>1590</b>	374	1590
459.GemsFDTD	72	1766	433	<b>1765</b>	<b>433</b>	1764	433	72	1766	433	<b>1765</b>	<b>433</b>	1764	433
465.tonto	72	674	1050	<b>671</b>	<b>1060</b>	663	1070	72	638	1110	<b>643</b>	<b>1100</b>	644	1100
470.lbm	72	1135	872	<b>1134</b>	<b>872</b>	1134	873	72	1135	872	<b>1134</b>	<b>872</b>	1134	873
481.wrf	72	1075	748	<b>1074</b>	<b>749</b>	1074	749	72	1067	754	<b>1068</b>	<b>753</b>	1068	753
482.sphinx3	72	1685	833	1703	824	<b>1699</b>	<b>826</b>	72	1664	843	<b>1669</b>	<b>841</b>	1670	840

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

### BIOS Settings:

Enforce POR set to Disabled  
Memory Frequency set to 2133

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2018TP-DTFR  
(X10DRT-PIBF , Intel Xeon E5-2699 v3)

**SPECfp\_rate2006 = 927**

**SPECfp\_rate\_base2006 = 897**

**CPU2006 license:** 001176

**Test date:** Aug-2014

**Test sponsor:** Supermicro

**Hardware Availability:** Sep-2014

**Tested by:** Supermicro

**Software Availability:** Nov-2013

## Platform Notes (Continued)

COD Enable set to Enabled  
Early Snoop set to Disabled

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/Trial/SPEC2006\_v11/libs/32:/home/Trial/SPEC2006\_v11/libs/64:/home/Trial/SPEC2006\_v11/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2018TP-DTFR  
(X10DRT-PIBF , Intel Xeon E5-2699 v3)

**SPECfp\_rate2006 = 927**

**SPECfp\_rate\_base2006 = 897**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Aug-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Nov-2013

## Base Portability Flags (Continued)

465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

SuperServer 2018TP-DTFR  
(X10DRT-PIBF , Intel Xeon E5-2699 v3)

**SPECfp\_rate2006 = 927**

**SPECfp\_rate\_base2006 = 897**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Aug-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Nov-2013

## Peak Portability Flags (Continued)

```
416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2)
  -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
  -auto-ilp32
```

470.lbm: basepeak = yes

```
482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
  -unroll2
```

C++ benchmarks:

```
444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2)
  -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
  -auto-ilp32
```

447.dealII: basepeak = yes

```
450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2)
  -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
  -opt-malloc-options=3
```

```
453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2)
  -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
  -ansi-alias
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

SuperServer 2018TP-DTFR  
(X10DRT-PIBF , Intel Xeon E5-2699 v3)

**SPECfp\_rate2006 = 927**

**SPECfp\_rate\_base2006 = 897**

**CPU2006 license:** 001176

**Test date:** Aug-2014

**Test sponsor:** Supermicro

**Hardware Availability:** Sep-2014

**Tested by:** Supermicro

**Software Availability:** Nov-2013

## Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revE.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

SuperServer 2018TP-DTFR  
(X10DRT-PIBF , Intel Xeon E5-2699 v3)

**SPECfp\_rate2006 = 927**

**SPECfp\_rate\_base2006 = 897**

**CPU2006 license:** 001176

**Test date:** Aug-2014

**Test sponsor:** Supermicro

**Hardware Availability:** Sep-2014

**Tested by:** Supermicro

**Software Availability:** Nov-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Fri Sep 26 16:58:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 September 2014.