SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH1288 V2 (Intel Xeon E5-2667 v2)

SPECfp®_rate2006 = 608

SPECfp_rate_base2006 = 591

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Sep-2014
Hardware Availability: Sep-2013
Software Availability: Nov-2013

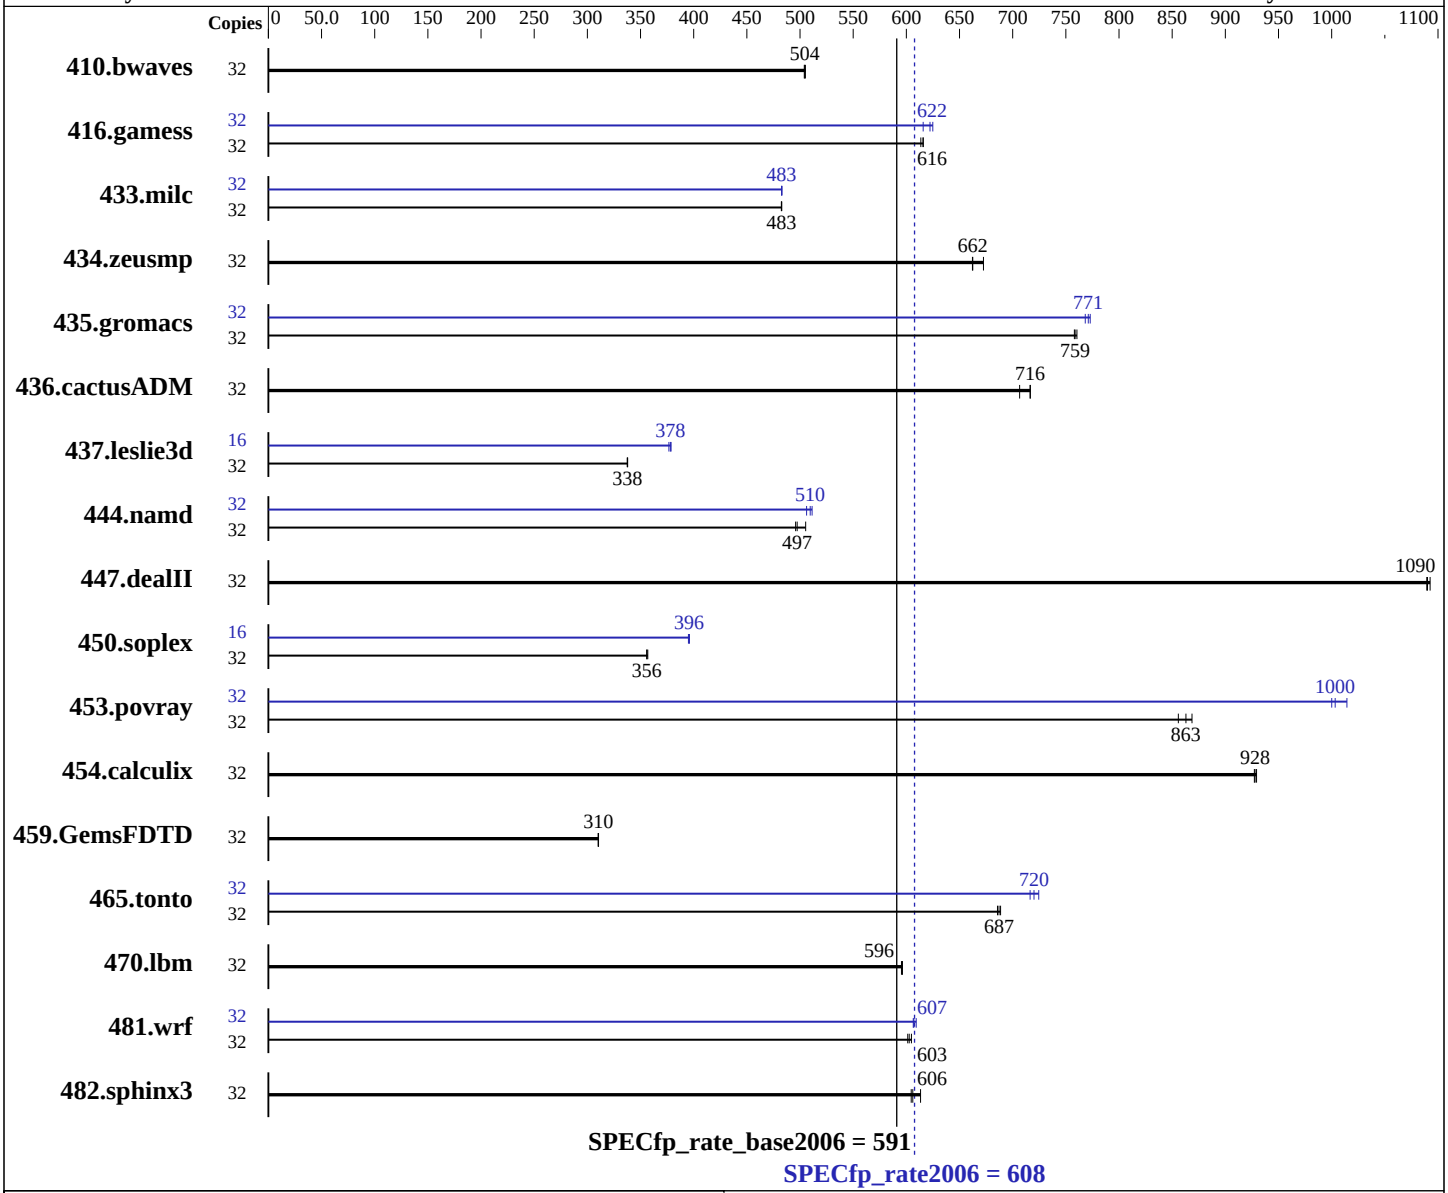

Hardware

CPU Name:	Intel Xeon E5-2667 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 4.00 GHz
CPU MHz:	3300
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH1288 V2 (Intel Xeon E5-2667 v2)

SPECfp_rate2006 = 608

SPECfp_rate_base2006 = 591

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Sep-2014
Hardware Availability: Sep-2013
Software Availability: Nov-2013

L3 Cache:	25 MB I+D on chip per chip	System State:	Run level 3 (multi-user)
Other Cache:	None	Base Pointers:	32/64-bit
Memory:	256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)	Peak Pointers:	32/64-bit
Disk Subsystem:	1 x 300 GB SATA, 7200RPM	Other Software:	None
Other Hardware:	None		

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	861	505	863	504	**862**	**504**	32	861	505	863	504	**862**	**504**
416.gamess	32	**1018**	**616**	1021	614	1017	616	32	**1007**	**622**	1017	616	1003	625
433.milc	32	**609**	**483**	609	483	609	482	32	609	483	**609**	**483**	608	483
434.zeusmp	32	440	662	433	673	**440**	**662**	32	440	662	433	673	**440**	**662**
435.gromacs	32	300	760	**301**	**759**	301	758	32	297	768	**296**	**771**	296	773
436.cactusADM	32	**534**	**716**	534	717	541	707	32	**534**	**716**	534	717	541	707
437.leslie3d	32	890	338	891	338	**891**	**338**	16	397	379	**398**	**378**	399	377
444.namd	32	**516**	**497**	508	505	518	496	32	502	511	**504**	**510**	507	506
447.dealII	32	335	1090	**336**	**1090**	336	1090	32	335	1090	**336**	**1090**	336	1090
450.soplex	32	**750**	**356**	748	357	750	356	16	**337**	**396**	337	396	338	395
453.povray	32	196	869	199	856	**197**	**863**	32	**170**	**1000**	168	1010	170	1000
454.calculix	32	**284**	**928**	285	927	284	929	32	**284**	**928**	285	927	284	929
459.GemsFDTD	32	**1094**	**310**	1093	310	1095	310	32	**1094**	**310**	1093	310	1095	310
465.tonto	32	457	689	459	686	**458**	**687**	32	**437**	**720**	440	716	435	725
470.lbm	32	737	596	738	595	**737**	**596**	32	737	596	738	595	**737**	**596**
481.wrf	32	**593**	**603**	591	605	594	601	32	587	609	**589**	**607**	589	607
482.sphinx3	32	1017	613	1032	605	**1029**	**606**	32	1017	613	1032	605	**1029**	**606**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Sysinfo program /spec14/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Thu Sep 11 18:19:48 2014
```

Continued on next page

Platform Notes (Continued)

```
This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2667 v2 @ 3.30GHz
      2 "physical id"s (chips)
      32 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 8
      siblings  : 16
      physical 0: cores 1 2 3 4 8 9 10 11
      physical 1: cores 1 2 3 4 8 9 10 11
   cache size : 25600 KB

From /proc/meminfo
   MemTotal:       264478184 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*
   redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
   system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
   Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54
   EST 2013 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Sep 11 18:14

SPEC is set to: /spec14
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda2      ext4  265G   36G  216G  15% /

Additional information from dmidecode:
  BIOS Insyde Corp. RMIBV629 05/12/2014
  Memory:
   16x Micron 36JSF2G72PZ-1G9E1 16 GB 1866 MHz 2 rank
   8x NO DIMM NO DIMM

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec14/libs/32:/spec14/libs/64:/spec14/sh"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RedHat EL 6.4
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
     410.bwaves: -DSPEC_CPU_LP64
     416.gamess: -DSPEC_CPU_LP64
       433.milc: -DSPEC_CPU_LP64
     434.zeusmp: -DSPEC_CPU_LP64
     435.gromacs: -DSPEC_CPU_LP64 -nofor_main
  436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
     437.leslie3d: -DSPEC_CPU_LP64
       444.namd: -DSPEC_CPU_LP64
     447.dealII: -DSPEC_CPU_LP64
      450.soplex: -DSPEC_CPU_LP64
      453.povray: -DSPEC_CPU_LP64
     454.calculix: -DSPEC_CPU_LP64 -nofor_main
   459.GemsFDTD: -DSPEC_CPU_LP64
       465.tonto: -DSPEC_CPU_LP64
        470.lbm: -DSPEC_CPU_LP64
        481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
    482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3`

C++ benchmarks:
`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3`

Fortran benchmarks:
`-xAVX -ipo -O3 -no-prec-div -opt-prefetch`

Benchmarks using both Fortran and C:
`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Oct 14 13:27:32 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 October 2014.