SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M1, Intel Xeon E3-1231 v3, 3.40 GHz

SPECfp®2006 = 74.2

SPECfp_base2006 = 72.8

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jul-2014
Hardware Availability: Jul-2014
Software Availability: Nov-2013

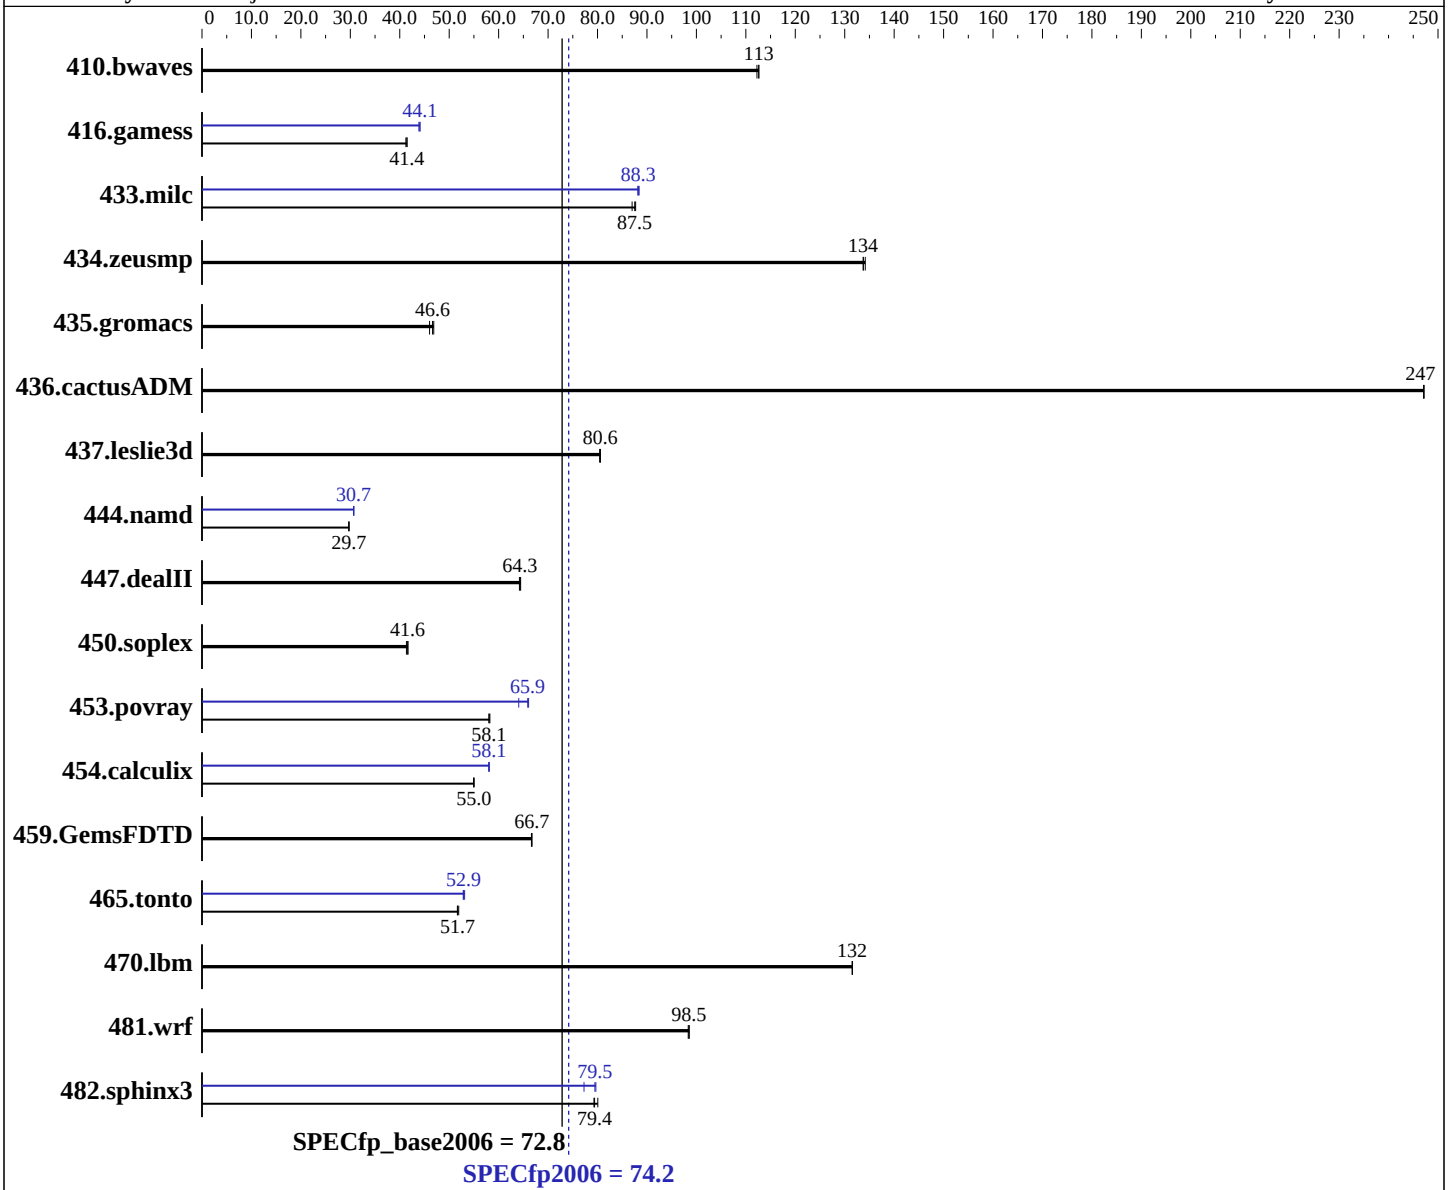

Hardware

CPU Name:	Intel Xeon E3-1231 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.80 GHz
CPU MHz:	3400
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1330 M1, Intel Xeon E3-1231 v3, 3.40 GHz

SPECfp2006 = 74.2

SPECfp_base2006 = 72.8

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jul-2014
Hardware Availability: Jul-2014
Software Availability: Nov-2013

L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	32 GB (4 x 8 GB 2Rx8 PC3L-12800E-11, ECC)
Disk Subsystem:	1 x SATA, 500 GB, 7200 RPM
Other Hardware:	None

System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other Software:	None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	121	112	**121**	**113**	121	113	121	112	**121**	**113**	121	113
416.gamess	475	41.2	**472**	**41.4**	472	41.5	446	43.9	**444**	**44.1**	444	44.1
433.milc	105	87.7	**105**	**87.5**	106	87.0	104	88.4	**104**	**88.3**	104	88.1
434.zeusmp	**68.0**	**134**	67.8	134	68.0	134	**68.0**	**134**	67.8	134	68.0	134
435.gromacs	152	46.9	155	46.0	**153**	**46.6**	152	46.9	155	46.0	**153**	**46.6**
436.cactusADM	48.4	247	**48.4**	**247**	48.4	247	48.4	247	**48.4**	**247**	48.4	247
437.leslie3d	117	80.6	117	80.4	**117**	**80.6**	117	80.6	117	80.4	**117**	**80.6**
444.namd	270	29.7	**270**	**29.7**	270	29.7	261	30.7	261	30.7	**261**	**30.7**
447.dealII	**178**	**64.3**	178	64.5	178	64.2	**178**	**64.3**	178	64.5	178	64.2
450.soplex	202	41.4	**200**	**41.6**	200	41.7	202	41.4	**200**	**41.6**	200	41.7
453.povray	91.7	58.0	91.4	58.2	**91.6**	**58.1**	**80.8**	**65.9**	80.5	66.1	83.0	64.1
454.calculix	150	54.9	150	55.0	**150**	**55.0**	**142**	**58.1**	142	58.0	142	58.1
459.GemsFDTD	159	66.6	159	66.7	**159**	**66.7**	159	66.6	159	66.7	**159**	**66.7**
465.tonto	189	51.9	190	51.7	**190**	**51.7**	**186**	**52.9**	185	53.1	186	52.8
470.lbm	104	132	**104**	**132**	104	132	104	132	**104**	**132**	104	132
481.wrf	113	98.5	**113**	**98.5**	114	98.3	113	98.5	**113**	**98.5**	114	98.3
482.sphinx3	243	80.1	**245**	**79.4**	246	79.3	245	79.7	252	77.3	**245**	**79.5**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64:/SPECcpu2006/sh"
OMP_NUM_THREADS = "4"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RedHat EL 6.4
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 runspec command invoked through numactl i.e.:
```

Continued on next page

General Notes (Continued)

```
numactl --interleave=all runspec <etc>
For information about Fujitsu please visit: http://www.fujitsu.com
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

C++ benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Continued on next page

Base Optimization Flags (Continued)

Fortran benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch`

Benchmarks using both Fortran and C:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias`

Peak Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

433.milc: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-auto-ilp32 -ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `-xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias -parallel`

C++ benchmarks:

444.namd: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-fno-alias -auto-ilp32`

Continued on next page

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revB.html
http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20130924.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revB.xml
http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20130924.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Oct 16 12:00:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 October 2014.