SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei CH222 V3 (Intel Xeon E5-2623 v3)

SPECfp®2006 = 93.4

SPECfp_base2006 = 90.0

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: May-2015
Hardware Availability: Sep-2014
Software Availability: Jun-2014

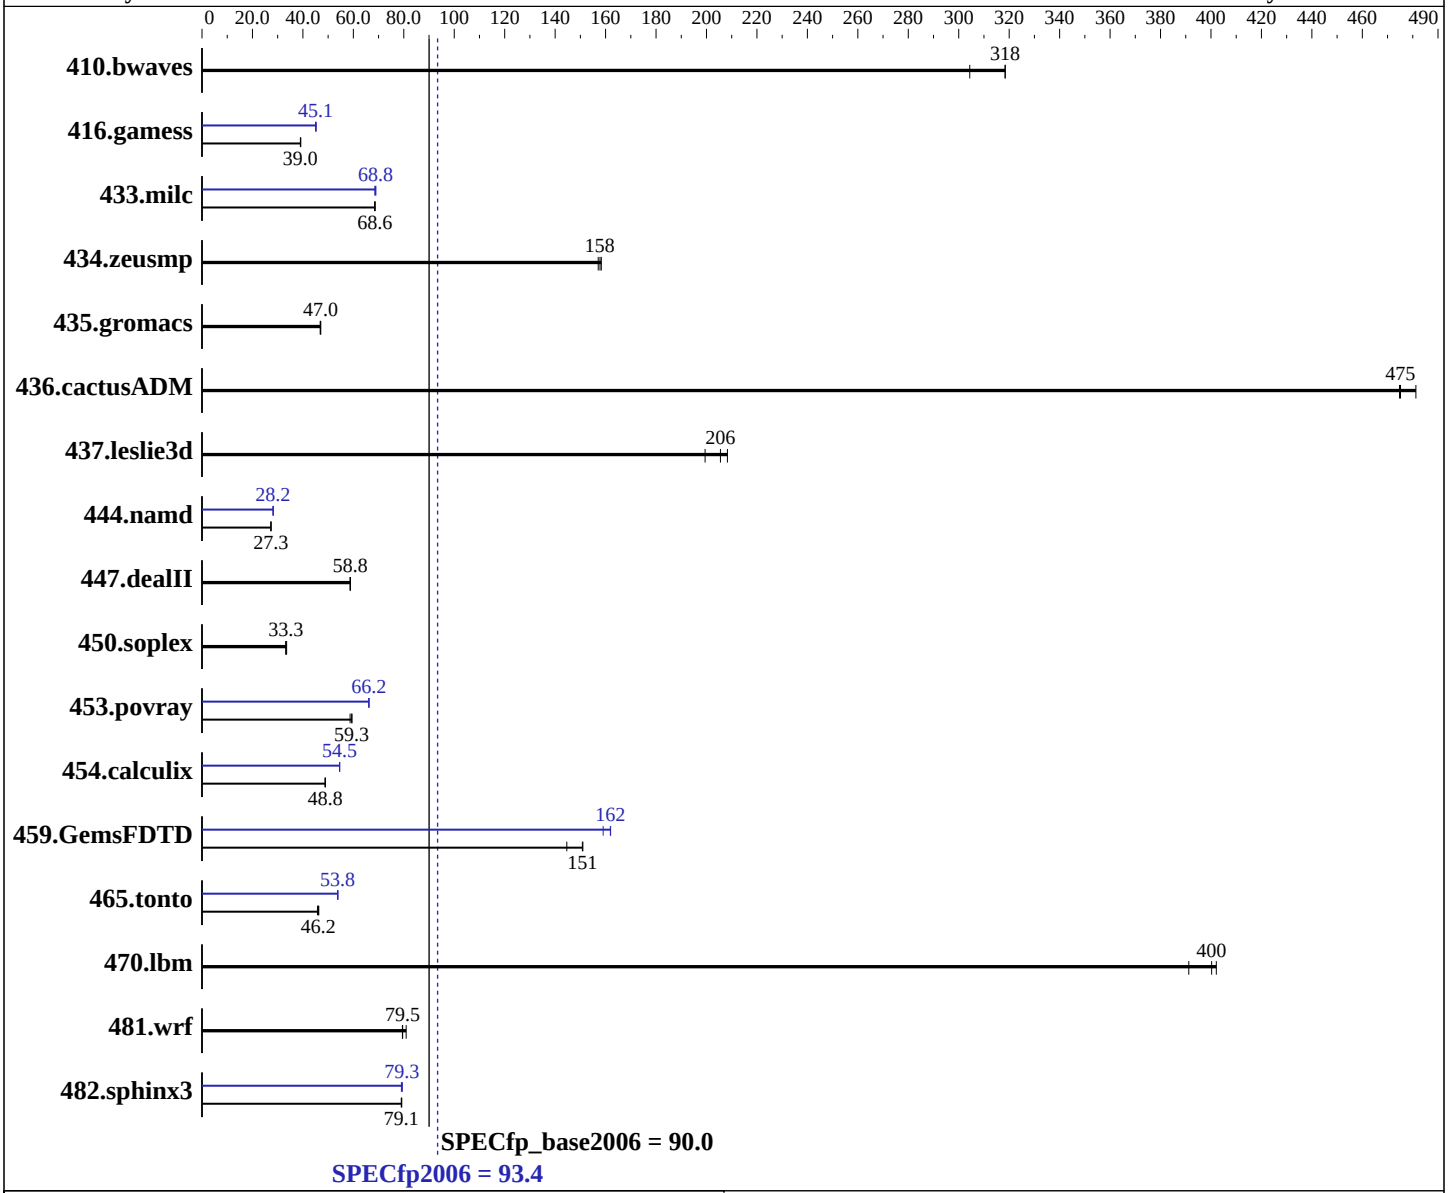

Hardware

CPU Name:	Intel Xeon E5-2623 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.50 GHz
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.0 (Maipo) 3.10.0-123.el7.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei CH222 V3 (Intel Xeon E5-2623 v3)

SPECfp2006 = 93.4

SPECfp_base2006 = 90.0

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: May-2015
Hardware Availability: Sep-2014
Software Availability: Jun-2014

L3 Cache: 10 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R , running at 1867 MHz)
Disk Subsystem: 1 x 300 GB SAS, 10K RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	44.6	304	42.7	318	**42.7**	**318**	44.6	304	42.7	318	**42.7**	**318**
416.gamess	**502**	**39.0**	502	39.0	500	39.2	**434**	**45.1**	432	45.3	435	45.0
433.milc	**134**	**68.6**	134	68.6	134	68.4	134	68.5	**133**	**68.8**	133	68.9
434.zeusmp	57.9	157	57.5	158	**57.7**	**158**	57.9	157	57.5	158	**57.7**	**158**
435.gromacs	**152**	**47.0**	152	46.9	152	47.0	**152**	**47.0**	152	46.9	152	47.0
436.cactusADM	25.2	475	24.8	481	**25.2**	**475**	25.2	475	24.8	481	**25.2**	**475**
437.leslie3d	**45.7**	**206**	45.1	208	47.1	199	**45.7**	**206**	45.1	208	47.1	199
444.namd	293	27.3	293	27.3	**293**	**27.3**	**284**	**28.2**	284	28.2	284	28.2
447.dealII	**195**	**58.8**	194	58.8	195	58.7	**195**	**58.8**	194	58.8	195	58.7
450.soplex	251	33.2	249	33.6	**251**	**33.3**	251	33.2	249	33.6	**251**	**33.3**
453.povray	**89.7**	**59.3**	89.5	59.5	90.6	58.7	80.5	66.1	80.4	66.2	**80.4**	**66.2**
454.calculix	**169**	**48.8**	169	48.8	169	48.9	151	54.6	151	54.5	**151**	**54.5**
459.GemsFDTD	70.3	151	73.4	145	**70.4**	**151**	66.7	159	65.5	162	**65.5**	**162**
465.tonto	213	46.3	215	45.8	**213**	**46.2**	**183**	**53.8**	183	53.8	183	53.9
470.lbm	34.2	402	35.1	391	**34.3**	**400**	34.2	402	35.1	391	**34.3**	**400**
481.wrf	138	80.9	141	79.5	**140**	**79.5**	138	80.9	141	79.5	**140**	**79.5**
482.sphinx3	**246**	**79.1**	247	79.0	246	79.2	245	79.4	**246**	**79.3**	247	79.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Set Power Efficiency Mode to Custom
Set Snoop Mode to HS
Set Hyper-Threading to Disabled
Baseboard Management Controller used to adjust the fan speed to 100%
Sysinfo program /spec/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Sun May 17 15:24:43 2015
```

Continued on next page

Platform Notes (Continued)

```
This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2623 v3 @ 3.00GHz
      2 "physical id"s (chips)
      8 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 4
      siblings  : 4
      physical 0: cores 0 1 2 3
      physical 1: cores 0 1 2 3
   cache size : 10240 KB

From /proc/meminfo
   MemTotal:       263722416 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.0 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="7.0"
      PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
      ANSI_COLOR="0;31"
      CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
   redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

uname -a:
   Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
   EDT 2014 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 May 17 04:27

SPEC is set to: /spec
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda2      ext4  259G   42G  204G  17% /

Additional information from dmidecode:
  BIOS Insyde Corp. 1.16 09/02/2014
  Memory:
   8x NO DIMM NO DIMM     3 rank
   8x Samsung M393A2G40DB0-CPB 16 GB 1867 MHz 1 rank
   8x Samsung M393A2G40DB0-CPB 16 GB 1867 MHz 2 rank
```

Continued on next page

Platform Notes (Continued)

```
(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"
OMP_NUM_THREADS = "8"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RedHat EL 6.4
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
 The Huawei CH121 V3 and Huawei CH222 V3
 are electronically equivalent.
 The results have been measured on a Huawei CH121 V3 model
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
     444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    450.soplex: -DSPEC_CPU_LP64
```

Continued on next page

Base Portability Flags (Continued)

453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias -parallel

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

436.cactusADM: `basepeak = yes`

454.calculix: `-xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html`
`http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml`
`http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Oct 22 12:20:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 October 2014.