SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH8100 V3 (Intel Xeon E7-8870 v2)

SPECfp®_rate2006 = 3110

SPECfp_rate_base2006 = 3040

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Oct-2014
Hardware Availability: Feb-2014
Software Availability: Nov-2013

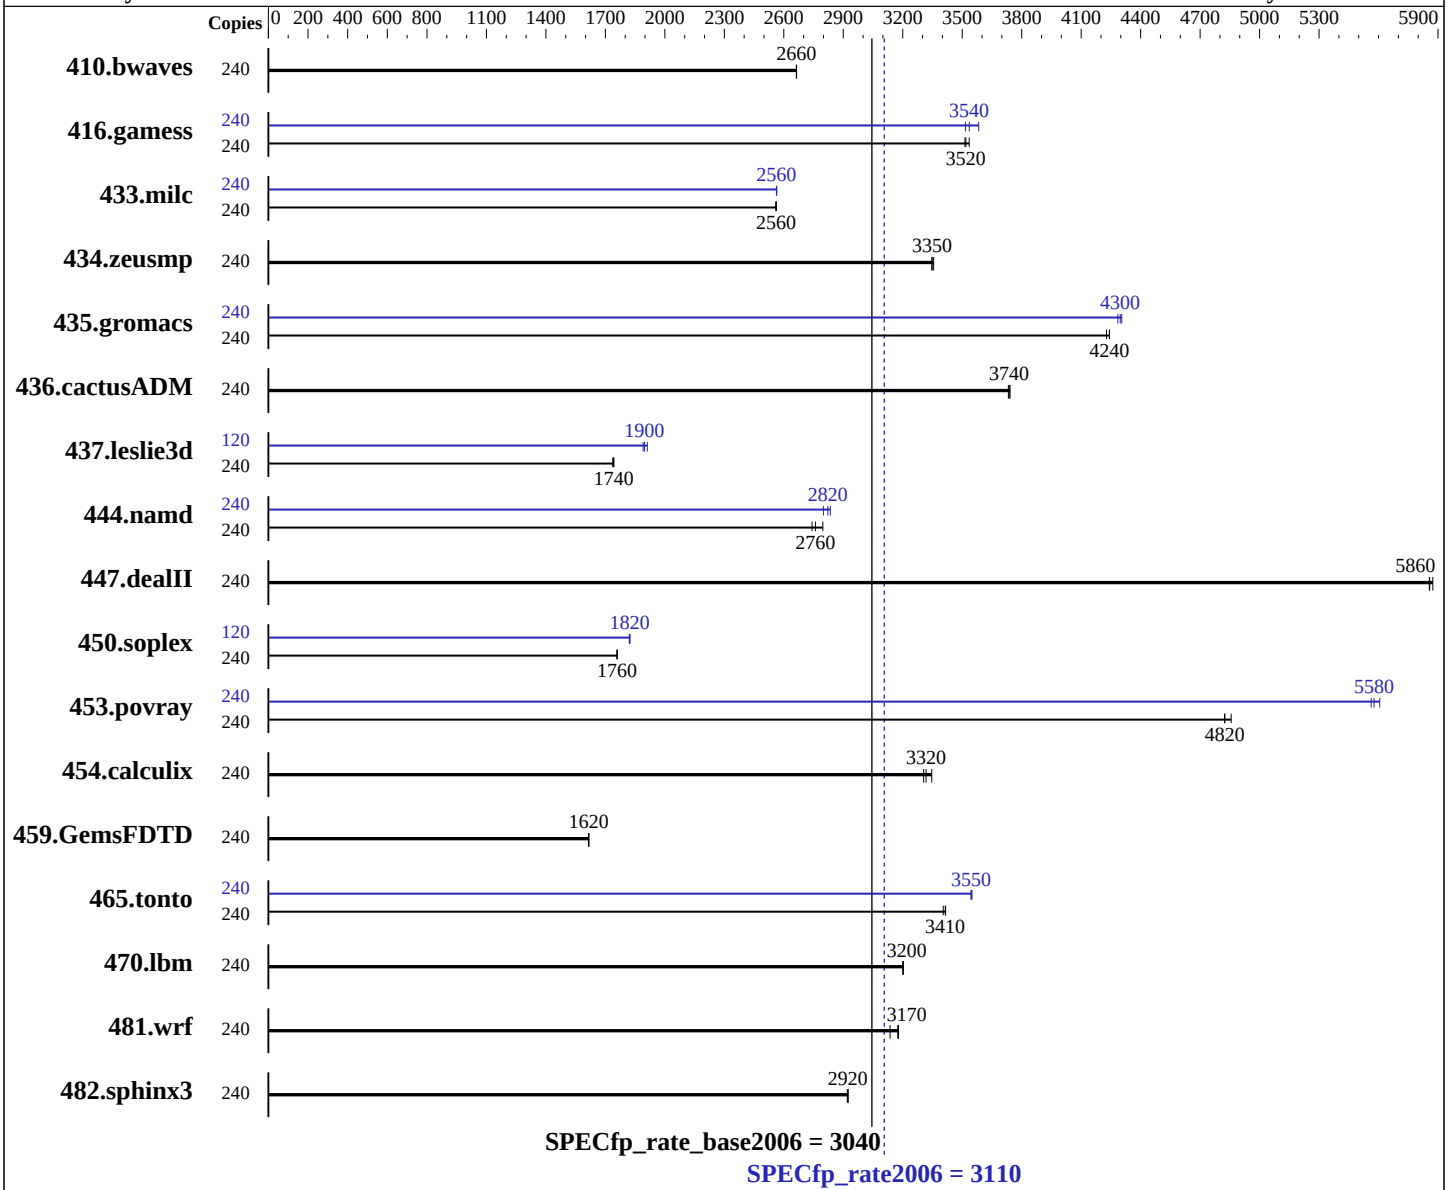

Hardware

CPU Name:	Intel Xeon E7-8870 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 2.90 GHz
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	120 cores, 8 chips, 15 cores/chip, 2 threads/core
CPU(s) orderable:	4,8 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH8100 V3 (Intel Xeon E7-8870 v2)

SPECfp_rate2006 = 3110

SPECfp_rate_base2006 = 3040

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Oct-2014
Hardware Availability: Feb-2014
Software Availability: Nov-2013

L3 Cache: 30 MB I+D on chip per chip
Other Cache: None
Memory: 1 TB (128 x 8 GB 2Rx8 PC3-12800R-11, ECC, running at 1333 MHz)
Disk Subsystem: 2 x 300 GB SAS, 10K RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	240	**1224**	**2660**	1224	2660	1225	2660	240	**1224**	**2660**	1224	2660	1225	2660
416.gamess	240	1337	3510	**1336**	**3520**	1329	3540	240	1336	3520	1311	3580	**1329**	**3540**
433.milc	240	861	2560	**860**	**2560**	860	2560	240	859	2560	860	2560	**859**	**2560**
434.zeusmp	240	652	3350	651	3360	**652**	**3350**	240	652	3350	651	3360	**652**	**3350**
435.gromacs	240	404	4240	**404**	**4240**	405	4230	240	398	4300	**399**	**4300**	400	4290
436.cactusADM	240	767	3740	**767**	**3740**	768	3730	240	767	3740	**767**	**3740**	768	3730
437.leslie3d	240	1295	1740	**1295**	**1740**	1299	1740	120	597	1890	**594**	**1900**	590	1910
444.namd	240	688	2800	702	2740	**697**	**2760**	240	**682**	**2820**	679	2830	687	2800
447.dealII	240	**469**	**5860**	469	5860	467	5870	240	**469**	**5860**	469	5860	467	5870
450.soplex	240	1137	1760	**1138**	**1760**	1138	1760	120	**549**	**1820**	549	1820	550	1820
453.povray	240	263	4860	265	4820	**265**	**4820**	240	**229**	**5580**	230	5560	228	5610
454.calculix	240	592	3350	599	3310	**597**	**3320**	240	592	3350	599	3310	**597**	**3320**
459.GemsFDTD	240	1575	1620	1577	1610	**1575**	**1620**	240	1575	1620	1577	1610	**1575**	**1620**
465.tonto	240	694	3400	**692**	**3410**	691	3420	240	665	3550	**666**	**3550**	666	3540
470.lbm	240	**1030**	**3200**	1030	3200	1030	3200	240	**1030**	**3200**	1030	3200	1030	3200
481.wrf	240	**844**	**3170**	843	3180	855	3140	240	**844**	**3170**	843	3180	855	3140
482.sphinx3	240	1602	2920	**1600**	**2920**	1599	2920	240	1602	2920	**1600**	**2920**	1599	2920

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Set Power Efficiency Mode to Performance
Set Lock_step to disabled
Baseboard Management Controller used to adjust the fan speed to 100%
C-State disabled,C6 Enabled
Adjacent Sector Prefetch Enabled
Sysinfo program /spec/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on RH8100V3 Fri Oct 17 02:26:14 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E7-8870 v2 @ 2.30GHz
      8 "physical id"s (chips)
      240 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 15
      siblings  : 30
      physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
      physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
      physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
      physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
      physical 4: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
      physical 5: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
      physical 6: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
      physical 7: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
   cache size : 30720 KB

From /proc/meminfo
   MemTotal:       1058578916 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*
   redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
   system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
   Linux RH8100V3 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
   x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Oct 16 11:51
```

Continued on next page

Platform Notes (Continued)

```
SPEC is set to: /spec
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda3      ext4  533G  230G  276G  46% /

Additional information from dmidecode:
  BIOS American Megatrends Inc. BLHSV325 09/30/2014
  Memory:
   128x   8 GB
   128x Hynix HMT41GR7AFR8C-PB 8 GB 1333 MHz 2 rank
   64x NO DIMM NO DIMM

(End of data from sysinfo program)
Regarding the sysinfo display about the memory installed, the correct amount of
memory is 1 TB and the dmidecode description should have one line reading as:
  128x Hynix HMT41GR7AFR8C-PB 8 GB 1333 MHz 2 ran
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RedHat EL 6.4
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32

Continued on next page

Peak Compiler Invocation (Continued)

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH8100 V3 (Intel Xeon E7-8870 v2)

SPECfp_rate2006 = 3110

SPECfp_rate_base2006 = 3040

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Oct-2014
Hardware Availability: Feb-2014
Software Availability: Nov-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Nov 6 13:47:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 November 2014.