# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R220 (Intel Xeon E3-1240L v3, 2.00 GHz)

SPECint®_rate2006 = 162

SPECint_rate_base2006 = 156

**CPU2006 license:** 55
**Test sponsor:** Dell Inc.
**Tested by:** Dell Inc.

**Test date:** Oct-2014
**Hardware Availability:** Mar-2014
**Software Availability:** Sep-2014

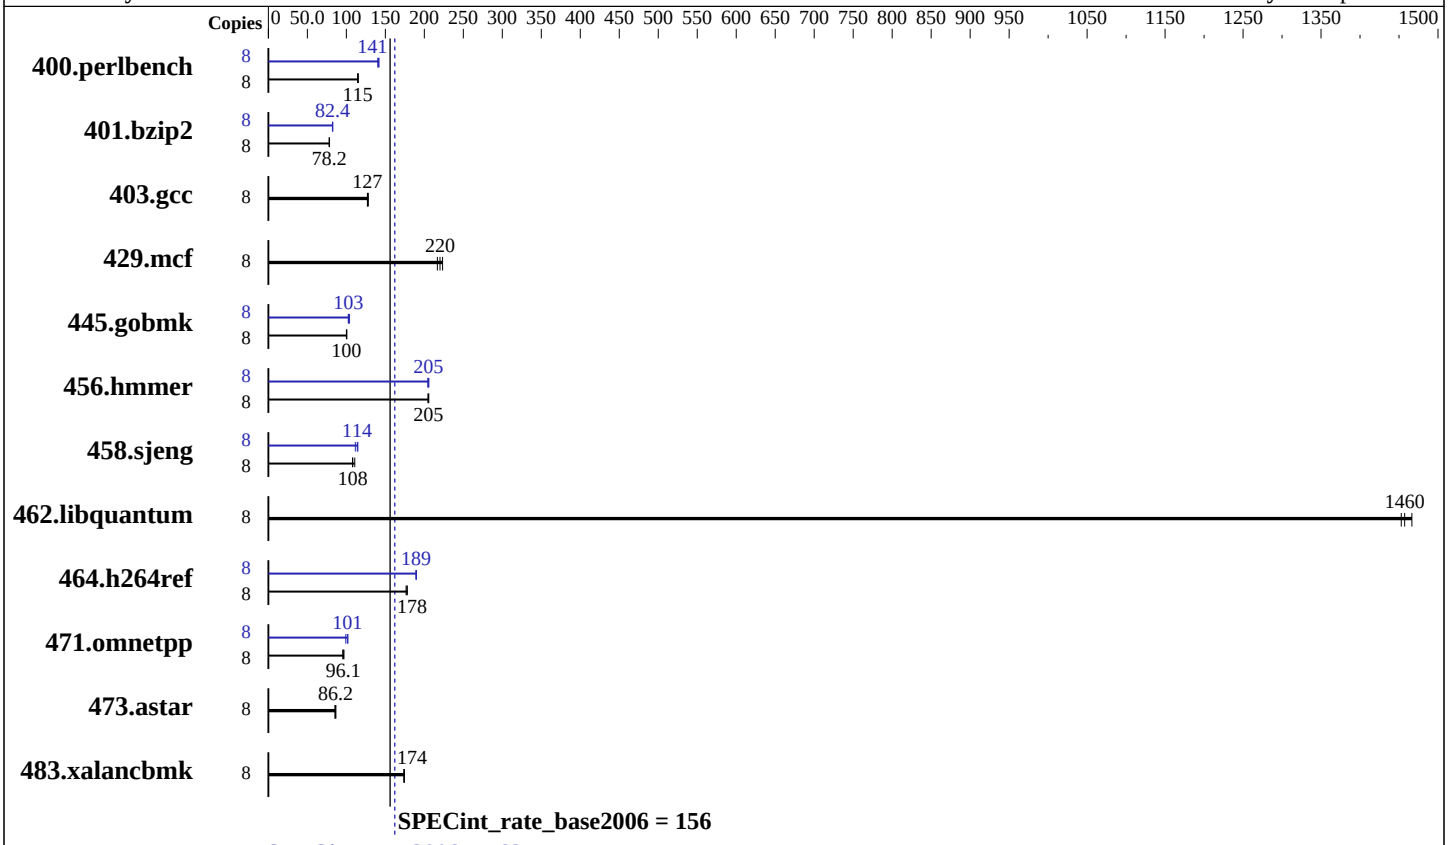


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon E3-1240L v3 |
| CPU Characteristics: | Intel Turbo Boost Technology up to 3.00 GHz |
| CPU MHz: | 2000 |
| FPU: | Integrated |
| CPU(s) enabled: | 4 cores, 1 chip, 4 cores/chip, 2 threads/core |
| CPU(s) orderable: | 1 chip |
| Primary Cache: | 32 KB I + 32 KB D on chip per core |
| Secondary Cache: | 256 KB I+D on chip per core |
| L3 Cache: | 8 MB I+D on chip per chip |
| Other Cache: | None |
| Memory: | 32 GB (4 x 8 GB 2Rx8 PC3L-12800E-11) |
| Disk Subsystem: | 1 x 300 GB 15000 RPM SAS |
| Other Hardware: | None |

## Software

| | |
|---|---|
| Operating System: | SUSE Linux Enterprise Server 11 (x86_64) 3.0.76-0.11-default |
| Compiler: | C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux |
| Auto Parallel: | No |
| File System: | ext2 |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 32-bit |
| Peak Pointers: | 32/64-bit |
| Other Software: | Microquill SmartHeap V10.0 |

# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R220 (Intel Xeon E3-1240L v3, 2.00 GHz)

SPECint_rate2006 = 162

SPECint_rate_base2006 = 156

**CPU2006 license:** 55
**Test sponsor:** Dell Inc.
**Tested by:** Dell Inc.

**Test date:** Oct-2014
**Hardware Availability:** Mar-2014
**Software Availability:** Sep-2014

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 8 | 678 | 115 | **680** | **115** | 683 | 114 | 8 | 551 | 142 | **553** | **141** | 557 | 140 |
| 401.bzip2 | 8 | 984 | 78.4 | 991 | 77.9 | **987** | **78.2** | 8 | 940 | 82.1 | **937** | **82.4** | 935 | 82.6 |
| 403.gcc | 8 | **506** | **127** | 507 | 127 | 502 | 128 | 8 | **506** | **127** | 507 | 127 | 502 | 128 |
| 429.mcf | 8 | **331** | **220** | 337 | 217 | 327 | 223 | 8 | **331** | **220** | 337 | 217 | 327 | 223 |
| 445.gobmk | 8 | 839 | 100 | **837** | **100** | 834 | 101 | 8 | 806 | 104 | **818** | **103** | 819 | 103 |
| 456.hmmer | 8 | **364** | **205** | 365 | 205 | 363 | 206 | 8 | 363 | 206 | **363** | **205** | 365 | 204 |
| 458.sjeng | 8 | 874 | 111 | **894** | **108** | 897 | 108 | 8 | 844 | 115 | 868 | 111 | **849** | **114** |
| 462.libquantum | 8 | 114 | 1450 | 113 | 1470 | **114** | **1460** | 8 | 114 | 1450 | 113 | 1470 | **114** | **1460** |
| 464.h264ref | 8 | 1002 | 177 | **996** | **178** | 994 | 178 | 8 | 932 | 190 | **935** | **189** | 935 | 189 |
| 471.omnetpp | 8 | 524 | 95.4 | 516 | 96.9 | **520** | **96.1** | 8 | 490 | 102 | **494** | **101** | 504 | 99.2 |
| 473.astar | 8 | 658 | 85.3 | **651** | **86.2** | 649 | 86.5 | 8 | 658 | 85.3 | **651** | **86.2** | 649 | 86.5 |
| 483.xalancbmk | 8 | **317** | **174** | 317 | 174 | 318 | 174 | 8 | **317** | **174** | 317 | 174 | 318 | 174 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The taskset mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate taskset commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Platform Notes

```
BIOS Configuration:
Virtualization Technology disabled
Execute Disable disabled
System Profile set to Performance
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on linux Wed Oct  8 19:13:04 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E3-1240L v3 @ 2.00GHz
      1 "physical id"s (chips)
      8 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
```

Continued on next page

## Platform Notes (Continued)

```
      following excerpts from /proc/cpuinfo might not be reliable.  Use with
      caution.)
         cpu cores : 4
         siblings  : 8
         physical 0: cores 0 1 2 3
      cache size : 8192 KB

   From /proc/meminfo
      MemTotal:       32809896 kB
      HugePages_Total:       0
      Hugepagesize:       2048 kB

   /usr/bin/lsb_release -d
      SUSE Linux Enterprise Server 11 (x86_64)

   From /etc/*release* /etc/*version*
      SuSE-release:
         SUSE Linux Enterprise Server 11 (x86_64)
         VERSION = 11
         PATCHLEVEL = 3

   uname -a:
      Linux linux 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013 (ccab990)
      x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 Oct 8 18:59 last=S

   SPEC is set to: /root/cpu2006-1.2
      Filesystem     Type  Size  Used Avail Use% Mounted on
      /dev/sda2      ext2  267G   12G  255G   5% /

   Additional information from dmidecode:
     BIOS Dell Inc. 1.3.2 09/11/2014
     Memory:
      4x Hynix/Hyundai HMT41GU7AFR8A-PB 8 GB 1600 MHz

   (End of data from sysinfo program)
```

## General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

  Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
  memory using RedHat EL 6.4
  Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

## Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

## Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

Continued on next page

## Peak Compiler Invocation (Continued)

C++ benchmarks:
icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

Continued on next page

## Peak Optimization Flags (Continued)

471.omnetpp: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

## Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html`
`http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml`
`http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.xml`


SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Nov 5 10:23:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 4 November 2014.