



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp®2006 = 94.2

ProLiant DL180 Gen9  
(1.80 GHz, Intel Xeon E5-2630L v3)

SPECfp\_base2006 = 88.7

CPU2006 license: 3


Test date: Oct-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2014

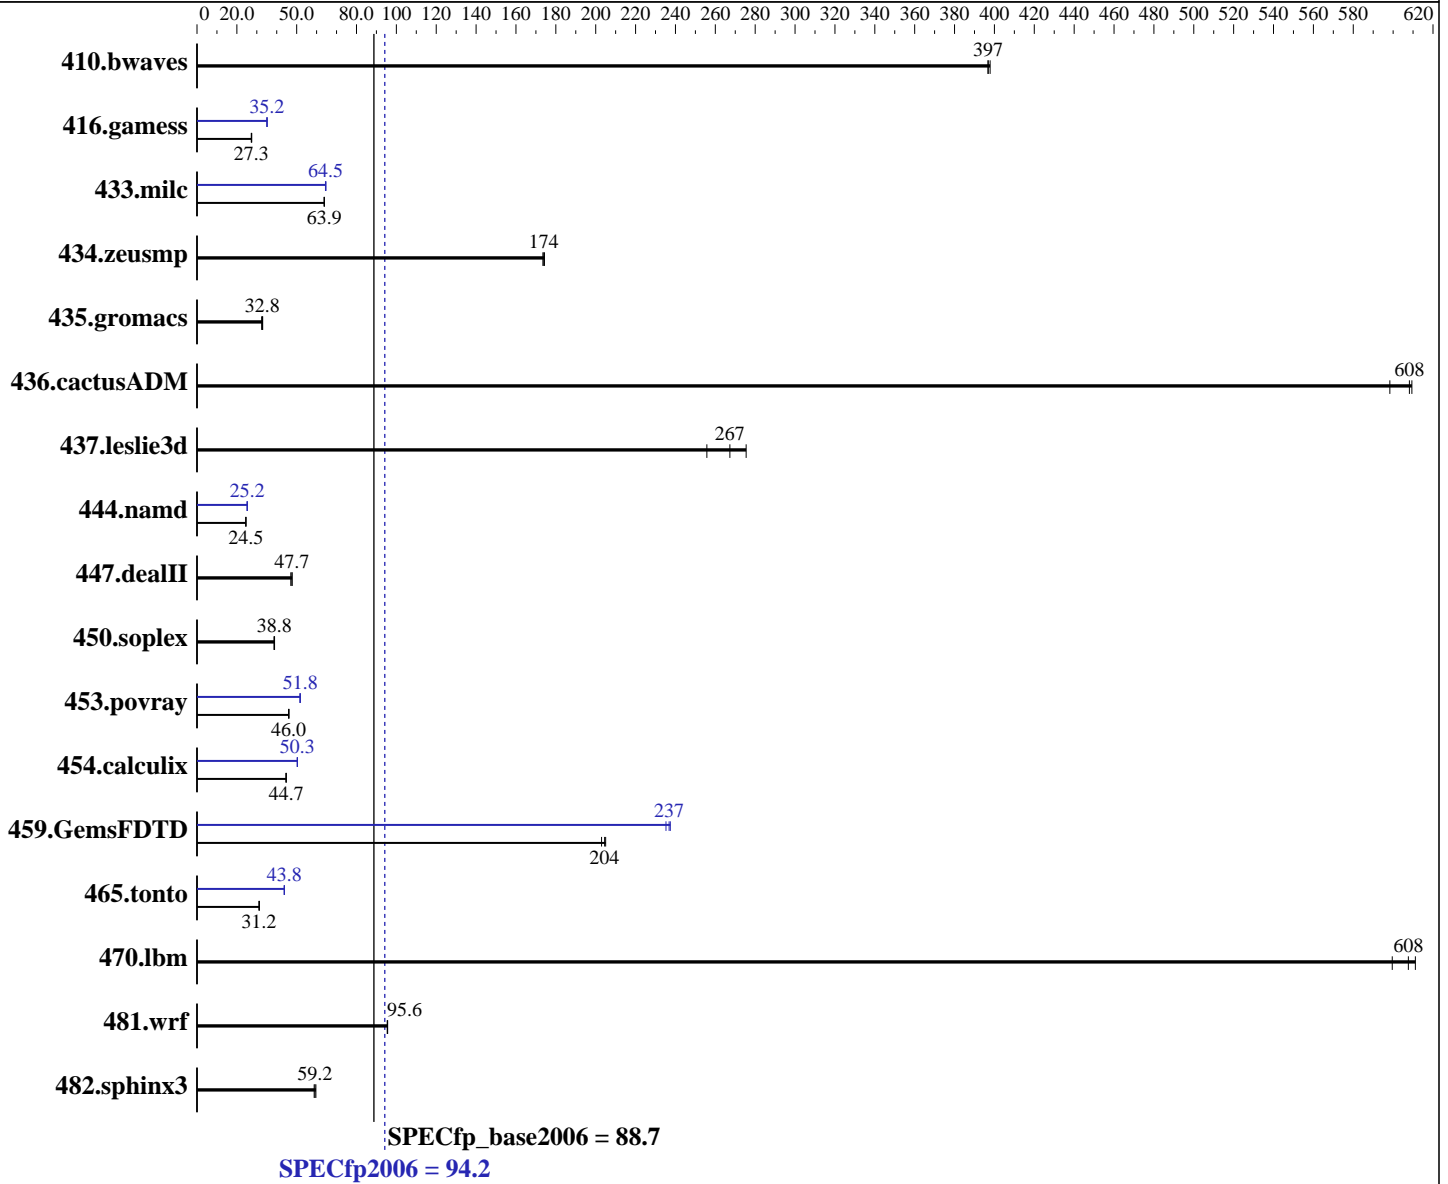

**Hardware**

CPU Name: Intel Xeon E5-2630L v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

*Continued on next page*

**Software**

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 Kernel 3.10.0-123.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: xfs

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp2006 = **94.2**

ProLiant DL180 Gen9  
(1.80 GHz, Intel Xeon E5-2630L v3)

SPECfp\_base2006 = **88.7**

<b>CPU2006 license:</b> 3	<b>Test date:</b> Oct-2014
<b>Test sponsor:</b> Hewlett-Packard Company	<b>Hardware Availability:</b> Sep-2014
<b>Tested by:</b> Hewlett-Packard Company	<b>Software Availability:</b> Sep-2014

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)  
 Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	34.2	398	34.3	397	<b>34.2</b>	<b>397</b>	34.2	398	34.3	397	<b>34.2</b>	<b>397</b>
416.gamess	718	27.3	713	27.5	<b>718</b>	<b>27.3</b>	559	35.0	<b>557</b>	<b>35.2</b>	556	35.2
433.milc	<b>144</b>	<b>63.9</b>	144	63.8	144	63.9	142	64.4	142	64.7	<b>142</b>	<b>64.5</b>
434.zeusmp	52.4	174	<b>52.3</b>	<b>174</b>	52.2	174	52.4	174	<b>52.3</b>	<b>174</b>	52.2	174
435.gromacs	220	32.4	217	32.9	<b>217</b>	<b>32.8</b>	220	32.4	217	32.9	<b>217</b>	<b>32.8</b>
436.cactusADM	<b>19.6</b>	<b>608</b>	19.6	609	20.0	598	<b>19.6</b>	<b>608</b>	19.6	609	20.0	598
437.leslie3d	36.8	256	<b>35.2</b>	<b>267</b>	34.1	275	36.8	256	<b>35.2</b>	<b>267</b>	34.1	275
444.namd	<b>327</b>	<b>24.5</b>	327	24.5	327	24.5	318	25.2	318	25.2	<b>318</b>	<b>25.2</b>
447.dealII	240	47.7	<b>240</b>	<b>47.7</b>	243	47.0	240	47.7	<b>240</b>	<b>47.7</b>	243	47.0
450.soplex	214	38.9	216	38.6	<b>215</b>	<b>38.8</b>	214	38.9	216	38.6	<b>215</b>	<b>38.8</b>
453.povray	116	46.0	<b>116</b>	<b>46.0</b>	115	46.1	103	51.6	103	51.8	<b>103</b>	<b>51.8</b>
454.calculix	184	44.8	185	44.7	<b>184</b>	<b>44.7</b>	<b>164</b>	<b>50.3</b>	164	50.3	164	50.4
459.GemsFDTD	52.3	203	<b>51.9</b>	<b>204</b>	51.8	205	<b>44.8</b>	<b>237</b>	44.7	237	45.1	235
465.tonto	315	31.3	<b>316</b>	<b>31.2</b>	316	31.1	225	43.8	<b>225</b>	<b>43.8</b>	225	43.8
470.lbm	22.5	611	<b>22.6</b>	<b>608</b>	22.9	600	22.5	611	<b>22.6</b>	<b>608</b>	22.9	600
481.wrf	117	95.6	<b>117</b>	<b>95.6</b>	117	95.4	117	95.6	<b>117</b>	<b>95.6</b>	117	95.4
482.sphinx3	332	58.8	327	59.6	<b>329</b>	<b>59.2</b>	332	58.8	327	59.6	<b>329</b>	<b>59.2</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
  echo 1 > /proc/sys/vm/drop_caches
```

## Platform Notes

```
BIOS Configuration:
Intel Hyperthreading Options set to Disabled
HP Power Profile set to Maximum Performance
QPI Snoop Configuration set to Early Snoop
Thermal Configuration set to Maximum Cooling
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

**SPECfp2006 = 94.2**

ProLiant DL180 Gen9  
(1.80 GHz, Intel Xeon E5-2630L v3)

**SPECfp\_base2006 = 88.7**

**CPU2006 license:** 3

**Test date:** Oct-2014

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2014

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2014

### Platform Notes (Continued)

Processor Power and Utilization Monitoring set to Disabled  
Memory Refresh Rate set to 1x Refresh  
Sysinfo program /home/cpu2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on kokomotop Tue Oct 7 21:56:46 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2630L v3 @ 1.80GHz
 2 "physical id"s (chips)
 16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 8
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      263715980 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

```
uname -a:
Linux kokomotop 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57 EDT 2014
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 7 21:41
```

```
SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   318G  5.8G  312G   2% /home
```

Additional information from dmidecode:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp2006 = 94.2**

ProLiant DL180 Gen9  
(1.80 GHz, Intel Xeon E5-2630L v3)

**SPECfp\_base2006 = 88.7**

**CPU2006 license:** 3

**Test date:** Oct-2014

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2014

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2014

## Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP U20 07/12/2014

Memory:

16x HP NOT AVAILABLE 16 GB 2 rank 2133 MHz, configured at 1866 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP\_NUM\_THREADS = "16"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.leslie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp2006 = 94.2**

ProLiant DL180 Gen9  
(1.80 GHz, Intel Xeon E5-2630L v3)

**SPECfp\_base2006 = 88.7**

**CPU2006 license:** 3

**Test date:** Oct-2014

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2014

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2014

## Base Portability Flags (Continued)

```

447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

```

## Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks:

```

icpc -m64

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

**SPECfp2006 = 94.2**

ProLiant DL180 Gen9  
(1.80 GHz, Intel Xeon E5-2630L v3)

**SPECfp\_base2006 = 88.7**

**CPU2006 license:** 3

**Test date:** Oct-2014

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2014

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2014

## Peak Optimization Flags

### C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

### C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

ProLiant DL180 Gen9  
(1.80 GHz, Intel Xeon E5-2630L v3)

**SPECfp2006 = 94.2**

**SPECfp\_base2006 = 88.7**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Oct-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Sep-2014

## Peak Optimization Flags (Continued)

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Nov 5 10:24:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 4 November 2014.