SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

Sugon I620-G20(Intel Xeon E5-2650 v3)

SPECint®_rate2006 = 847

SPECint_rate_base2006 = 818

CPU2006 license: 9046
Test sponsor: Sugon
Tested by: Sugon

Test date: Oct-2014
Hardware Availability: Sep-2014
Software Availability: Sep-2013

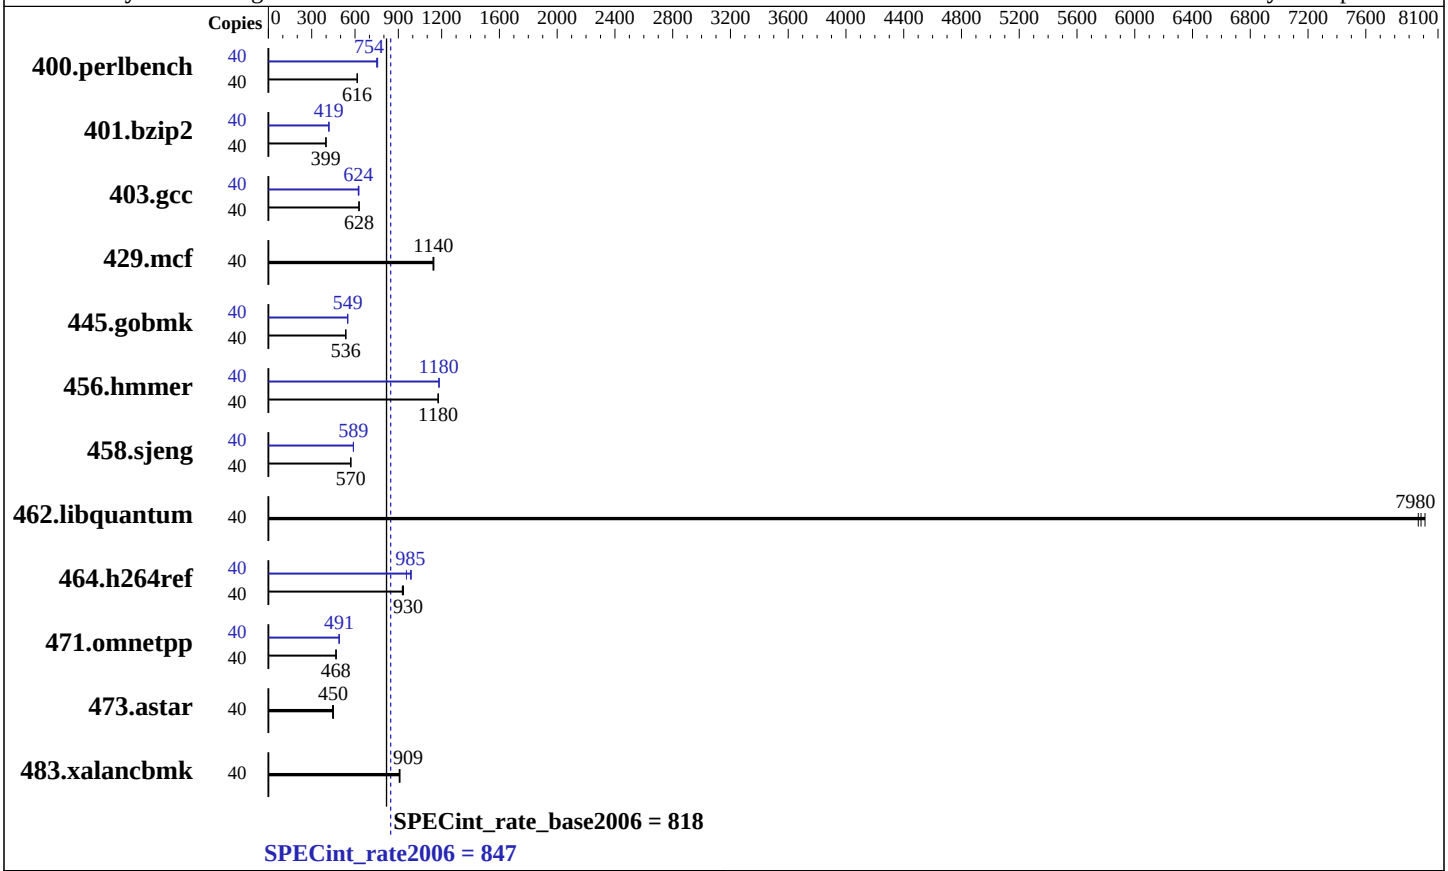

Hardware

CPU Name:	Intel Xeon E5-2650 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.00 GHz
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	20 cores, 2 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	25 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem:	1 x 2.0 TB SATA DISK
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.4 (Santiago) 2.6.32-358.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

Sugon I620-G20(Intel Xeon E5-2650 v3)

SPECint_rate2006 = 847

SPECint_rate_base2006 = 818

CPU2006 license: 9046
Test sponsor: Sugon
Tested by: Sugon

Test date: Oct-2014
Hardware Availability: Sep-2014
Software Availability: Sep-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	**635**	**616**	636	615	634	616	40	521	750	**519**	**754**	516	757
401.bzip2	40	**968**	**399**	968	399	968	399	40	921	419	**921**	**419**	922	419
403.gcc	40	**512**	**628**	514	627	512	629	40	**516**	**624**	513	627	517	622
429.mcf	40	320	1140	318	1150	**319**	**1140**	40	320	1140	318	1150	**319**	**1140**
445.gobmk	40	**783**	**536**	784	535	782	537	40	764	549	764	549	**764**	**549**
456.hmmer	40	317	1180	318	1180	**317**	**1180**	40	**316**	**1180**	316	1180	316	1180
458.sjeng	40	**849**	**570**	849	570	847	571	40	**822**	**589**	822	589	822	589
462.libquantum	40	103	8010	**104**	**7980**	104	7960	40	103	8010	**104**	**7980**	104	7960
464.h264ref	40	**952**	**930**	954	927	946	936	40	894	990	926	956	**899**	**985**
471.omnetpp	40	**534**	**468**	534	468	532	470	40	**510**	**491**	511	489	509	491
473.astar	40	624	450	**625**	**450**	631	445	40	624	450	**625**	**450**	631	445
483.xalancbmk	40	**304**	**909**	305	906	303	911	40	**304**	**909**	305	906	303	911

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Enforce POR set to disabled
Memory Frequency set to 2133
Early Snoop set to disabled
COD set to enable
Power Technology set to performance
 Sysinfo program /home/cpu2006/config/sysinfo.rev6874
 $Rev: 6874 $ $Date:: 2013-11-20 #$ 654bd3fcf53b06faef0efe54ed011998
 running on localhost Wed Oct 22 08:12:15 2014

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2650 v3 @ 2.30GHz
       2 "physical id"s (chips)
       40 "processors"
```

Continued on next page

Platform Notes (Continued)

```
      cores, siblings (Caution: counting these is hw and system dependent.  The
      following excerpts from /proc/cpuinfo might not be reliable.  Use with
      caution.)
         cpu cores : 10
         siblings  : 20
         physical 0: cores 0 1 2 3 4 8 9 10 11 12
         physical 1: cores 0 1 2 3 4 8 9 10 11 12
      cache size : 12800 KB

   From /proc/meminfo
      MemTotal:       264477868 kB
      HugePages_Total:       0
      Hugepagesize:       2048 kB

   /usr/bin/lsb_release -d
      Red Hat Enterprise Linux Server release 6.4 (Santiago)

   From /etc/*release* /etc/*version*
      redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
      system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
      system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

   uname -a:
      Linux localhost 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
      x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 Oct 20 15:12

   SPEC is set to: /home/cpu2006
      Filesystem     Type    Size  Used Avail Use% Mounted on
      /dev/sda3      ext4    1.8T  446G  1.3T  26% /
   Additional information from dmidecode:

      Warning: Use caution when you interpret this section. The 'dmidecode' program
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

     BIOS American Megatrends Inc. 067 08/13/2014
     Memory:
      8x NO DIMM NO DIMM
      16x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz

   (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

  Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
```

Continued on next page

General Notes (Continued)

```
 memory using RedHat EL 6.4
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>

Submitted_by: Tian Yuwan <tianyw@sugon.com>
Submitted: Wed Nov  5 03:41:05 EST 2014
Submission: cpu2006-20141023-32565.sub
```

Base Compiler Invocation

C benchmarks:
```
icc  -m32
```

C++ benchmarks:
```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3
```

C++ benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html
http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-HSW-revA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml
http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-HSW-revA.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Nov 18 16:32:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 November 2014.