SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6028R-TR
(X10DRi , Intel Xeon E5-2695 v3)

SPECint®_rate2006 = 1130

SPECint_rate_base2006 = 1090

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Oct-2014
Hardware Availability: Sep-2014
Software Availability: Sep-2014

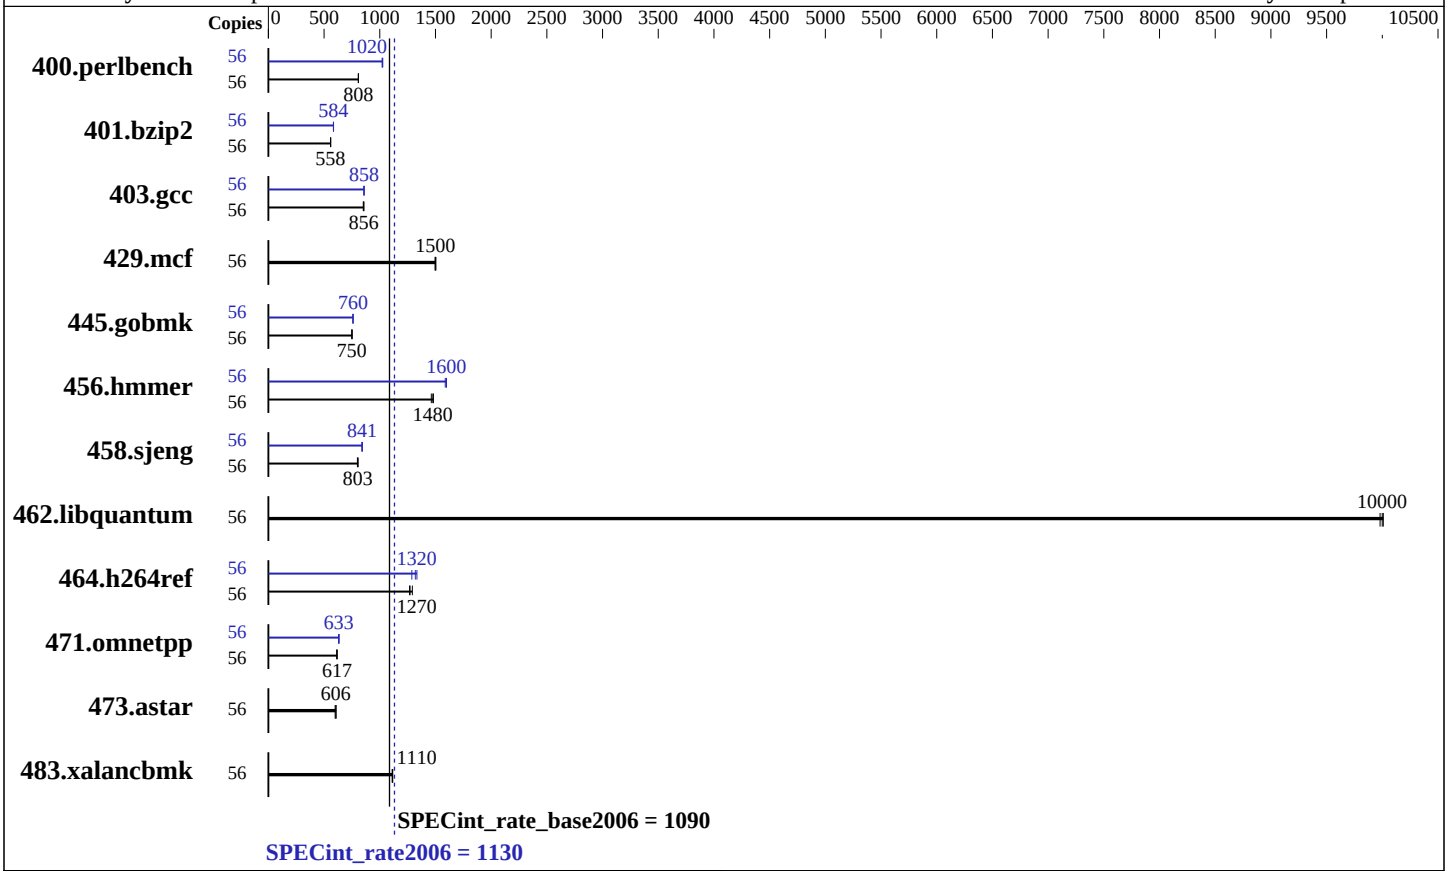

Hardware

CPU Name:	Intel Xeon E5-2695 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	28 cores, 2 chips, 14 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	35 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem:	1 x 2000 GB SATA III, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.0, Kernel 3.10.0-123.e17.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6028R-TR
(X10DRi , Intel Xeon E5-2695 v3)

SPECint_rate2006 = 1130

SPECint_rate_base2006 = 1090

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Oct-2014
Hardware Availability: Sep-2014
Software Availability: Sep-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	56	**677**	**808**	676	809	678	807	56	533	1030	535	1020	**535**	**1020**
401.bzip2	56	965	560	969	558	**968**	**558**	56	925	584	**925**	**584**	924	585
403.gcc	56	529	852	526	857	**526**	**856**	56	525	859	525	858	**525**	**858**
429.mcf	56	340	1500	341	1500	**341**	**1500**	56	340	1500	341	1500	**341**	**1500**
445.gobmk	56	782	752	784	749	**783**	**750**	56	774	759	**773**	**760**	773	760
456.hmmer	56	**354**	**1480**	357	1460	353	1480	56	329	1590	**327**	**1600**	327	1600
458.sjeng	56	**843**	**803**	848	799	842	805	56	806	840	803	844	**806**	**841**
462.libquantum	56	**116**	**10000**	116	9980	116	10000	56	**116**	**10000**	116	9980	116	10000
464.h264ref	56	**974**	**1270**	959	1290	978	1270	56	**940**	**1320**	962	1290	929	1330
471.omnetpp	56	567	617	571	613	**568**	**617**	56	552	634	**553**	**633**	555	630
473.astar	56	647	607	**649**	**606**	656	599	56	647	607	**649**	**606**	656	599
483.xalancbmk	56	346	1120	348	1110	**347**	**1110**	56	346	1120	348	1110	**347**	**1110**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
COD Enable = Enable
Early Snoop = Disable
Enforce POR = Disable
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/Trial/SPEC2K6/SPEC2006-V12/libs/32:/home/Trial/SPEC2K6/SPEC2006-V12/libs/64:/home/Trial/SPEC2K6/SPEC2006-V12/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
memory using RedHat EL 7.0
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1>       /proc/sys/vm/drop_caches
```

Continued on next page

General Notes (Continued)

```
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

C++ benchmarks:
```
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3
```

C++ benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

Continued on next page

Peak Compiler Invocation (Continued)

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revE.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revE.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Dec 4 10:08:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 December 2014.