SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

IBM NeXtScale nx360 M4
(Intel Xeon E5-2609 v2, 2.50 GHz)

SPECfp®_rate2006 = 256

SPECfp_rate_base2006 = 251

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: IBM Corporation

Test date: Nov-2014
Hardware Availability: Nov-2013
Software Availability: Sep-2013

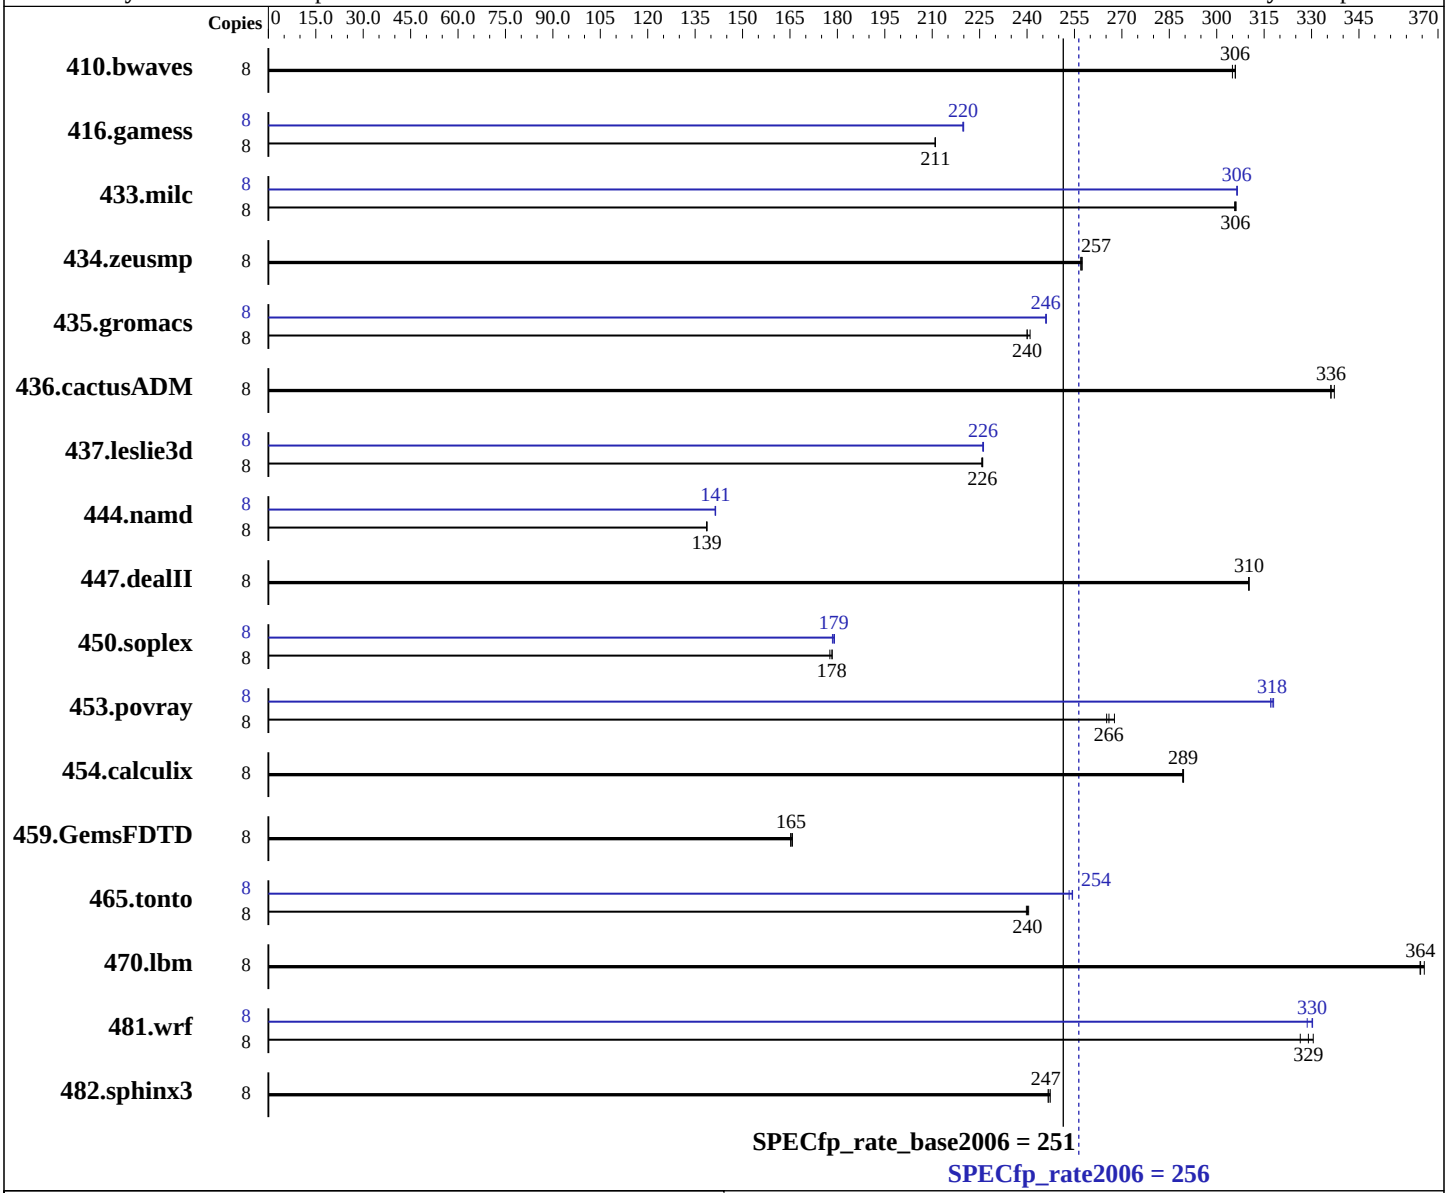

Hardware

CPU Name:	Intel Xeon E5-2609 v2
CPU Characteristics:	
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.4 (Santiago) 2.6.32-358.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

IBM NeXtScale nx360 M4
(Intel Xeon E5-2609 v2, 2.50 GHz)

SPECfp_rate2006 = 256

SPECfp_rate_base2006 = 251

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: IBM Corporation

Test date: Nov-2014
Hardware Availability: Nov-2013
Software Availability: Sep-2013

L3 Cache: 10 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (8 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1333 MHz)
Disk Subsystem: 2 x 250 GB SATA, 7200RPM, RAID 0
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	355	306	356	305	**355**	**306**	8	355	306	356	305	**355**	**306**
416.gamess	8	**742**	**211**	743	211	742	211	8	712	220	**713**	**220**	713	220
433.milc	8	**240**	**306**	240	306	240	306	8	240	306	**240**	**306**	240	307
434.zeusmp	8	283	257	283	257	**283**	**257**	8	283	257	283	257	**283**	**257**
435.gromacs	8	237	241	**238**	**240**	238	240	8	232	246	232	246	**232**	**246**
436.cactusADM	8	**284**	**336**	284	337	284	336	8	**284**	**336**	284	337	284	336
437.leslie3d	8	333	226	**333**	**226**	333	226	8	333	226	332	226	**333**	**226**
444.namd	8	462	139	463	139	**463**	**139**	8	453	141	454	141	**454**	**141**
447.dealII	8	**295**	**310**	295	310	295	310	8	**295**	**310**	295	310	295	310
450.soplex	8	374	178	**374**	**178**	376	178	8	373	179	374	178	**373**	**179**
453.povray	8	160	265	**160**	**266**	159	268	8	134	318	**134**	**318**	134	317
454.calculix	8	228	289	228	290	**228**	**289**	8	228	289	228	290	**228**	**289**
459.GemsFDTD	8	512	166	**513**	**165**	514	165	8	512	166	**513**	**165**	514	165
465.tonto	8	**328**	**240**	328	240	327	241	8	**310**	**254**	309	254	311	253
470.lbm	8	302	364	301	366	**302**	**364**	8	302	364	301	366	**302**	**364**
481.wrf	8	274	326	270	331	**272**	**329**	8	**271**	**330**	271	330	272	329
482.sphinx3	8	630	247	632	247	**632**	**247**	8	630	247	632	247	**632**	**247**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Zone reclaim mode enabled with:
echo 1 > /proc/sys/vm/zone_reclaim_mode
Intel Idle Driver disabled with the following Linux kernel parameter in /etc/grub.conf:
intel_idle.max_cstate=0
```

Platform Notes

```
BIOS setting:
Operating Mode set to Maximum Performance
Sysinfo program /home/SPECcpu-20140116-ic14.0/config/sysinfo.rev6874
$Rev: 6874 $ $Date:: 2013-11-20 #$ 654bd3fcf53b06faef0efe54ed011998
running on nx360M4 Sun Nov  2 18:54:25 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2609 v2 @ 2.50GHz
      2 "physical id"s (chips)
      8 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 4
      siblings  : 4
      physical 0: cores 0 1 2 3
      physical 1: cores 0 1 2 3
   cache size : 10240 KB

From /proc/meminfo
   MemTotal:       132091120 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Red Hat Enterprise Linux Server release 6.4 (Santiago)

From /etc/*release* /etc/*version*
   redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
   system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
   Linux nx360M4 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
   x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Oct 31 12:28

SPEC is set to: /home/SPECcpu-20140116-ic14.0
   Filesystem     Type    Size  Used Avail Use% Mounted on
   /dev/mapper/vg_nx360m4-lv_home
                  ext4    403G   14G  370G   4% /home
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.
```

Continued on next page

Platform Notes (Continued)

```
    BIOS IBM -[FHE107NUS-1.20]- 06/03/2014
    Memory:
     8x Samsung M393B2G70QH0-CMA 16 GB 2 rank 1866 MHz, configured at 1333 MHz

  (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/home/SPECcpu-20140116-ic14.0/libs/32:/home/SPECcpu-20140116-ic14.0/libs/64:/home/SPECcpu-20140116-ic14.0/sh"

  Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
  memory using RedHat EL 6.4
  Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
  Filesystem page cache cleared with:
  echo 1>       /proc/sys/vm/drop_caches
  runspec command invoked through numactl i.e.:
  numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
     icc   -m64
```

C++ benchmarks:
```
     icpc  -m64
```

Fortran benchmarks:
```
     ifort -m64
```

Benchmarks using both Fortran and C:
```
     icc   -m64 ifort -m64
```

Base Portability Flags

```
      410.bwaves: -DSPEC_CPU_LP64
      416.gamess: -DSPEC_CPU_LP64
        433.milc: -DSPEC_CPU_LP64
      434.zeusmp: -DSPEC_CPU_LP64
     435.gromacs: -DSPEC_CPU_LP64 -nofor_main
  436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
     437.leslie3d: -DSPEC_CPU_LP64
       444.namd: -DSPEC_CPU_LP64
     447.dealII: -DSPEC_CPU_LP64
```

Continued on next page

Base Portability Flags (Continued)

450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-C.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-C.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Dec 3 10:29:56 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 December 2014.