SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M1, Intel Xeon E5-2630 v3, 2.4 GHz

SPECfp®_rate2006 = 577

SPECfp_rate_base2006 = 563

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Oct-2014
Hardware Availability: Sep-2014
Software Availability: Sep-2014

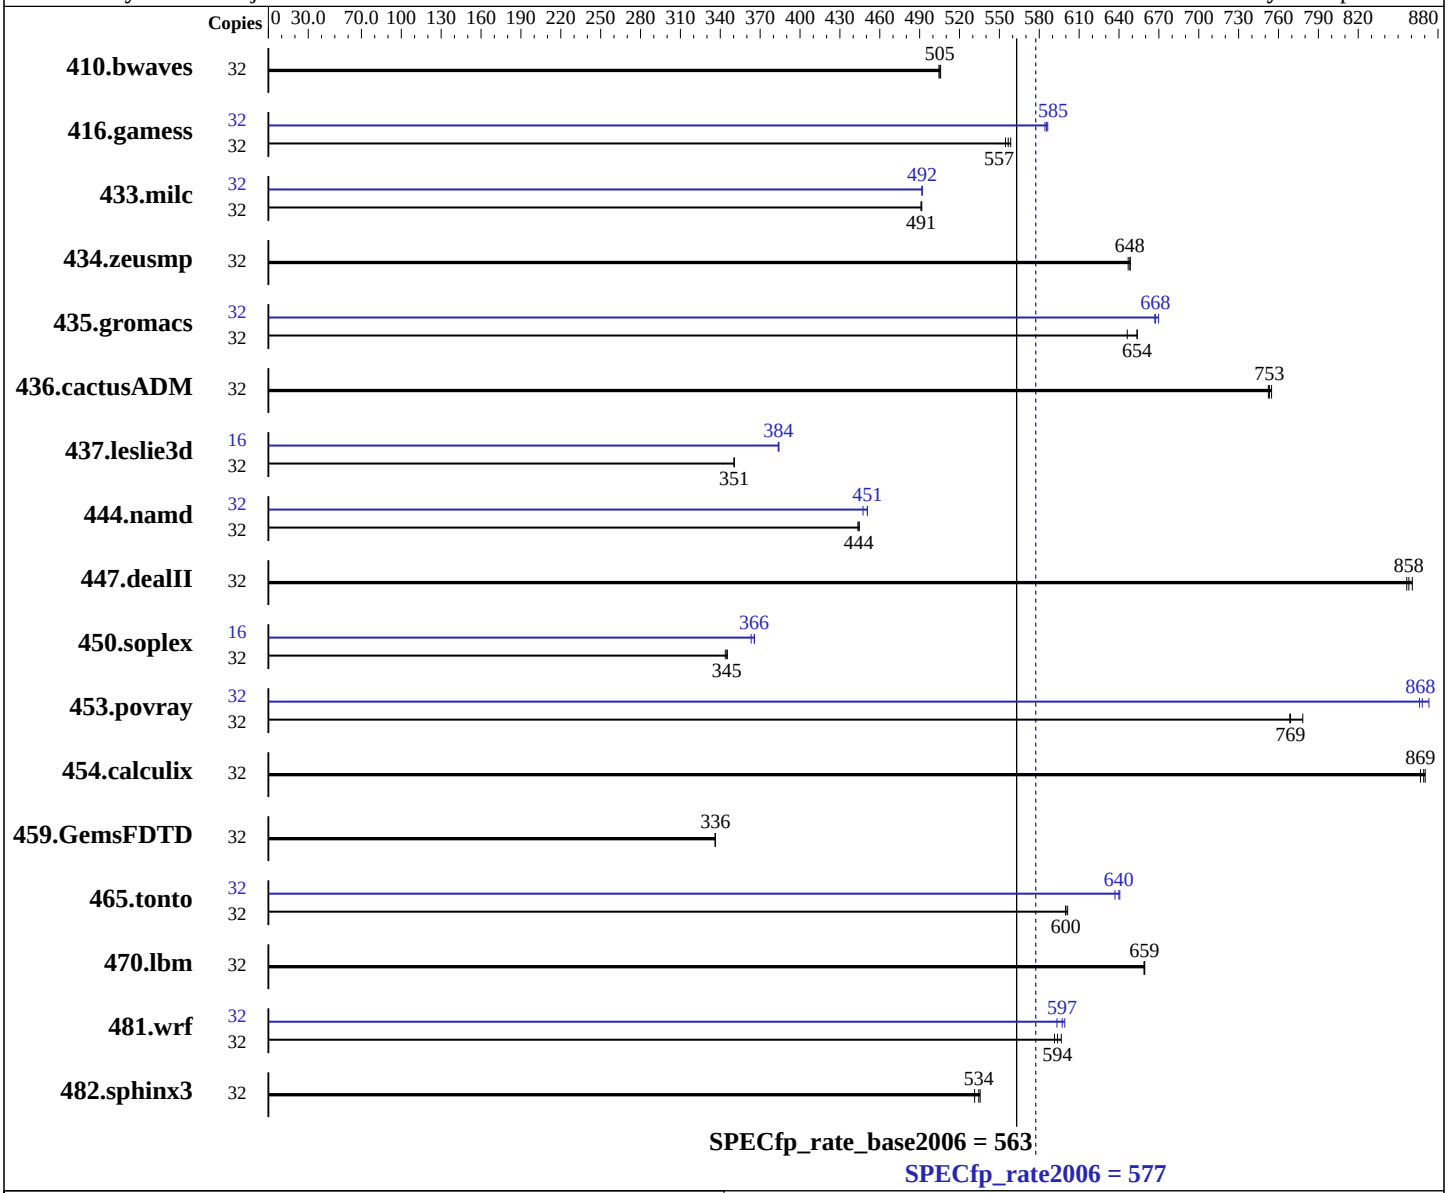

Hardware

CPU Name:	Intel Xeon E5-2630 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.20 GHz
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.0 (Maipo) Kernel 3.10.0-123.8.1.el7.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux; Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	xfs

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540 M1, Intel Xeon E5-2630 v3, 2.4 GHz

SPECfp_rate2006 = 577

SPECfp_rate_base2006 = 563

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Oct-2014
Hardware Availability: Sep-2014
Software Availability: Sep-2014

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)
Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	862	505	**861**	**505**	860	506	32	862	505	**861**	**505**	860	506
416.gamess	32	1122	559	1130	555	**1126**	**557**	32	**1070**	**585**	1069	586	1072	584
433.milc	32	598	491	598	492	**598**	**491**	32	597	492	597	492	**597**	**492**
434.zeusmp	32	449	648	450	647	**449**	**648**	32	449	648	450	647	**449**	**648**
435.gromacs	32	350	654	**350**	**654**	354	646	32	**342**	**668**	341	670	343	667
436.cactusADM	32	508	752	**508**	**753**	507	755	32	508	752	**508**	**753**	507	755
437.leslie3d	32	858	351	859	350	**858**	**351**	16	392	384	**392**	**384**	392	384
444.namd	32	577	445	**578**	**444**	579	444	32	569	451	574	447	**569**	**451**
447.dealII	32	427	856	425	861	**427**	**858**	32	427	856	425	861	**427**	**858**
450.soplex	32	773	345	776	344	**774**	**345**	16	**365**	**366**	367	363	365	366
453.povray	32	**221**	**769**	222	768	219	778	32	**196**	**868**	197	866	195	873
454.calculix	32	**304**	**869**	305	867	303	870	32	**304**	**869**	305	867	303	870
459.GemsFDTD	32	1010	336	1009	336	**1009**	**336**	32	1010	336	1009	336	**1009**	**336**
465.tonto	32	525	600	**525**	**600**	524	601	32	494	637	**492**	**640**	492	641
470.lbm	32	667	659	**667**	**659**	667	659	32	667	659	**667**	**659**	667	659
481.wrf	32	599	597	604	591	**602**	**594**	32	602	593	597	599	**598**	**597**
482.sphinx3	32	1165	536	**1167**	**534**	1174	531	32	1165	536	**1167**	**534**	1174	531

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Energy Performance = Performance
Utilization Profile = Unbalanced
```

Continued on next page

Platform Notes (Continued)

```
QPI snoop mode: Cluster on Die
    COD Enable = Enabled, Early Snoop = Disabled
CPU C1E Support = Disabled
QPI Link Frequency Select = 6.4 GT/s
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/SPECcpu2006/libs/32:/home/SPECcpu2006/libs/64:/home/SPECcpu2006/sh"

 Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
 memory using RedHat EL 7.0
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>

 For information about Fujitsu please visit: http://www.fujitsu.com
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
   435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
   437.leslie3d: -DSPEC_CPU_LP64
     444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
```

Continued on next page

Base Portability Flags (Continued)

454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

Continued on next page

Peak Portability Flags (Continued)

416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Haswell-EP.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Haswell-EP.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Dec 16 13:11:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 December 2014.