SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x iDataPlex dx360 M4
(Intel Xeon E5-2620 v2, 2.10 GHz)

SPECfp®_rate2006 = 386

SPECfp_rate_base2006 = 378

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: IBM Corporation

Test date: Nov-2014
Hardware Availability: Dec-2013
Software Availability: Sep-2013

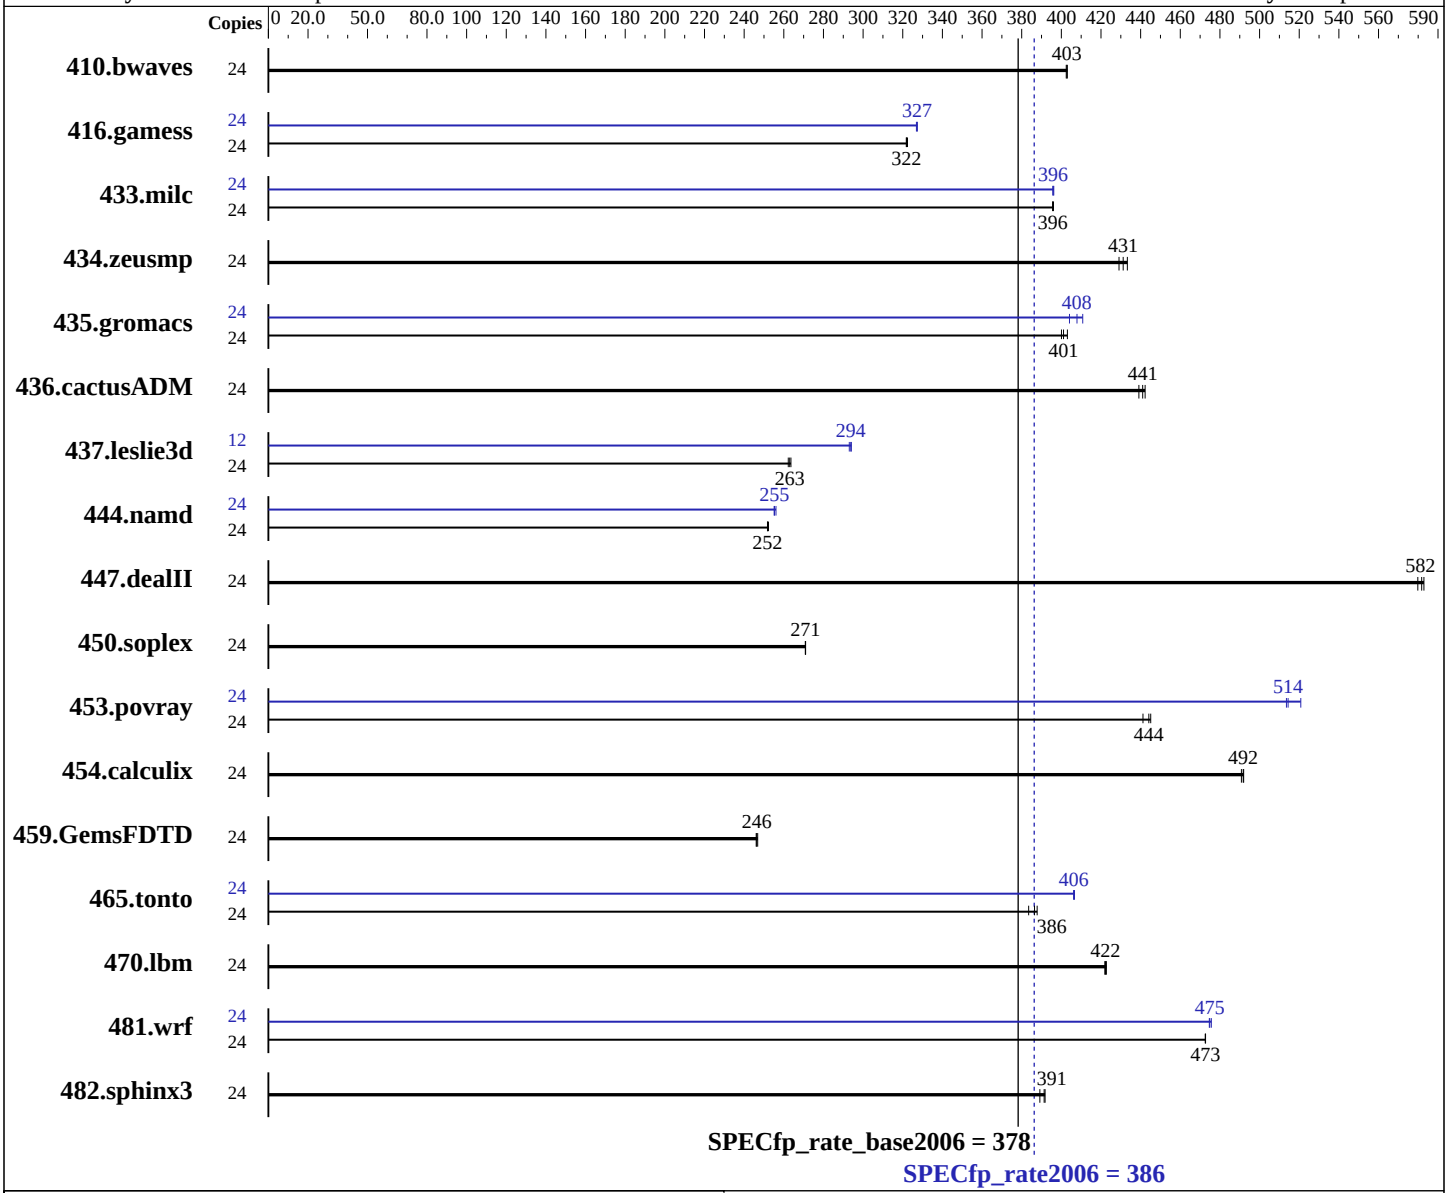

Hardware

CPU Name:	Intel Xeon E5-2620 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 2.60 GHz
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.4 (Santiago) 2.6.32-358.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x iDataPlex dx360 M4
(Intel Xeon E5-2620 v2, 2.10 GHz)

SPECfp_rate2006 = 386

SPECfp_rate_base2006 = 378

CPU2006 license: 9017
Test sponsor: Lenovo Group Limited
Tested by: IBM Corporation

Test date: Nov-2014
Hardware Availability: Dec-2013
Software Availability: Sep-2013

L3 Cache: 15 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1600 MHz)
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	809	403	**810**	**403**	810	402	24	809	403	**810**	**403**	810	402
416.gamess	24	1460	322	1458	322	**1460**	**322**	24	1436	327	1438	327	**1436**	**327**
433.milc	24	**557**	**396**	556	396	557	396	24	556	396	557	396	**556**	**396**
434.zeusmp	24	**506**	**431**	504	433	509	429	24	**506**	**431**	504	433	509	429
435.gromacs	24	**427**	**401**	428	400	425	403	24	417	411	**420**	**408**	424	404
436.cactusADM	24	**650**	**441**	648	442	653	439	24	**650**	**441**	648	442	653	439
437.leslie3d	24	860	262	**858**	**263**	856	264	12	**384**	**294**	384	294	385	293
444.namd	24	**764**	**252**	763	252	765	252	24	**754**	**255**	754	255	752	256
447.dealII	24	474	580	**472**	**582**	471	583	24	474	580	**472**	**582**	471	583
450.soplex	24	739	271	**739**	**271**	739	271	24	739	271	**739**	**271**	739	271
453.povray	24	**287**	**444**	289	441	287	445	24	**248**	**514**	245	521	249	514
454.calculix	24	**403**	**492**	402	492	403	491	24	**403**	**492**	402	492	403	491
459.GemsFDTD	24	1032	247	1035	246	**1034**	**246**	24	1032	247	1035	246	**1034**	**246**
465.tonto	24	**611**	**386**	609	388	616	384	24	581	407	581	406	**581**	**406**
470.lbm	24	**781**	**422**	782	422	780	423	24	**781**	**422**	782	422	780	423
481.wrf	24	**567**	**473**	567	473	567	473	24	565	475	564	476	**565**	**475**
482.sphinx3	24	1194	392	1202	389	**1195**	**391**	24	1194	392	1202	389	**1195**	**391**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Zone reclaim mode enabled with:
echo 1 > /proc/sys/vm/zone_reclaim_mode
Intel Idle Driver disabled with the following Linux kernel parameter in /etc/grub.conf:
intel_idle.max_cstate=0
```

Platform Notes

```
BIOS setting:
Operating Mode set to Maximum Performance
Sysinfo program /home/SPECcpu-20140116-ic14.0/config/sysinfo.rev6874
$Rev: 6874 $ $Date:: 2013-11-20 #$ 654bd3fcf53b06faef0efe54ed011998
running on dx360M4 Tue Nov 18 07:42:04 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2620 v2 @ 2.10GHz
      2 "physical id"s (chips)
      24 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 6
      siblings  : 12
      physical 0: cores 0 1 2 3 4 5
      physical 1: cores 0 1 2 3 4 5
   cache size : 15360 KB

From /proc/meminfo
   MemTotal:       264642460 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Red Hat Enterprise Linux Server release 6.4 (Santiago)

From /etc/*release* /etc/*version*
   redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
   system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
   Linux dx360M4 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
   x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Nov 17 15:39

SPEC is set to: /home/SPECcpu-20140116-ic14.0
   Filesystem     Type    Size  Used Avail Use% Mounted on
   /dev/mapper/vg_td2-lv_home
                  ext4    380G  174G  187G  49% /home
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.
```

Continued on next page

Platform Notes (Continued)

```
    BIOS IBM -[TDE139OUS-1.50]- 02/21/2014
    Memory:
     16x Samsung M393B2G70QH0-CMA 16 GB 2 rank 1866 MHz, configured at 1600 MHz

  (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/home/SPECcpu-20140116-ic14.0/libs/32:/home/SPECcpu-20140116-ic14.0/libs/64:/home/SPECcpu-20140116-ic14.0/sh"

  Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
  memory using RedHat EL 6.4
  Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
  Filesystem page cache cleared with:
  echo 1>       /proc/sys/vm/drop_caches
  runspec command invoked through numactl i.e.:
  numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
     icc   -m64
```

C++ benchmarks:
```
     icpc  -m64
```

Fortran benchmarks:
```
     ifort -m64
```

Benchmarks using both Fortran and C:
```
     icc   -m64 ifort -m64
```

Base Portability Flags

```
      410.bwaves: -DSPEC_CPU_LP64
      416.gamess: -DSPEC_CPU_LP64
        433.milc: -DSPEC_CPU_LP64
      434.zeusmp: -DSPEC_CPU_LP64
     435.gromacs: -DSPEC_CPU_LP64 -nofor_main
  436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
     437.leslie3d: -DSPEC_CPU_LP64
       444.namd: -DSPEC_CPU_LP64
      447.dealII: -DSPEC_CPU_LP64
```

Continued on next page

Base Portability Flags (Continued)

450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

454.calculix: `basepeak = yes`

481.wrf: `-xAVX -ipo -O3 -no-prec-div -auto-ilp32`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html`
`http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-C.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml`
`http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-C.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Dec 30 16:10:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 30 December 2014.