



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp®2006 = **75.6**

Lenovo System x iDataPlex dx360 M4
(Intel Xeon E5-2620 v2, 2.10 GHz)

SPECfp_base2006 = **73.0**

CPU2006 license: 9017


Test date: Nov-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

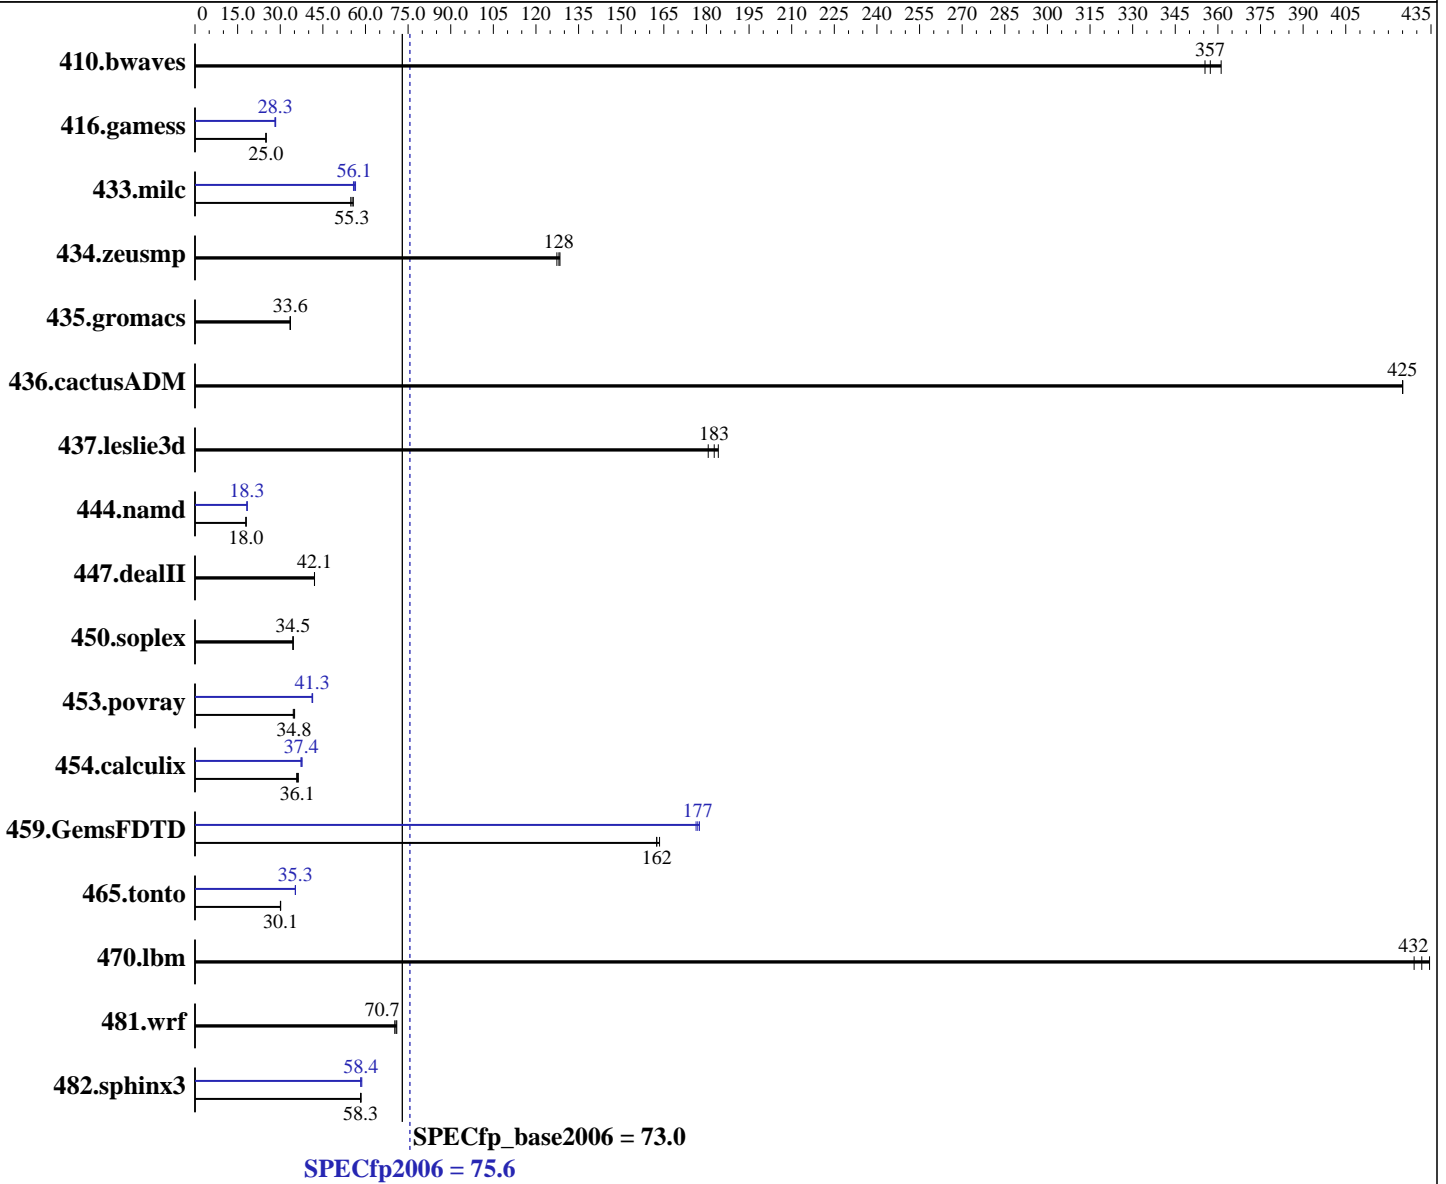

Hardware	
CPU Name:	Intel Xeon E5-2620 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 2.60 GHz
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software	
Operating System:	Red Hat Enterprise Linux Server release 6.4 (Santiago)
Compiler:	2.6.32-358.el6.x86_64 C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = **75.6**

Lenovo System x iDataPlex dx360 M4
(Intel Xeon E5-2620 v2, 2.10 GHz)

SPECfp_base2006 = **73.0**

CPU2006 license: 9017

Test date: Nov-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

L3 Cache: 15 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1600 MHz)
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	38.0	357	38.2	355	37.6	361	38.0	357	38.2	355	37.6	361
416.gamess	782	25.0	783	25.0	785	25.0	690	28.4	693	28.3	695	28.2
433.milc	166	55.3	167	54.8	165	55.7	164	56.1	162	56.5	165	55.8
434.zeusmp	71.0	128	70.8	128	71.4	127	71.0	128	70.8	128	71.4	127
435.gromacs	213	33.5	213	33.6	213	33.6	213	33.5	213	33.6	213	33.6
436.cactusADM	28.1	425	28.1	425	28.1	425	28.1	425	28.1	425	28.1	425
437.leslie3d	51.4	183	51.0	184	52.0	181	51.4	183	51.0	184	52.0	181
444.namd	446	18.0	445	18.0	448	17.9	438	18.3	437	18.3	438	18.3
447.dealII	272	42.1	272	42.1	272	42.0	272	42.1	272	42.1	272	42.0
450.soplex	242	34.5	242	34.5	241	34.5	242	34.5	242	34.5	241	34.5
453.povray	153	34.8	154	34.6	152	35.1	129	41.2	129	41.3	128	41.4
454.calculix	227	36.4	231	35.8	229	36.1	220	37.4	219	37.7	221	37.3
459.GemsFDTD	65.3	162	65.3	162	64.9	164	60.2	176	59.8	178	60.0	177
465.tonto	327	30.1	327	30.1	326	30.1	278	35.4	278	35.3	279	35.3
470.lbm	31.8	432	32.0	429	31.6	434	31.8	432	32.0	429	31.6	434
481.wrf	159	70.3	157	71.0	158	70.7	159	70.3	157	71.0	158	70.7
482.sphinx3	334	58.3	333	58.5	334	58.3	332	58.7	334	58.4	334	58.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Zone reclaim mode enabled with:
echo 1 > /proc/sys/vm/zone_reclaim_mode
Intel Idle Driver disabled with the following Linux kernel parameter in /etc/grub.conf:
intel_idle.max_cstate=0
```

Platform Notes

```
BIOS setting:
Operating Mode set to Maximum Performance
Sysinfo program /home/SPECcpu-20140116-ic14.0/config/sysinfo.rev6874
$Rev: 6874 $ $Date:: 2013-11-20 #$ 654bd3fcf53b06faef0efe54ed011998
running on dx360M4 Wed Nov 19 11:18:52 2014
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 75.6

Lenovo System x iDataPlex dx360 M4
(Intel Xeon E5-2620 v2, 2.10 GHz)

SPECfp_base2006 = 73.0

CPU2006 license: 9017

Test date: Nov-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2620 v2 @ 2.10GHz
 2 "physical id"s (chips)
 24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 6
  siblings  : 12
  physical 0: cores 0 1 2 3 4 5
  physical 1: cores 0 1 2 3 4 5
 cache size : 15360 KB

```

```

From /proc/meminfo
MemTotal:      264642460 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux dx360M4 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Nov 17 15:39

```

SPEC is set to: /home/SPECcpu-20140116-ic14.0
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_td2-lv_home
                ext4      380G  175G  186G  49% /home

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS IBM -[TDE139OUS-1.50]- 02/21/2014

Memory:

16x Samsung M393B2G70QH0-CMA 16 GB 2 rank 1866 MHz, configured at 1600 MHz

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 75.6

Lenovo System x iDataPlex dx360 M4
(Intel Xeon E5-2620 v2, 2.10 GHz)

SPECfp_base2006 = 73.0

CPU2006 license: 9017

Test date: Nov-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

Platform Notes (Continued)

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/home/SPECcpu-20140116-ic14.0/libs/32:/home/SPECcpu-20140116-ic14.0/libs/64:/home/SPECcpu-20140116-ic14.0/sh"

OMP_NUM_THREADS = "12"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 75.6

Lenovo System x iDataPlex dx360 M4
(Intel Xeon E5-2620 v2, 2.10 GHz)

SPECfp_base2006 = 73.0

CPU2006 license: 9017

Test date: Nov-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

Base Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias
C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
Fortran benchmarks:
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch
Benchmarks using both Fortran and C:
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

Peak Compiler Invocation

C benchmarks:
icc -m64
C++ benchmarks:
icpc -m64
Fortran benchmarks:
ifort -m64
Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32
-ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 75.6

Lenovo System x iDataPlex dx360 M4
(Intel Xeon E5-2620 v2, 2.10 GHz)

SPECfp_base2006 = 73.0

CPU2006 license: 9017

Test date: Nov-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 75.6

Lenovo System x iDataPlex dx360 M4
(Intel Xeon E5-2620 v2, 2.10 GHz)

SPECfp_base2006 = 73.0

CPU2006 license: 9017

Test date: Nov-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-C.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Dec 30 16:10:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 30 December 2014.