



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2609 v3 @ 1.90GHz)

SPECint®\_rate2006 = 317

SPECint\_rate\_base2006 = 306

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

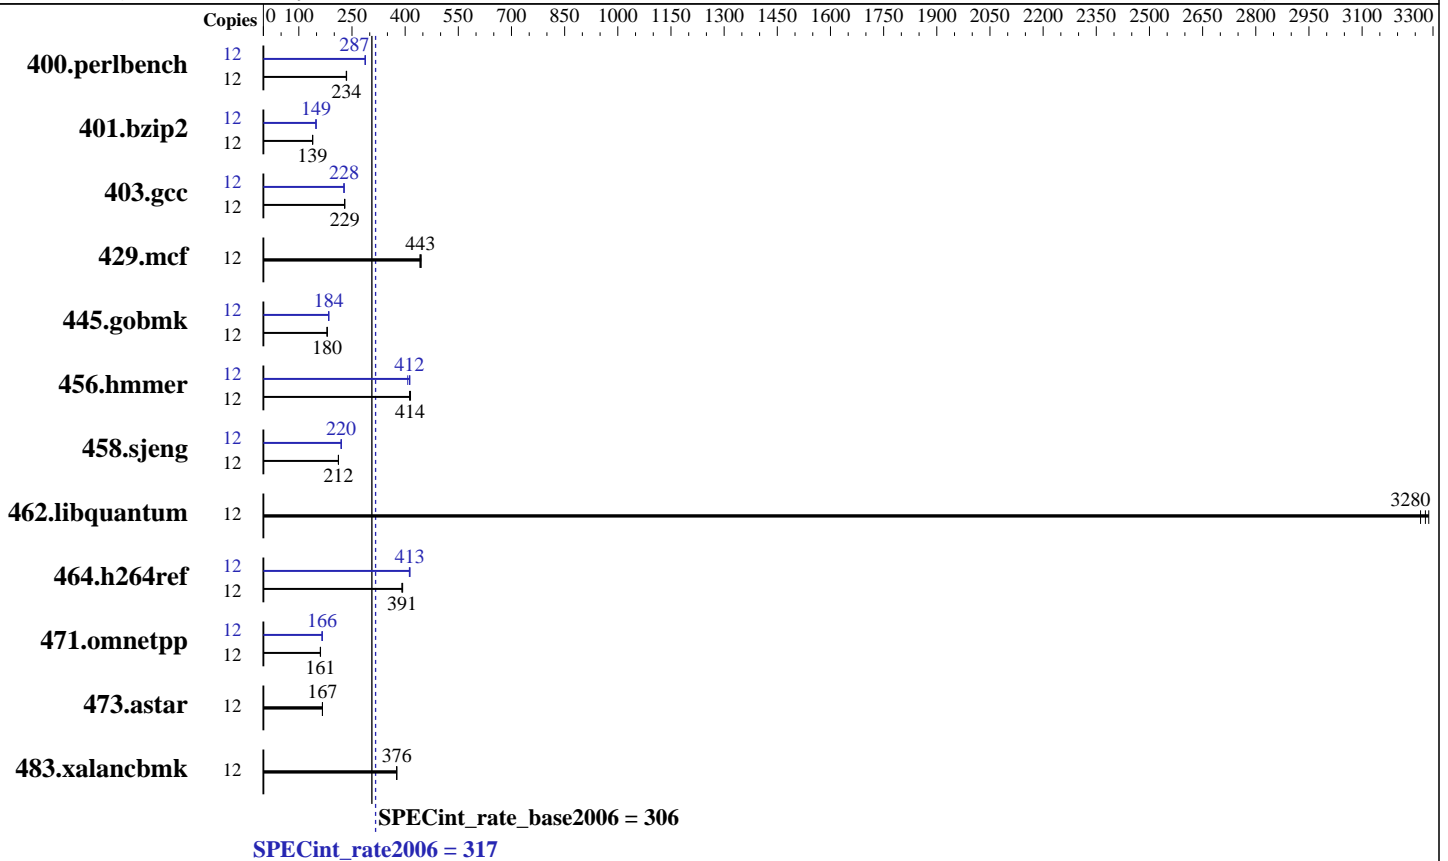

### Hardware

CPU Name: Intel Xeon E5-2609 v3  
 CPU Characteristics:  
 CPU MHz: 1900  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)  
 Disk Subsystem: 1 x 300GB SAS, 15K RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2609 v3 @ 1.90GHz)

SPECint\_rate2006 = 317

SPECint\_rate\_base2006 = 306

CPU2006 license: 9019  
Test sponsor: Cisco Systems  
Tested by: Cisco Systems

Test date: Dec-2014  
Hardware Availability: Sep-2014  
Software Availability: Nov-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	499	235	501	234	<b>500</b>	<b>234</b>	12	408	288	408	287	<b>408</b>	<b>287</b>
401.bzip2	12	832	139	835	139	<b>833</b>	<b>139</b>	12	780	148	<b>780</b>	<b>149</b>	779	149
403.gcc	12	<b>421</b>	<b>229</b>	422	229	420	230	12	424	228	<b>425</b>	<b>228</b>	425	227
429.mcf	12	248	442	246	445	<b>247</b>	<b>443</b>	12	248	442	246	445	<b>247</b>	<b>443</b>
445.gobmk	12	699	180	<b>699</b>	<b>180</b>	700	180	12	683	184	<b>683</b>	<b>184</b>	682	184
456.hammer	12	271	412	<b>271</b>	<b>414</b>	270	415	12	<b>272</b>	<b>412</b>	275	407	271	413
458.sjeng	12	<b>685</b>	<b>212</b>	687	211	685	212	12	660	220	662	219	<b>661</b>	<b>220</b>
462.libquantum	12	75.6	3290	<b>75.8</b>	<b>3280</b>	76.2	3260	12	75.6	3290	<b>75.8</b>	<b>3280</b>	76.2	3260
464.h264ref	12	676	393	679	391	<b>678</b>	<b>391</b>	12	642	413	645	412	<b>643</b>	<b>413</b>
471.omnetpp	12	467	161	465	161	<b>466</b>	<b>161</b>	12	451	166	454	165	<b>452</b>	<b>166</b>
473.astar	12	505	167	506	167	<b>505</b>	<b>167</b>	12	505	167	506	167	<b>505</b>	<b>167</b>
483.xalancbmk	12	220	376	<b>220</b>	<b>376</b>	220	376	12	220	376	<b>220</b>	<b>376</b>	220	376

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

CPU performance set to HPC  
Power Technology set to Custom  
Processor Power State C6 set to Disabled  
Energy Performance BIAS setting set to Performance  
Memory RAS configuration set to Maximum Performance  
Snoop Mode set to Early Snoop  
Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on rhel65 Sun Dec 14 13:06:07 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2609 v3 @ 1.90GHz  
2 "physical id"s (chips)

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2609 v3 @ 1.90GHz)

SPECint\_rate2006 = 317

SPECint\_rate\_base2006 = 306

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

### Platform Notes (Continued)

12 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 6
siblings  : 6
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      264261352 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux rhel65 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 14 12:54
```

```
SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb1       ext4  245G   28G  205G  12% /
```

```
Additional information from dmidecode:
BIOS Cisco Systems, Inc. C240M4.2.0.3c.0.091920142008 09/19/2014
Memory:
16x 0xCE00 M393A2G40DB0-CPB 16 GB 1600 MHz 2 rank
8x NO DIMM NO DIMM
```

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint\_rate2006 = 317

Cisco UCS C240 M4 (Intel Xeon E5-2609 v3 @ 1.90GHz)

SPECint\_rate\_base2006 = 306

CPU2006 license: 9019

Test date: Dec-2014

Test sponsor: Cisco Systems

Hardware Availability: Sep-2014

Tested by: Cisco Systems

Software Availability: Nov-2013

## General Notes (Continued)

```
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

400.perlbench: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint\_rate2006 = 317

Cisco UCS C240 M4 (Intel Xeon E5-2609 v3 @ 1.90GHz)

SPECint\_rate\_base2006 = 306

CPU2006 license: 9019

Test date: Dec-2014

Test sponsor: Cisco Systems

Hardware Availability: Sep-2014

Tested by: Cisco Systems

Software Availability: Nov-2013

## Peak Compiler Invocation (Continued)

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2609 v3 @ 1.90GHz)

**SPECint\_rate2006 = 317**

**SPECint\_rate\_base2006 = 306**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Dec-2014

**Hardware Availability:** Sep-2014

**Software Availability:** Nov-2013

## Peak Optimization Flags (Continued)

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Dec 30 16:13:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 30 December 2014.