



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Huawei

SPECfp<sup>®</sup>2006 = 68.9

Huawei RH1288A V2 (Intel Xeon E5-2650L v2)

SPECfp\_base2006 = 66.4

CPU2006 license: 3175


Test date: Sep-2014

Test sponsor: Huawei

Hardware Availability: Sep-2013

Tested by: Huawei

Software Availability: Nov-2013

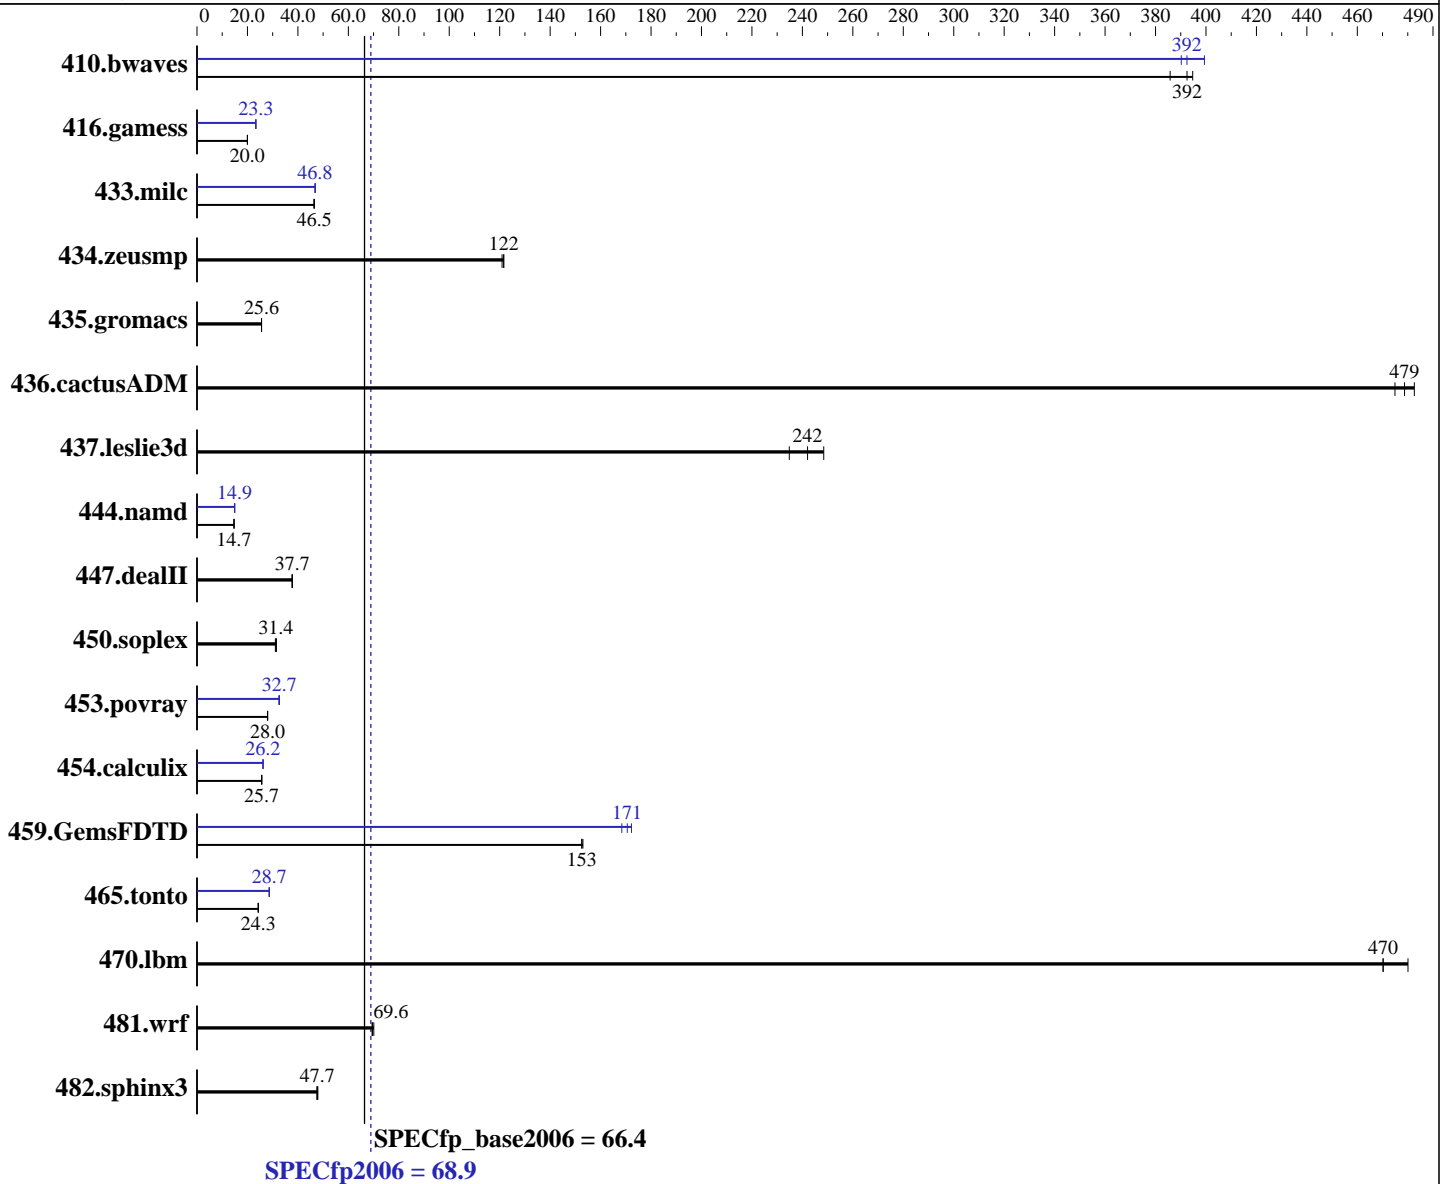

### Hardware

CPU Name: Intel Xeon E5-2650L v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.10 GHz  
 CPU MHz: 1700  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Huawei

SPECfp2006 = **68.9**

Huawei RH1288A V2 (Intel Xeon E5-2650L v2)

SPECfp\_base2006 = **66.4**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

L3 Cache: 25 MB I+D on chip per chip  
Other Cache: None  
Memory: 64 GB (8 x 8 GB 2Rx4 PC3-14900R-11, ECC, running at 1600 MHz)  
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b>34.6</b>	<b>392</b>	35.2	386	34.4	395	34.8	390	34.0	399	<b>34.6</b>	<b>392</b>
416.gamess	<b>980</b>	<b>20.0</b>	980	20.0	979	20.0	<b>839</b>	<b>23.3</b>	840	23.3	839	23.3
433.milc	<b>198</b>	<b>46.5</b>	198	46.5	198	46.4	<b>196</b>	<b>46.8</b>	196	46.8	196	46.8
434.zeusmp	<b>74.8</b>	<b>122</b>	74.8	122	75.2	121	<b>74.8</b>	<b>122</b>	74.8	122	75.2	121
435.gromacs	279	25.6	279	25.6	<b>279</b>	<b>25.6</b>	279	25.6	279	25.6	<b>279</b>	<b>25.6</b>
436.cactusADM	25.2	475	24.8	483	<b>25.0</b>	<b>479</b>	25.2	475	24.8	483	<b>25.0</b>	<b>479</b>
437.leslie3d	<b>38.8</b>	<b>242</b>	40.0	235	37.8	248	<b>38.8</b>	<b>242</b>	40.0	235	37.8	248
444.namd	546	14.7	546	14.7	<b>546</b>	<b>14.7</b>	537	14.9	537	14.9	<b>537</b>	<b>14.9</b>
447.dealII	303	37.7	<b>303</b>	<b>37.7</b>	303	37.8	303	37.7	<b>303</b>	<b>37.7</b>	303	37.8
450.soplex	265	31.5	268	31.1	<b>266</b>	<b>31.4</b>	265	31.5	268	31.1	<b>266</b>	<b>31.4</b>
453.povray	190	27.9	190	28.0	<b>190</b>	<b>28.0</b>	163	32.7	164	32.4	<b>163</b>	<b>32.7</b>
454.calculix	321	25.7	<b>322</b>	<b>25.7</b>	322	25.6	315	26.2	315	26.2	<b>315</b>	<b>26.2</b>
459.GemsFDTD	69.6	153	69.3	153	<b>69.5</b>	<b>153</b>	<b>62.2</b>	<b>171</b>	63.0	168	61.6	172
465.tonto	404	24.3	<b>405</b>	<b>24.3</b>	406	24.2	343	28.7	<b>343</b>	<b>28.7</b>	344	28.6
470.lbm	<b>29.2</b>	<b>470</b>	28.6	480	29.2	470	<b>29.2</b>	<b>470</b>	28.6	480	29.2	470
481.wrf	161	69.4	<b>161</b>	<b>69.6</b>	159	70.1	161	69.4	<b>161</b>	<b>69.6</b>	159	70.1
482.sphinx3	410	47.5	<b>409</b>	<b>47.7</b>	407	47.9	410	47.5	<b>409</b>	<b>47.7</b>	407	47.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Custom

Baseboard Management Controller used to adjust the fan speed to 100%

Sysinfo program /spec/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3

running on RH2288A Sat Sep 20 03:08:57 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 68.9

Huawei RH1288A V2 (Intel Xeon E5-2650L v2)

SPECfp\_base2006 = 66.4

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

## Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2650L v2 @ 1.70GHz

2 "physical id"s (chips)

20 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 10

siblings : 10

physical 0: cores 0 1 2 3 4 8 9 10 11 12

physical 1: cores 0 1 2 3 4 8 9 10 11 12

cache size : 25600 KB

From /proc/meminfo

MemTotal: 66118696 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d

Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/\*release\* /etc/\*version\*

redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)

system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:6server:ga:server

uname -a:

Linux RH2288A 2.6.32-431.el6.x86\_64 #1 SMP Sun Nov 10 22:19:54 EST 2013  
x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Sep 19 18:15

SPEC is set to: /spec

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	ext4	272G	96G	163G	37%	/

Additional information from dmidecode:

Memory:

8x Hynix HMT41GR7AFR8C-RD 8 GB 1867 MHz 2 rank

(End of data from sysinfo program)

Dmidecode mistakenly believes the memory was running at 1866 MHz, when it should only run at 1600 MHz

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,0,1"

LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64"

OMP\_NUM\_THREADS = "20"

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 68.9

Huawei RH1288A V2 (Intel Xeon E5-2650L v2)

SPECfp\_base2006 = 66.4

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

## General Notes (Continued)

Binaries compiled on a system with 2x Xeon X5645 CPU + 16GB memory using RHEL 6.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

The Huawei RH2288A V2 and Huawei RH1288A V2

are electronically equivalent.

The results have been measured on a Huawei RH2288A V2 model

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.deallI: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 68.9

Huawei RH1288A V2 (Intel Xeon E5-2650L v2)

SPECfp\_base2006 = 66.4

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Sep-2014  
Hardware Availability: Sep-2013  
Software Availability: Nov-2013

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 68.9

Huawei RH1288A V2 (Intel Xeon E5-2650L v2)

SPECfp\_base2006 = 66.4

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Huawei

**SPECfp2006 = 68.9**

Huawei RH1288A V2 (Intel Xeon E5-2650L v2)

**SPECfp\_base2006 = 66.4**

**CPU2006 license:** 3175

**Test sponsor:** Huawei

**Tested by:** Huawei

**Test date:** Sep-2014

**Hardware Availability:** Sep-2013

**Software Availability:** Nov-2013

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Jan 6 12:47:34 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 6 January 2015.