



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD350 (Intel Xeon E5-2640 v3, 2.60 GHz)

SPECfp<sup>®</sup>\_rate2006 = 592

SPECfp\_rate\_base2006 = 577

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Dec-2014

Hardware Availability: Dec-2014

Software Availability: Sep-2014

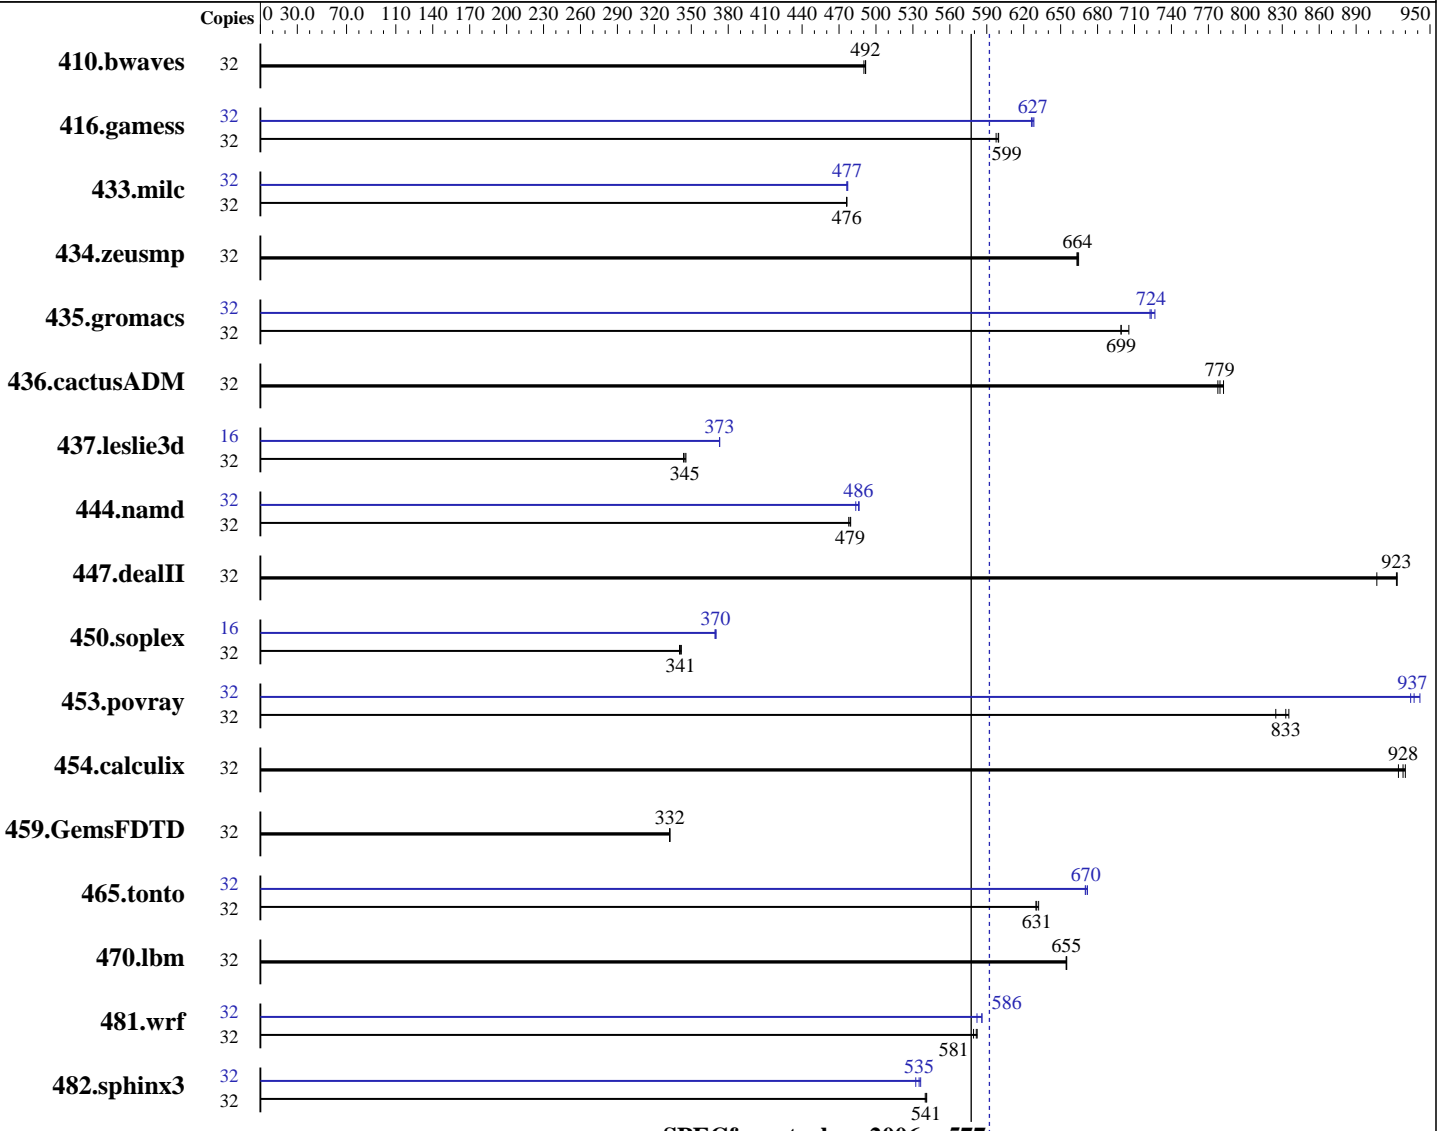

### Hardware

CPU Name: Intel Xeon E5-2640 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 3.10.0-123.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD350 (Intel Xeon E5-2640 v3, 2.60 GHz)

SPECfp\_rate2006 = 592

SPECfp\_rate\_base2006 = 577

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Dec-2014

Hardware Availability: Dec-2014

Software Availability: Sep-2014

L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)  
Disk Subsystem: 1 x 800 GB SATA SSD  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	885	492	887	490	<b>885</b>	<b>492</b>	32	885	492	887	490	<b>885</b>	<b>492</b>
416.gamess	32	<b>1046</b>	<b>599</b>	1045	600	1048	598	32	1000	626	<b>999</b>	<b>627</b>	997	628
433.milc	32	617	476	<b>617</b>	<b>476</b>	617	476	32	616	477	617	476	<b>616</b>	<b>477</b>
434.zeusmp	32	<b>439</b>	<b>664</b>	438	665	439	663	32	<b>439</b>	<b>664</b>	438	665	439	663
435.gromacs	32	<b>327</b>	<b>699</b>	327	699	324	705	32	<b>316</b>	<b>724</b>	314	727	316	723
436.cactusADM	32	492	778	489	782	<b>491</b>	<b>779</b>	32	492	778	489	782	<b>491</b>	<b>779</b>
437.leslie3d	32	<b>872</b>	<b>345</b>	875	344	870	346	16	<b>403</b>	<b>373</b>	403	373	403	373
444.namd	32	537	478	535	479	<b>536</b>	<b>479</b>	32	528	486	531	484	<b>528</b>	<b>486</b>
447.dealII	32	396	923	404	907	<b>397</b>	<b>923</b>	32	396	923	404	907	<b>397</b>	<b>923</b>
450.soplex	32	781	342	<b>782</b>	<b>341</b>	784	340	16	361	369	<b>361</b>	<b>370</b>	360	370
453.povray	32	<b>204</b>	<b>833</b>	206	825	204	835	32	182	934	181	942	<b>182</b>	<b>937</b>
454.calculix	32	286	924	<b>284</b>	<b>928</b>	284	930	32	286	924	<b>284</b>	<b>928</b>	284	930
459.GemsFDTD	32	<b>1021</b>	<b>332</b>	1021	333	1021	332	32	<b>1021</b>	<b>332</b>	1021	333	1021	332
465.tonto	32	498	632	<b>499</b>	<b>631</b>	500	630	32	<b>470</b>	<b>670</b>	470	670	469	672
470.lbm	32	671	655	<b>672</b>	<b>655</b>	672	654	32	671	655	<b>672</b>	<b>655</b>	672	654
481.wrf	32	<b>615</b>	<b>581</b>	617	579	614	582	32	614	582	610	586	<b>610</b>	<b>586</b>
482.sphinx3	32	<b>1153</b>	<b>541</b>	1152	541	1155	540	32	1172	532	<b>1166</b>	<b>535</b>	1163	536

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp\_rate2006 = 592

Lenovo ThinkServer RD350 (Intel Xeon E5-2640 v3, 2.60 GHz)

SPECfp\_rate\_base2006 = 577

CPU2006 license: 9017

Test date: Dec-2014

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2014

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

### Platform Notes

BIOS configuration:

Cluster On Die set to Auto

Early Snoop set to Auto

Performance Profile set to Custom

ClE Support set to Disabled

Core C3 set to Disabled

Core C6 set to Disabled

Thermal Profile set to High Fan Speed

Memory Power Savings set to Disabled

Sysinfo program /usr/cpu2006/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 # \$ e3fbb8667b5a285932ceab81e28219e1

running on RD350 Tue Dec 23 20:52:35 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2640 v3 @ 2.60GHz

2 "physical id"s (chips)

32 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 8

siblings : 16

physical 0: cores 0 1 2 3 4 5 6 7

physical 1: cores 0 1 2 3 4 5 6 7

cache size : 20480 KB

From /proc/meminfo

MemTotal: 263858144 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux Server"

VERSION="7.0 (Maipo)"

ID="rhel"

ID\_LIKE="fedora"

VERSION\_ID="7.0"

PRETTY\_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"

ANSI\_COLOR="0;31"

CPE\_NAME="cpe:/o:redhat:enterprise\_linux:7.0:GA:server"

redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)

system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:7.0:ga:server

uname -a:

Linux RD350 3.10.0-123.el7.x86\_64 #1 SMP Mon May 5 11:16:57 EDT 2014 x86\_64

x86\_64 x86\_64 GNU/Linux

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD350 (Intel Xeon E5-2640 v3, 2.60 GHz)

SPECfp\_rate2006 = 592

SPECfp\_rate\_base2006 = 577

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Dec-2014

Hardware Availability: Dec-2014

Software Availability: Sep-2014

## Platform Notes (Continued)

run-level 3 Dec 23 09:52

SPEC is set to: /usr/cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	xfs	741G	158G	584G	22%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS LENOVO VB3TS110 10/05/2014

Memory:

16x Micron 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz, configured at 1866 MHz

(End of data from sysinfo program)

RD350 support 4 channels and 8 DIMMs per processor, total 8 channels and 16 DIMMs. All 16 DIMM slots installed with 16 GB DIMM for this run.

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

Lenovo ThinkServer RD350 (Intel Xeon E5-2640 v3, 2.60 GHz)

**SPECfp\_rate2006 = 592**

**SPECfp\_rate\_base2006 = 577**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** Dec-2014

**Hardware Availability:** Dec-2014

**Software Availability:** Sep-2014

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias

C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias

Fortran benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks (except as noted below):  
icpc -m64

450.soplex: icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

Lenovo ThinkServer RD350 (Intel Xeon E5-2640 v3, 2.60 GHz)

**SPECfp\_rate2006 = 592**

**SPECfp\_rate\_base2006 = 577**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** Dec-2014

**Hardware Availability:** Dec-2014

**Software Availability:** Sep-2014

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -prof-gen(pass 1) -ipo -O3 -no-prec-div  
-prof-use(pass 2) -unroll2

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD350 (Intel Xeon E5-2640 v3, 2.60 GHz)

SPECfp\_rate2006 = 592

SPECfp\_rate\_base2006 = 577

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Dec-2014

Hardware Availability: Dec-2014

Software Availability: Sep-2014

## Peak Optimization Flags (Continued)

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto -inline-calloc -opt-malloc-options=3

### Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-HSW-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-HSW-revC.xml>



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD350 (Intel Xeon E5-2640 v3, 2.60 GHz)

SPECfp\_rate2006 = 592

SPECfp\_rate\_base2006 = 577

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** Dec-2014

**Hardware Availability:** Dec-2014

**Software Availability:** Sep-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Jan 14 10:28:36 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 13 January 2015.