SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL660c Gen8
(2.40 GHz, Intel Xeon E5-4650 v2)

SPECint®_rate2006 = 1520

SPECint_rate_base2006 = 1470

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Dec-2014
Hardware Availability: Aug-2014
Software Availability: Sep-2014

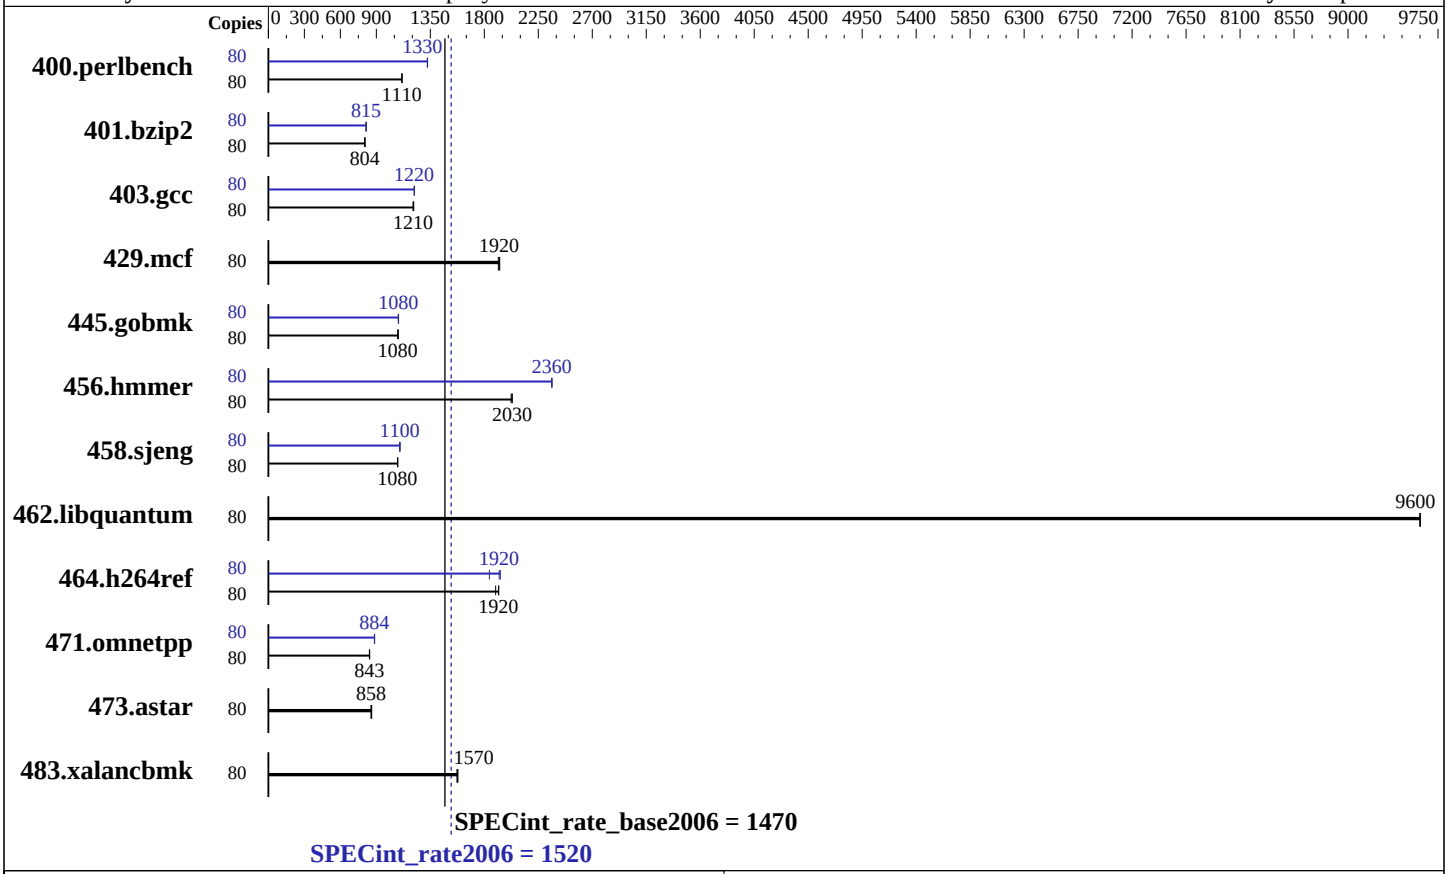

Hardware

CPU Name:	Intel Xeon E5-4650 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 2.90 GHz
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	40 cores, 4 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable:	2, 4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	25 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (32 x 8 GB 2Rx4 PC3-14900R-13, ECC)
Disk Subsystem:	2 x 300 GB 15K SAS, RAID 1
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.0 (Maipo) Kernel 3.10.0-123.el7.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL660c Gen8
(2.40 GHz, Intel Xeon E5-4650 v2)

SPECint_rate2006 = 1520

SPECint_rate_base2006 = 1470

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Dec-2014
Hardware Availability: Aug-2014
Software Availability: Sep-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	80	**702**	**1110**	702	1110	702	1110	80	**589**	**1330**	589	1330	590	1330
401.bzip2	80	958	806	961	803	**960**	**804**	80	**948**	**815**	949	814	946	816
403.gcc	80	531	1210	534	1210	**533**	**1210**	80	530	1220	529	1220	**529**	**1220**
429.mcf	80	378	1930	**379**	**1920**	381	1920	80	378	1930	**379**	**1920**	381	1920
445.gobmk	80	775	1080	**777**	**1080**	778	1080	80	773	1090	775	1080	**774**	**1080**
456.hmmer	80	**367**	**2030**	367	2030	369	2020	80	**316**	**2360**	316	2360	316	2360
458.sjeng	80	897	1080	**899**	**1080**	899	1080	80	882	1100	**883**	**1100**	885	1090
462.libquantum	80	**173**	**9600**	173	9600	173	9600	80	**173**	**9600**	173	9600	173	9600
464.h264ref	80	934	1890	**922**	**1920**	922	1920	80	916	1930	**920**	**1920**	961	1840
471.omnetpp	80	594	842	**593**	**843**	592	845	80	564	886	566	884	**566**	**884**
473.astar	80	656	856	**655**	**858**	652	861	80	656	856	**655**	**858**	652	861
483.xalancbmk	80	351	1570	**351**	**1570**	349	1580	80	351	1570	**351**	**1570**	349	1580

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Platform Notes

```
BIOS Configuration:
   HP Power Profile set to Maximum Performance
   Memory Power Savings Mode set to Maximum Performance
   Collaborative Power Control set to Disabled
   Thermal Configuration set so Maximum Cooling
   Processor Power and Utilization Monitoring set to Disabled
   Memory Refresh Rate set to 1x Refresh

 Sysinfo program /home/cpu/config/sysinfo.rev6914
 $Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
 running on pl26.epc.external.hp.com Tue Dec 16 10:11:54 2014
```

Continued on next page

Platform Notes (Continued)

```
This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-4650 v2 @ 2.40GHz
      4 "physical id"s (chips)
      80 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 10
      siblings  : 20
      physical 0: cores 0 1 2 3 4 8 9 10 11 12
      physical 1: cores 0 1 2 3 4 8 9 10 11 12
      physical 2: cores 0 1 2 3 4 8 9 10 11 12
      physical 3: cores 0 1 2 3 4 8 9 10 11 12
   cache size : 25600 KB

From /proc/meminfo
   MemTotal:       263930196 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.0 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="7.0"
      PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
      ANSI_COLOR="0;31"
      CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
   redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

uname -a:
   Linux pl26.epc.external.hp.com 3.10.0-123.el7.x86_64 #1 SMP Mon May 5
   11:16:57 EDT 2014 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Dec 16 10:06

SPEC is set to: /home/cpu
   Filesystem                Type  Size  Used Avail Use% Mounted on
   /dev/mapper/rootvg01-lv01 xfs   279G   37G  242G  14% /
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
```

Continued on next page

Platform Notes (Continued)

```
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS HP I32 08/03/2014
    Memory:
     32x HP 712382-071 8 GB 2 rank 1866 MHz

  (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu/libs/32:/home/cpu/libs/64:/home/cpu/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
memory using RedHat EL 7.0
```

Base Compiler Invocation

C benchmarks:
```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

C++ benchmarks:
```
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2)
`-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2)
`-auto-ilp32`

401.bzip2: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2)
`-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2)
`-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div`

Continued on next page

Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revD.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revD.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jan 27 13:34:30 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 January 2015.