SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10 PRO-7850B with Radeon R7 Graphics)

SPECint®_rate2006 = 69.9

SPECint_rate_base2006 = 68.5

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Nov-2014
Hardware Availability: Jul-2014
Software Availability: Oct-2013

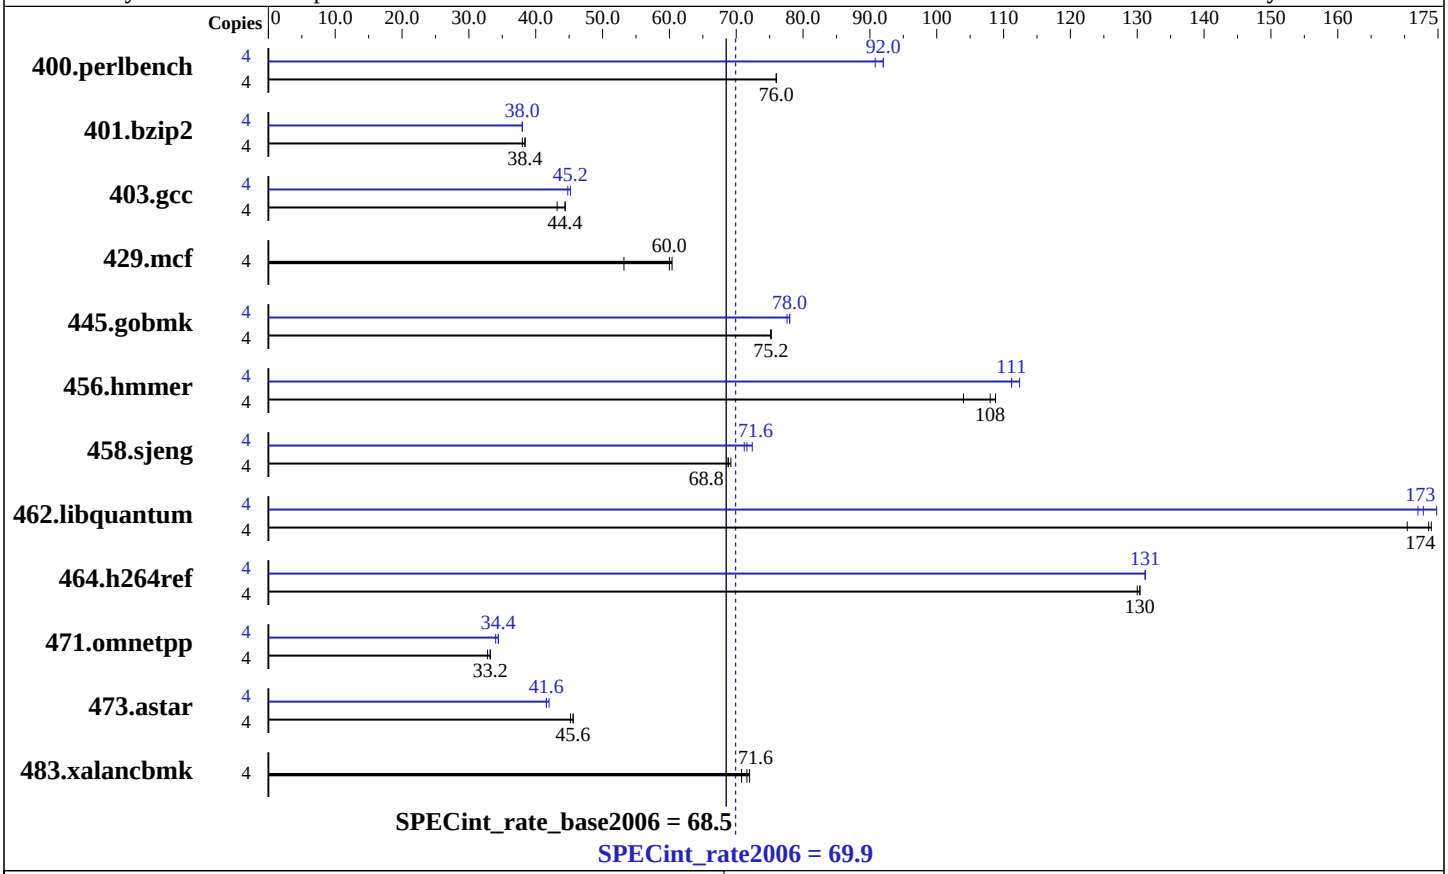

Hardware

CPU Name:	AMD A10 PRO-7850B
CPU Characteristics:	AMD Turbo CORE technology up to 4.00 GHz
CPU MHz:	3700
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	192 KB I on chip per chip, 96 KB I shared / 2 cores; 16 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	8 GB (2 x 4 GB 2Rx4 PC3-17000U-14)
Disk Subsystem:	160 GB Western Digital SATA HDD, 7200 RPM
Other Hardware:	None

Software

Operating System:	Microsoft Windows 8.1 Pro 6.3.9600 N/A Build 9600
Compiler:	C/C++: Version 14.0.1.139 of Intel C++ Studio XE for Windows; Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
Auto Parallel:	No
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

ASUS A88X-PRO Motherboard (AMD A10 PRO-7850B with Radeon R7 Graphics)

SPECint_rate2006 = 69.9

SPECint_rate_base2006 = 68.5

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Nov-2014
Hardware Availability: Jul-2014
Software Availability: Oct-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	515	76.0	514	76.0	**515**	**76.0**	4	430	90.8	**426**	**92.0**	424	92.0
401.bzip2	4	**1010**	**38.4**	1019	38.0	1010	38.4	4	1017	38.0	**1014**	**38.0**	1013	38.0
403.gcc	4	724	44.4	748	43.2	**726**	**44.4**	4	**710**	**45.2**	716	44.8	709	45.2
429.mcf	4	687	53.2	**606**	**60.0**	604	60.4	4	687	53.2	**606**	**60.0**	604	60.4
445.gobmk	4	558	75.2	**559**	**75.2**	559	75.2	4	540	77.6	538	78.0	**538**	**78.0**
456.hmmer	4	343	109	359	104	**345**	**108**	4	336	111	332	112	**336**	**111**
458.sjeng	4	703	68.8	**702**	**68.8**	699	69.2	4	678	71.2	669	72.4	**677**	**71.6**
462.libquantum	4	486	170	476	174	**478**	**174**	4	**479**	**173**	474	175	482	172
464.h264ref	4	680	130	**679**	**130**	679	130	4	**675**	**131**	675	131	674	131
471.omnetpp	4	759	32.8	**755**	**33.2**	752	33.2	4	732	34.0	726	34.4	**729**	**34.4**
473.astar	4	621	45.2	**618**	**45.6**	617	45.6	4	**674**	**41.6**	667	42.0	677	41.6
483.xalancbmk	4	**387**	**71.6**	384	72.0	391	70.8	4	**387**	**71.6**	384	72.0	391	70.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
To compile these binaries, the Intel Compiler 14.0 was set up to
generate 32-bit binaries with the command:
"ipsxe-comp-vars.bat ia32 vs2010" (shortcut provided in the Intel(r)
Parallel Studio XE 2013 program folder)
```

Submit Notes

```
Processes were bound to specific processors using the start command with the /affinity switch.
The config file option 'submit' was used to generate the affinity mask for each process.
```

Platform Notes

```
Sysinfo program C:\SPEC14.0/Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #$ \8787f7622badcf24e01c368b1db4377c
running on CltE03F49B01E0D Thu Nov  6 20:53:07 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

Trying 'systeminfo'
OS Name       : Microsoft Windows 8.1 Pro
OS Version    : 6.3.9600 N/A Build 9600
System Manufacturer: System manufacturer
System Model  : System Product Name
Processor(s)  : 1 Processor(s) Installed.
```

Continued on next page

Platform Notes (Continued)

```
     [01]: AMD64 Family 21 Model 48 Stepping 1 AuthenticAMD ~3700 Mhz
BIOS Version  : American Megatrends Inc. 1301, 6/24/2014
Total Physical Memory: 7,105 MB

Trying 'wmic cpu get /value'
DeviceID      : CPU0
L2CacheSize   : 25359
L3CacheSize   : 0
MaxClockSpeed : 3700
Name          : AMD A10 PRO-7850B R7, 12 Compute Cores 4C+8G
NumberOfCores : 2
NumberOfLogicalProcessors: 4

(End of data from sysinfo program)
```

Component Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit
```

Base Compiler Invocation

C benchmarks:
```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:
```
icl -Qvc10
```

Base Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DWIN32 -DSPEC_CPU_NO_INTTYPES`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Base Optimization Flags

C benchmarks:
```
/arch:AVX -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000
```

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
```
/arch:AVX -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F512000000 shlW32M.lib            -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icl -Qvc10 -Qstd=c99
```

456.hmmer: `C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe`

458.sjeng: `C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe`

462.libquantum: `C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe -Qstd=c99`

C++ benchmarks (except as noted below):
```
icl -Qvc10
```

473.astar: `C:\Program Files (x86)\Intel\Composer XE 2013 SP1/bin/intel64/icl.exe`

Peak Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
456.hmmer: `-DSPEC_CPU_P64`
458.sjeng: `-DSPEC_CPU_P64`
462.libquantum: `-DSPEC_CPU_P64`
464.h264ref: `-DWIN32 -DSPEC_CPU_NO_INTTYPES`
473.astar: `-DSPEC_CPU_P64`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

400.perlbench: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch /F512000000 shlW32M.lib -link /FORCE:MULTIPLE

401.bzip2: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias /F512000000

403.gcc: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

429.mcf: basepeak = yes

445.gobmk: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -Qauto-ilp32 /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

458.sjeng: -Qauto-ilp32 /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 /F512000000

462.libquantum: -Qauto-ilp32 /arch:AVX -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

464.h264ref: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-ra-region-strategy=block /F512000000 shlW32M.lib -link /FORCE:MULTIPLE

473.astar: -Qauto-ilp32 /arch:AVX -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000 shlW64M.lib -link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

Continued on next page

Peak Other Flags (Continued)

403.gcc: `-Dalloca=_alloca`

456.hmmer: `-link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD6`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64`

458.sjeng: `-link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD6`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64`

462.libquantum: `-link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD6`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64`

C++ benchmarks:

473.astar: `-link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013 SP1/compiler/lib/intel64`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD6`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib`
`-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jan 27 13:34:51 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 January 2015.