SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei CH220 V3 (Intel Xeon E5-2618L v3)

SPECint®_rate2006 = 674

SPECint_rate_base2006 = 647

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Jan-2015
Hardware Availability: Sep-2014
Software Availability: Sep-2014

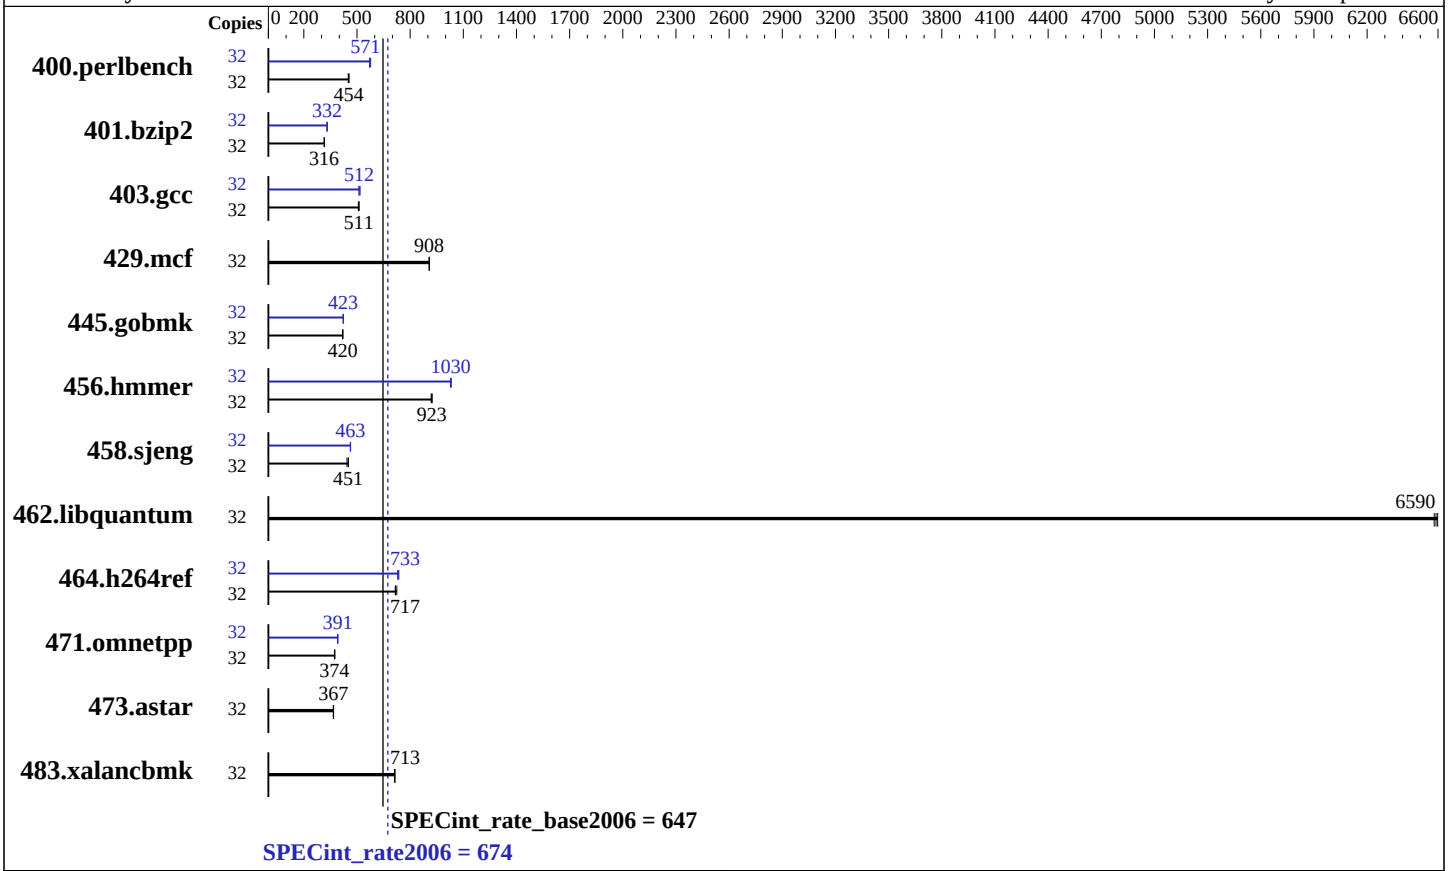

Hardware

CPU Name:	Intel Xeon E5-2618L v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.40 GHz
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	20 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)
Disk Subsystem:	1 x 500 GB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.0 (Maipo) 3.10.0-123.el7.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei CH220 V3 (Intel Xeon E5-2618L v3)

SPECint_rate2006 = 674

SPECint_rate_base2006 = 647

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Jan-2015
Hardware Availability: Sep-2014
Software Availability: Sep-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	688	455	694	451	**689**	**454**	32	547	571	542	577	**547**	**571**
401.bzip2	32	**978**	**316**	980	315	977	316	32	934	331	**931**	**332**	930	332
403.gcc	32	507	508	**504**	**511**	504	511	32	504	512	498	518	**503**	**512**
429.mcf	32	321	908	322	908	**321**	**908**	32	321	908	322	908	**321**	**908**
445.gobmk	32	**800**	**420**	799	420	800	419	32	794	423	795	422	**794**	**423**
456.hmmer	32	323	923	325	919	**323**	**923**	32	289	1030	**290**	**1030**	290	1030
458.sjeng	32	858	452	**859**	**451**	873	443	32	**836**	**463**	834	464	837	462
462.libquantum	32	101	6580	100	6600	**101**	**6590**	32	101	6580	100	6600	**101**	**6590**
464.h264ref	32	977	725	**988**	**717**	989	716	32	962	736	**966**	**733**	971	729
471.omnetpp	32	533	375	536	373	**535**	**374**	32	513	390	**511**	**391**	510	392
473.astar	32	613	367	610	368	**612**	**367**	32	613	367	610	368	**612**	**367**
483.xalancbmk	32	309	714	**310**	**713**	310	713	32	309	714	**310**	**713**	310	713

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Set Power Efficiency Mode to Custom
Set Snoop Mode to ES
Baseboard Management Controller used to adjust the fan speed to 100%
Sysinfo program /spec/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Sat Jan 24 12:09:38 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2618L v3 @ 2.30GHz
      2 "physical id"s (chips)
      32 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
```

Continued on next page

Platform Notes (Continued)

```
      following excerpts from /proc/cpuinfo might not be reliable.  Use with
      caution.)
         cpu cores : 8
         siblings  : 16
         physical 0: cores 0 1 2 3 4 5 6 7
         physical 1: cores 0 1 2 3 4 5 6 7
      cache size : 20480 KB

   From /proc/meminfo
      MemTotal:       263577520 kB
      HugePages_Total:       0
      Hugepagesize:       2048 kB

   From /etc/*release* /etc/*version*
      os-release:
         NAME="Red Hat Enterprise Linux Server"
         VERSION="7.0 (Maipo)"
         ID="rhel"
         ID_LIKE="fedora"
         VERSION_ID="7.0"
         PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
         ANSI_COLOR="0;31"
         CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
      redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
      system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
      system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

   uname -a:
      Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57
      EDT 2014 x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 Jan 22 07:02

   SPEC is set to: /spec
      Filesystem     Type  Size  Used Avail Use% Mounted on
      /dev/sda2      xfs   445G  126G  319G  29% /
   Additional information from dmidecode:

      Warning: Use caution when you interpret this section. The 'dmidecode' program
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

     BIOS Insyde Corp. 1.23 11/19/2014
     Memory:
      4x Micron 36ASF2G72PZ-2G1A2 16 GB 1 rank 2133 MHz, configured at 1867 MHz
      4x Micron 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz, configured at 1867 MHz
      4x Samsung M393A2G40DB0-CPB 16 GB 1 rank 2133 MHz, configured at 1867 MHz
      4x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at 1867 MHz

   (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

 Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
 memory using RedHat EL 7.0
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

C++ benchmarks:
```
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3
```

C++ benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Feb 25 11:28:58 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 February 2015.