SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei CH222 V3 (Intel Xeon E5-2630L v3)

SPECint®_rate2006 = 592

SPECint_rate_base2006 = 570

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Feb-2015
Hardware Availability: Sep-2014
Software Availability: Nov-2013

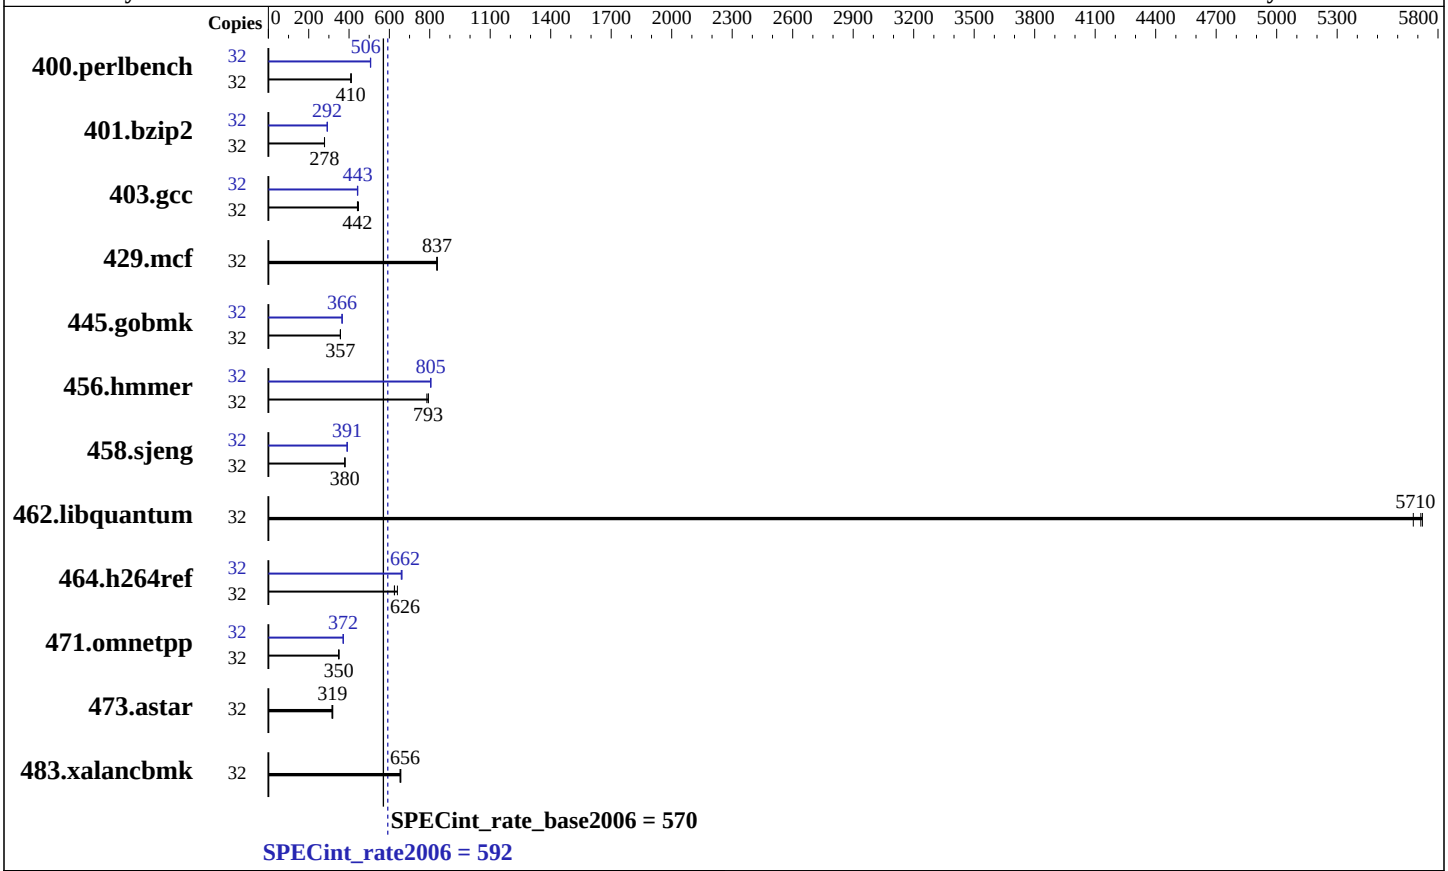

Hardware

CPU Name:	Intel Xeon E5-2630L v3
CPU Characteristics:	Intel Turbo Boost Technology up to 2.90 GHz
CPU MHz:	1800
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	20 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)
Disk Subsystem:	1 x 500 GB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei CH222 V3 (Intel Xeon E5-2630L v3)

SPECint_rate2006 = 592

SPECint_rate_base2006 = 570

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Feb-2015
Hardware Availability: Sep-2014
Software Availability: Nov-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	765	409	**763**	**410**	760	411	32	616	508	**618**	**506**	618	506
401.bzip2	32	1110	278	**1110**	**278**	1109	279	32	**1057**	**292**	1057	292	1057	292
403.gcc	32	**583**	**442**	583	442	577	447	32	582	443	583	442	**582**	**443**
429.mcf	32	348	838	**349**	**837**	350	835	32	348	838	**349**	**837**	350	835
445.gobmk	32	**940**	**357**	939	357	940	357	32	**918**	**366**	919	365	917	366
456.hmmer	32	380	786	376	793	**377**	**793**	32	370	806	371	804	**371**	**805**
458.sjeng	32	**1020**	**380**	1020	380	1022	379	32	991	391	990	391	**991**	**391**
462.libquantum	32	116	5720	**116**	**5710**	117	5680	32	116	5720	**116**	**5710**	117	5680
464.h264ref	32	**1132**	**626**	1107	640	1133	625	32	1075	659	1070	662	**1070**	**662**
471.omnetpp	32	**572**	**350**	571	350	574	348	32	540	371	**538**	**372**	538	372
473.astar	32	713	315	705	319	**705**	**319**	32	713	315	705	319	**705**	**319**
483.xalancbmk	32	**337**	**656**	336	656	338	653	32	**337**	**656**	336	656	338	653

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Set Power Efficiency Mode to Custom
Set Snoop Mode to ES
Set Hyper-Threading to Disabled
Set Patrol Scrub to Disable
Baseboard Management Controller used to adjust the fan speed to 100%
Sysinfo program /spec/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Sun Feb  1 23:37:25 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2630L v3 @ 1.80GHz
      2 "physical id"s (chips)
```

Continued on next page

Platform Notes (Continued)

```
        32 "processors"
     cores, siblings (Caution: counting these is hw and system dependent.  The
     following excerpts from /proc/cpuinfo might not be reliable.  Use with
     caution.)
        cpu cores : 8
        siblings  : 16
        physical 0: cores 0 1 2 3 4 5 6 7
        physical 1: cores 0 1 2 3 4 5 6 7
     cache size : 20480 KB

  From /proc/meminfo
     MemTotal:       264275292 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     Red Hat Enterprise Linux Server release 6.5 (Santiago)

  From /etc/*release* /etc/*version*
     redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
     system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

  uname -a:
     Linux localhost.localdomain 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54
     EST 2013 x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Feb 1 23:36

  SPEC is set to: /spec
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda1      ext4  268G  138G  117G  55% /

  Additional information from dmidecode:
    BIOS Insyde Corp. 1.13 08/12/2014
    Memory:
     8x NO DIMM NO DIMM     3 rank
     8x Samsung M393A2G40DB0-CPB 16 GB 1867 MHz 1 rank
     8x Samsung M393A2G40DB0-CPB 16 GB 1867 MHz 2 rank

  (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

  Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
  memory using RedHat EL 6.4
  Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Continued on next page

General Notes (Continued)

```
Filesystem page cache cleared with:
echo 1>       /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
The Huawei CH121 V3 and Huawei CH222 V3
are electronically equivalent.
The results have been measured on a Huawei CH121 V3 model
```

Base Compiler Invocation

C benchmarks:
```
icc  -m32
```

C++ benchmarks:
```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3
```

C++ benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc  -m32
```

Continued on next page

Peak Compiler Invocation (Continued)

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Feb 25 11:30:08 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 February 2015.