# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3650 M4 HD
(Intel Xeon E5-2643 v2, 3.50 GHz)

SPECint®2006 = 64.0

SPECint_base2006 = 59.7

**CPU2006 license:** 9017
**Test sponsor:** Lenovo Group Limited
**Tested by:** Lenovo Group Limited

**Test date:** Feb-2015
**Hardware Availability:** Dec-2013
**Software Availability:** Sep-2013

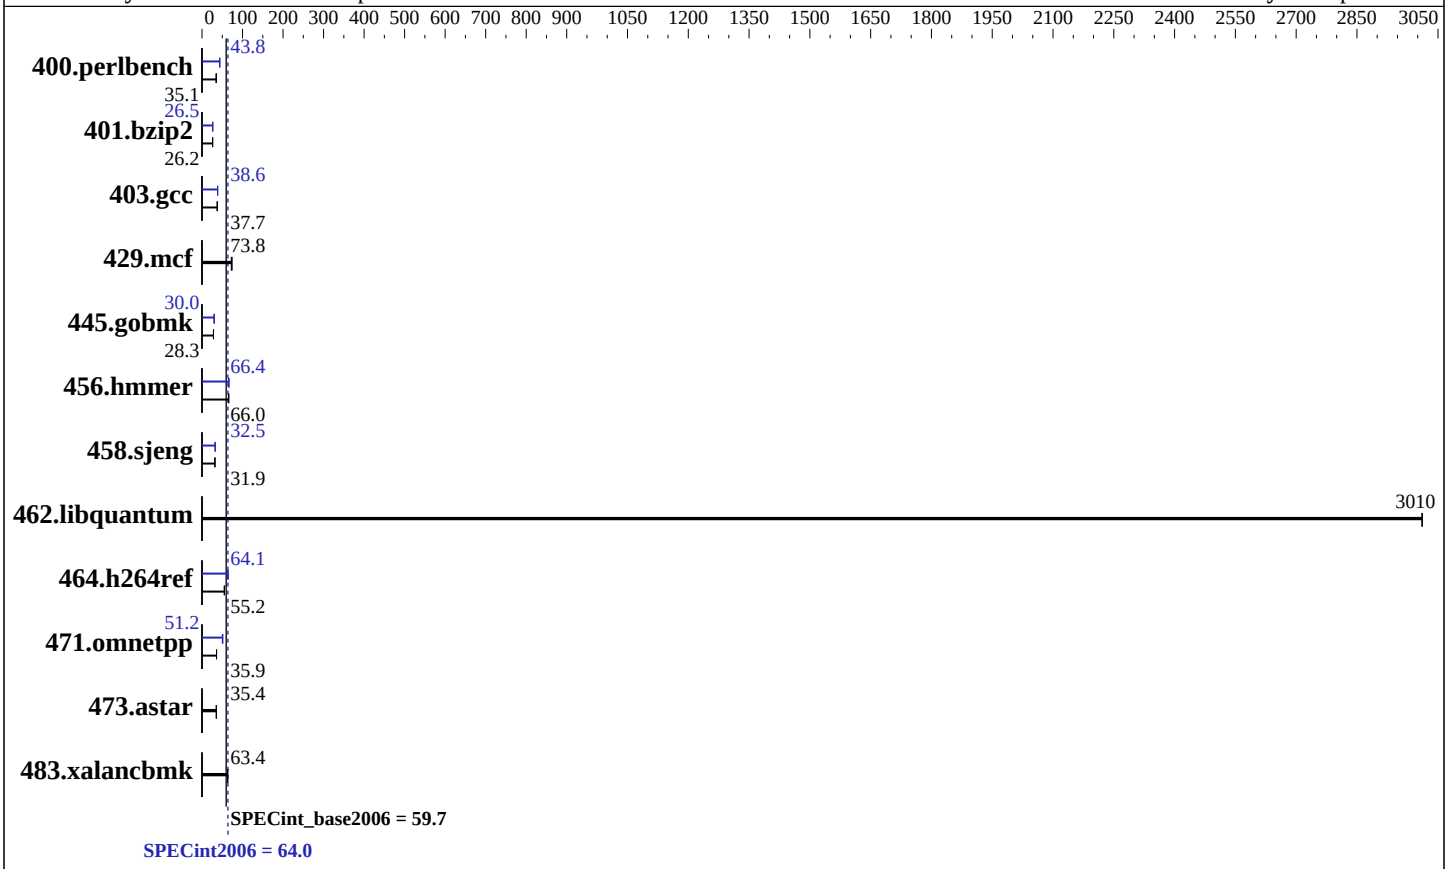


### Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon E5-2643 v2 |
| CPU Characteristics: | Intel Turbo Boost Technology up to 3.80 GHz |
| CPU MHz: | 3500 |
| FPU: | Integrated |
| CPU(s) enabled: | 12 cores, 2 chips, 6 cores/chip |
| CPU(s) orderable: | 1,2 chips |
| Primary Cache: | 32 KB I + 32 KB D on chip per core |
| Secondary Cache: | 256 KB I+D on chip per core |
| L3 Cache: | 25 MB I+D on chip per chip |
| Other Cache: | None |
| Memory: | 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC) |
| Disk Subsystem: | 1 x 400 GB SSD, RAID 0 |
| Other Hardware: | None |

### Software

| | |
|---|---|
| Operating System: | Red Hat Enterprise Linux Server release 6.4 (Santiago)<br>2.6.32-358.el6.x86_64 |
| Compiler: | C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux |
| Auto Parallel: | Yes |
| File System: | ext4 |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 32/64-bit |
| Peak Pointers: | 32/64-bit |
| Other Software: | Microquill SmartHeap V10.0 |

# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3650 M4 HD
(Intel Xeon E5-2643 v2, 3.50 GHz)

SPECint2006 = 64.0

SPECint_base2006 = 59.7

**CPU2006 license:** 9017
**Test sponsor:** Lenovo Group Limited
**Tested by:** Lenovo Group Limited

**Test date:** Feb-2015
**Hardware Availability:** Dec-2013
**Software Availability:** Sep-2013

## Results Table

| Benchmark | Base | | | | | | Peak | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 277 | 35.2 | **278** | **35.1** | 278 | 35.1 | 222 | 43.9 | 223 | 43.7 | **223** | **43.8** |
| 401.bzip2 | 368 | 26.2 | 369 | 26.2 | **368** | **26.2** | 365 | 26.4 | 364 | 26.5 | **365** | **26.5** |
| 403.gcc | 213 | 37.7 | **214** | **37.7** | 214 | 37.6 | **209** | **38.6** | 209 | 38.6 | 209 | 38.6 |
| 429.mcf | 126 | 72.2 | 124 | 73.8 | **124** | **73.8** | 126 | 72.2 | 124 | 73.8 | **124** | **73.8** |
| 445.gobmk | 371 | 28.3 | **371** | **28.3** | 370 | 28.3 | 350 | 30.0 | 350 | 30.0 | **350** | **30.0** |
| 456.hmmer | 143 | 65.1 | 141 | 66.1 | **141** | **66.0** | 140 | 66.4 | 142 | 65.8 | **141** | **66.4** |
| 458.sjeng | 380 | 31.9 | **380** | **31.9** | 380 | 31.9 | 372 | 32.5 | **372** | **32.5** | 372 | 32.5 |
| 462.libquantum | 6.88 | 3010 | 6.88 | 3010 | **6.88** | **3010** | 6.88 | 3010 | 6.88 | 3010 | **6.88** | **3010** |
| 464.h264ref | **401** | **55.2** | 401 | 55.3 | 401 | 55.1 | 345 | 64.1 | 346 | 64.0 | **345** | **64.1** |
| 471.omnetpp | 174 | 36.0 | **174** | **35.9** | 174 | 35.8 | **122** | **51.2** | 125 | 50.1 | 122 | 51.2 |
| 473.astar | 197 | 35.6 | **198** | **35.4** | 199 | 35.2 | 197 | 35.6 | **198** | **35.4** | 199 | 35.2 |
| 483.xalancbmk | **109** | **63.4** | 109 | 63.3 | 109 | 63.4 | **109** | **63.4** | 109 | 63.3 | 109 | 63.4 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Zone reclaim mode enabled with:
echo 1 > /proc/sys/vm/zone_reclaim_mode
Intel Idle Driver disabled with the following Linux kernel parameter in /etc/grub.conf:
intel_idle.max_cstate=0
```

## Platform Notes

```
 BIOS setting:
 Operating Mode set to Maximum Performance
Hyper-Threading set to Disabled
 Sysinfo program /home/SPECcpu-20140116-ic14.0/config/sysinfo.rev6874
 $Rev: 6874 $ $Date:: 2013-11-20 #$ 654bd3fcf53b06faef0efe54ed011998
 running on x3650M4HD Wed Feb 11 04:46:45 2015

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2643 v2 @ 3.50GHz
       2 "physical id"s (chips)
       12 "processors"
    cores, siblings (Caution: counting these is hw and system dependent.  The
    following excerpts from /proc/cpuinfo might not be reliable.  Use with
    caution.)
       cpu cores : 6
```

Continued on next page

## Platform Notes (Continued)

```
        siblings  : 6
        physical 0: cores 2 3 4 8 9 10
        physical 1: cores 2 3 4 8 9 10
     cache size : 25600 KB

  From /proc/meminfo
     MemTotal:       264655280 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     Red Hat Enterprise Linux Server release 6.4 (Santiago)

  From /etc/*release* /etc/*version*
     redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
     system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

  uname -a:
     Linux x3650M4HD 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
     x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Feb 10 23:30

  SPEC is set to: /home/SPECcpu-20140116-ic14.0
     Filesystem     Type    Size  Used Avail Use% Mounted on
     /dev/mapper/vg_x3650m4plus-lv_home
                    ext4    309G  223G   71G  77% /home
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS IBM -[VVE141DUS-1.73]- 07/31/2014
    Memory:
     8x Not Specified Not Specified
     16x Samsung M393B2G70QH0-CMA 16 GB 2 rank 1866 MHz, configured at 1867 MHz

  (End of data from sysinfo program)
```

## General Notes

```
 Environment variables set by runspec before the start of the run:
 KMP_AFFINITY = "granularity=fine,scatter"
 LD_LIBRARY_PATH = "/home/SPECcpu-20140116-ic14.0/libs/32:/home/SPECcpu-20140116-ic14.0/libs/64:/home/SPECcpu-20140116-ic14.0/sh"
 OMP_NUM_THREADS = "12"

  Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
  memory using RedHat EL 6.4
```

Continued on next page

## General Notes (Continued)

```
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:
```
icc  -m64
```

C++ benchmarks:
```
icpc -m64
```

## Base Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
471.omnetpp: `-DSPEC_CPU_LP64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

## Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64
```

## Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):
icpc -m64

471.omnetpp: icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
-opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias

Continued on next page

# Peak Optimization Flags (Continued)

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32 -ansi-alias`

458.sjeng: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll4`

462.libquantum: `basepeak = yes`

464.h264ref: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

# Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html`
`http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-C.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml`
`http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-C.xml`

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3650 M4 HD
(Intel Xeon E5-2643 v2, 3.50 GHz)

SPECint2006 = 64.0

SPECint_base2006 = 59.7

**CPU2006 license:** 9017
**Test sponsor:** Lenovo Group Limited
**Tested by:** Lenovo Group Limited

**Test date:** Feb-2015
**Hardware Availability:** Dec-2013
**Software Availability:** Sep-2013

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Mar 24 17:17:50 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 March 2015.