SPEC® CINT2006 Result

Hewlett-Packard Company

ProLiant DL580 Gen9
(2.50 GHz, Intel Xeon E7-8890 v3)

SPECint®_rate2006 = 2860

SPECint_rate_base2006 = 2750

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Apr-2015
Hardware Availability: May-2015
Software Availability: Oct-2014

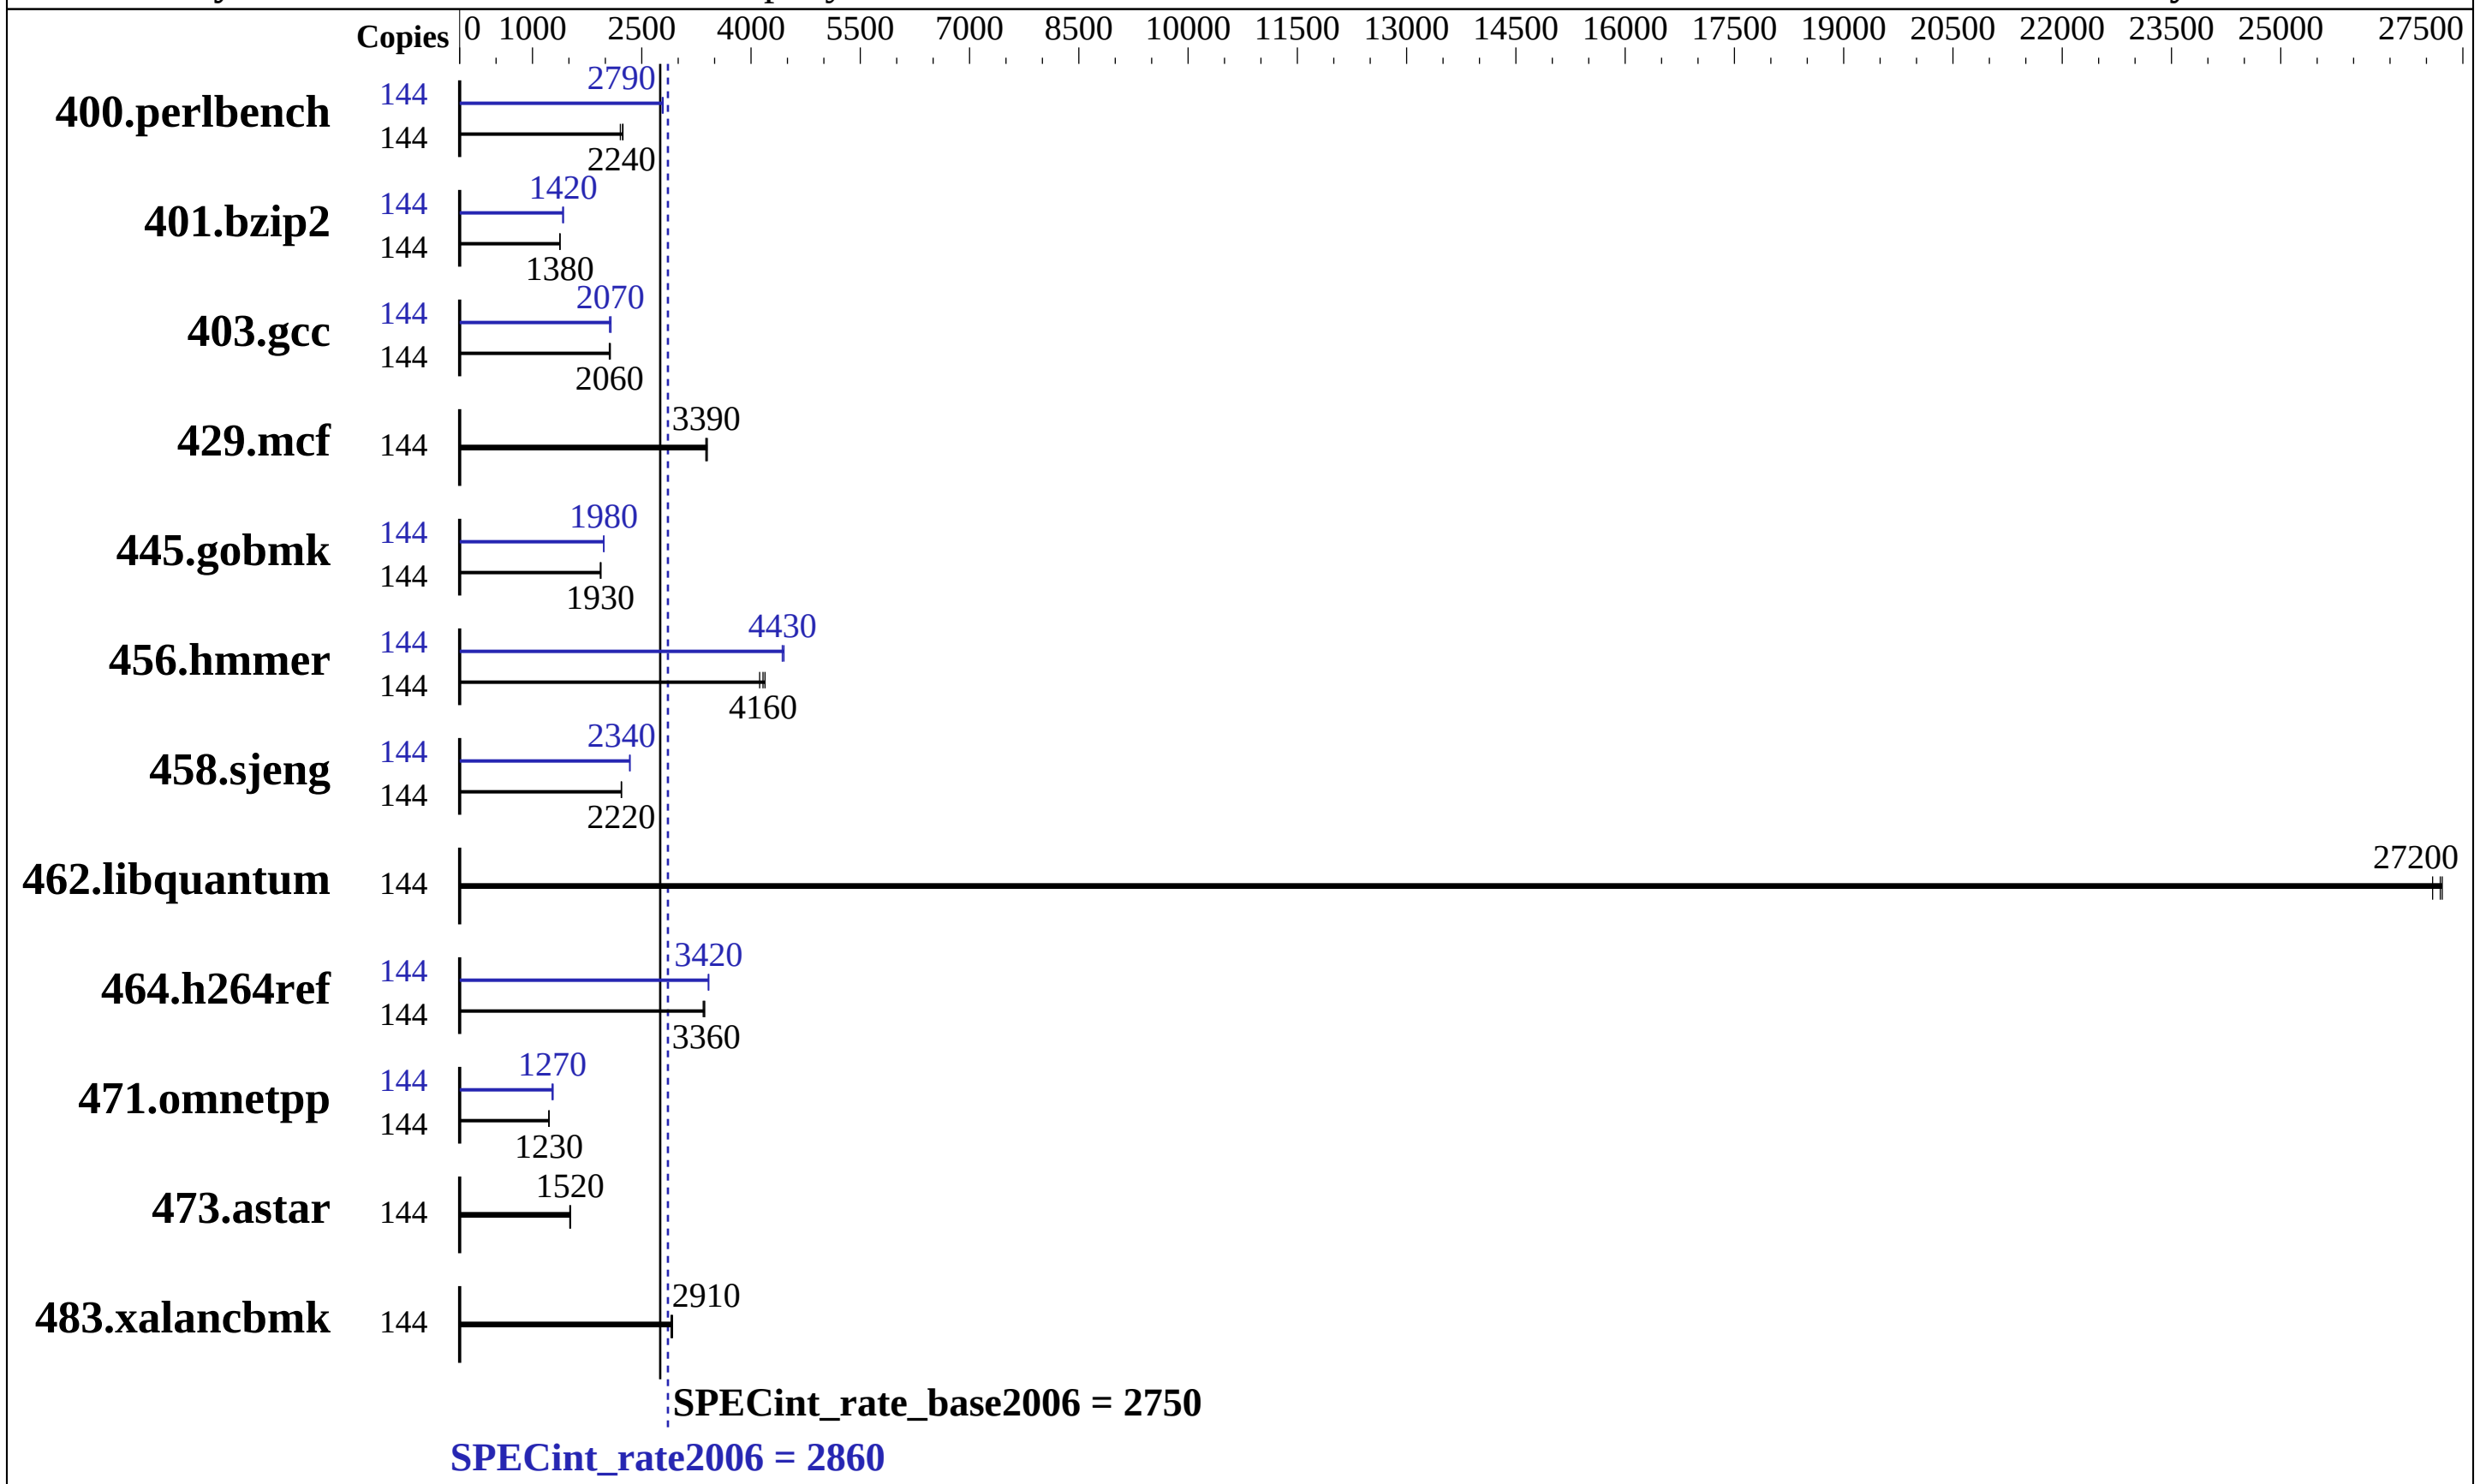

Hardware

CPU Name:	Intel Xeon E7-8890 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	72 cores, 4 chips, 18 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	45 MB I+D on chip per chip
Other Cache:	None
Memory:	512 GB (32 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem:	1 x 400 GB SAS SSD, RAID 0
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12 (x86_64) Kernel 3.12.28-4-default
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

Hewlett-Packard Company

ProLiant DL580 Gen9
(2.50 GHz, Intel Xeon E7-8890 v3)

SPECint_rate2006 = 2860

SPECint_rate_base2006 = 2750

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Apr-2015
Hardware Availability: May-2015
Software Availability: Oct-2014

Results Table

Benchmark	Base Copies	Base Seconds	Base Ratio	Base Seconds	Base Ratio	Base Seconds	Base Ratio	Peak Copies	Peak Seconds	Peak Ratio	Peak Seconds	Peak Ratio	Peak Seconds	Peak Ratio
400.perlbench	144	628	2240	638	2210	**629**	**2240**	144	506	2780	504	2790	**505**	**2790**
401.bzip2	144	1009	1380	1010	1380	**1010**	**1380**	144	976	1420	**977**	**1420**	983	1410
403.gcc	144	560	2070	564	2050	**563**	**2060**	144	563	2060	558	2080	**560**	**2070**
429.mcf	144	**388**	**3390**	386	3400	389	3380	144	**388**	**3390**	386	3400	389	3380
445.gobmk	144	778	1940	**781**	**1930**	781	1930	144	763	1980	**763**	**1980**	763	1980
456.hmmer	144	326	4120	321	4190	**323**	**4160**	144	303	4430	**303**	**4430**	302	4450
458.sjeng	144	785	2220	785	2220	**785**	**2220**	144	745	2340	747	2330	**745**	**2340**
462.libquantum	144	110	27100	110	27200	**110**	**27200**	144	110	27100	110	27200	**110**	**27200**
464.h264ref	144	953	3340	**950**	**3360**	947	3360	144	932	3420	934	3410	**932**	**3420**
471.omnetpp	144	735	1220	**733**	**1230**	733	1230	144	702	1280	709	1270	**707**	**1270**
473.astar	144	668	1510	**666**	**1520**	665	1520	144	668	1510	**666**	**1520**	665	1520
483.xalancbmk	144	**341**	**2910**	342	2900	340	2920	144	**341**	**2910**	342	2900	340	2920

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
 echo 1 >       /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Platform Notes

```
BIOS Configuration
  Power Profile set to Custom
  Power Regulator set to Static High Performance Mode
  Minimum Processor Idle Power Core C-State set to C6 State
  Minimum Processor Idle Power Package C-State set to No Package State
  Energy/Performance Bias set to Maximum Performance
  Collaborative Power Control set to Enabled
  Thermal Configuration set to Maximum Cooling
  Processor Power and Utilization Monitoring set to Disabled
  Memory Refresh Rate set to 1x Refresh
```

Continued on next page

Platform Notes (Continued)

```
Sysinfo program /cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on linux-t8cw Fri Apr 17 22:00:35 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E7-8890 v3 @ 2.50GHz
      4 "physical id"s (chips)
      144 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 18
      siblings  : 36
      physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
   cache size : 46080 KB

From /proc/meminfo
   MemTotal:       529309776 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 0
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12"
      VERSION_ID="12"
      PRETTY_NAME="SUSE Linux Enterprise Server 12"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12"

uname -a:
   Linux linux-t8cw 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
   (9879bd4) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Apr 17 21:59

SPEC is set to: /cpu2006
```

Continued on next page

Platform Notes (Continued)

```
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda3      xfs   371G  6.4G  364G   2% /
 Additional information from dmidecode:

    Warning: Use caution when you interpret this section. The 'dmidecode' program
    reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to
    hardware, firmware, and the "DMTF SMBIOS" standard.

   BIOS HP U17 03/13/2015
   Memory:
    64x UNKNOWN NOT AVAILABLE
    32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2133 MHz, configured at 1600 MHz

 (End of data from sysinfo program)
Regarding the sysinfo display about the memory installed, the correct amount of
memory is 512 GB and the dmidecode description should have one line reading as:
     32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2133 MHz, configured at 1600 MHz
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

 Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
 memory using RedHat EL 7.0
```

Base Compiler Invocation

C benchmarks:
`icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

C++ benchmarks:
`icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
```
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue May 5 15:16:01 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 May 2015.