SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M1, Intel Xeon E5-2643 v3, 3.4 GHz

SPECint®_rate2006 = 690

SPECint_rate_base2006 = 667

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Mar-2015
Hardware Availability: Feb-2015
Software Availability: Sep-2013

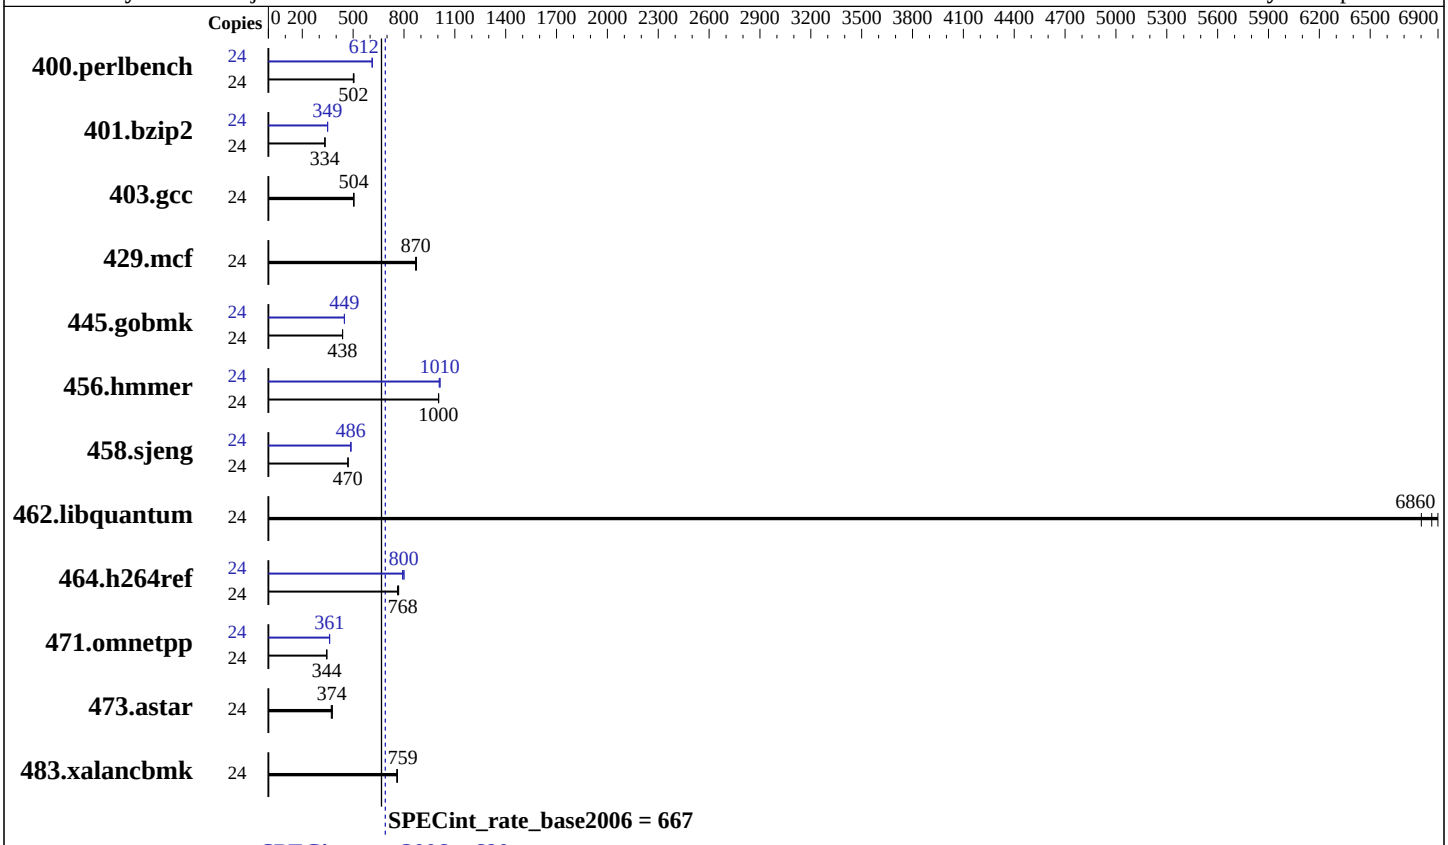

Hardware

CPU Name:	Intel Xeon E5-2643 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz:	3400
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	20 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem:	1 x SATA, 500 GB, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M1, Intel Xeon E5-2643 v3, 3.4 GHz

SPECint_rate2006 = 690

SPECint_rate_base2006 = 667

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Mar-2015
Hardware Availability: Feb-2015
Software Availability: Sep-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	468	501	**467**	**502**	464	505	24	382	614	**383**	**612**	383	612
401.bzip2	24	695	333	694	334	**694**	**334**	24	663	349	663	349	**663**	**349**
403.gcc	24	382	505	**384**	**504**	384	503	24	382	505	**384**	**504**	384	503
429.mcf	24	250	874	**252**	**870**	252	869	24	250	874	**252**	**870**	252	869
445.gobmk	24	575	438	575	438	**575**	**438**	24	561	448	561	449	**561**	**449**
456.hmmer	24	223	1000	223	1010	**223**	**1000**	24	**221**	**1010**	222	1010	221	1010
458.sjeng	24	617	470	**618**	**470**	619	469	24	597	486	596	487	**597**	**486**
462.libquantum	24	**72.5**	**6860**	73.1	6800	72.1	6900	24	**72.5**	**6860**	73.1	6800	72.1	6900
464.h264ref	24	697	762	**691**	**768**	691	768	24	**664**	**800**	671	791	664	800
471.omnetpp	24	**436**	**344**	437	344	435	345	24	414	362	416	360	**416**	**361**
473.astar	24	446	378	**451**	**374**	454	371	24	446	378	**451**	**374**	454	371
483.xalancbmk	24	218	758	217	762	**218**	**759**	24	218	758	217	762	**218**	**759**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Energy performance = Performance
QPI snoop mode: COD = disable, Early snoop = enable
CPU C1E Support = Disabled
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/ICC14.0-SPECcpu2006/libs/32:/ICC14.0-SPECcpu2006/libs/64:/ICC14.0-SPECcpu2006/sh"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RedHat EL 6.4
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
```

Continued on next page

General Notes (Continued)

```
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

For information about Fujitsu please visit: http://www.fujitsu.com
```

Base Compiler Invocation

C benchmarks:
```
icc  -m32
```

C++ benchmarks:
```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3
```

C++ benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc  -m32
```

400.perlbench: `icc -m64`

Continued on next page

Peak Compiler Invocation (Continued)

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

464.h264ref: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.html`
`http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revB.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.xml`
`http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revB.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue May 19 18:13:31 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 May 2015.