



SPEC[®] CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]2006 = **95.0**

PowerEdge FC830 (Intel Xeon E5-4627 v3, 2.60 GHz)

SPECfp_base2006 = **90.3**

CPU2006 license: 55


Test date: Feb-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Jun-2015

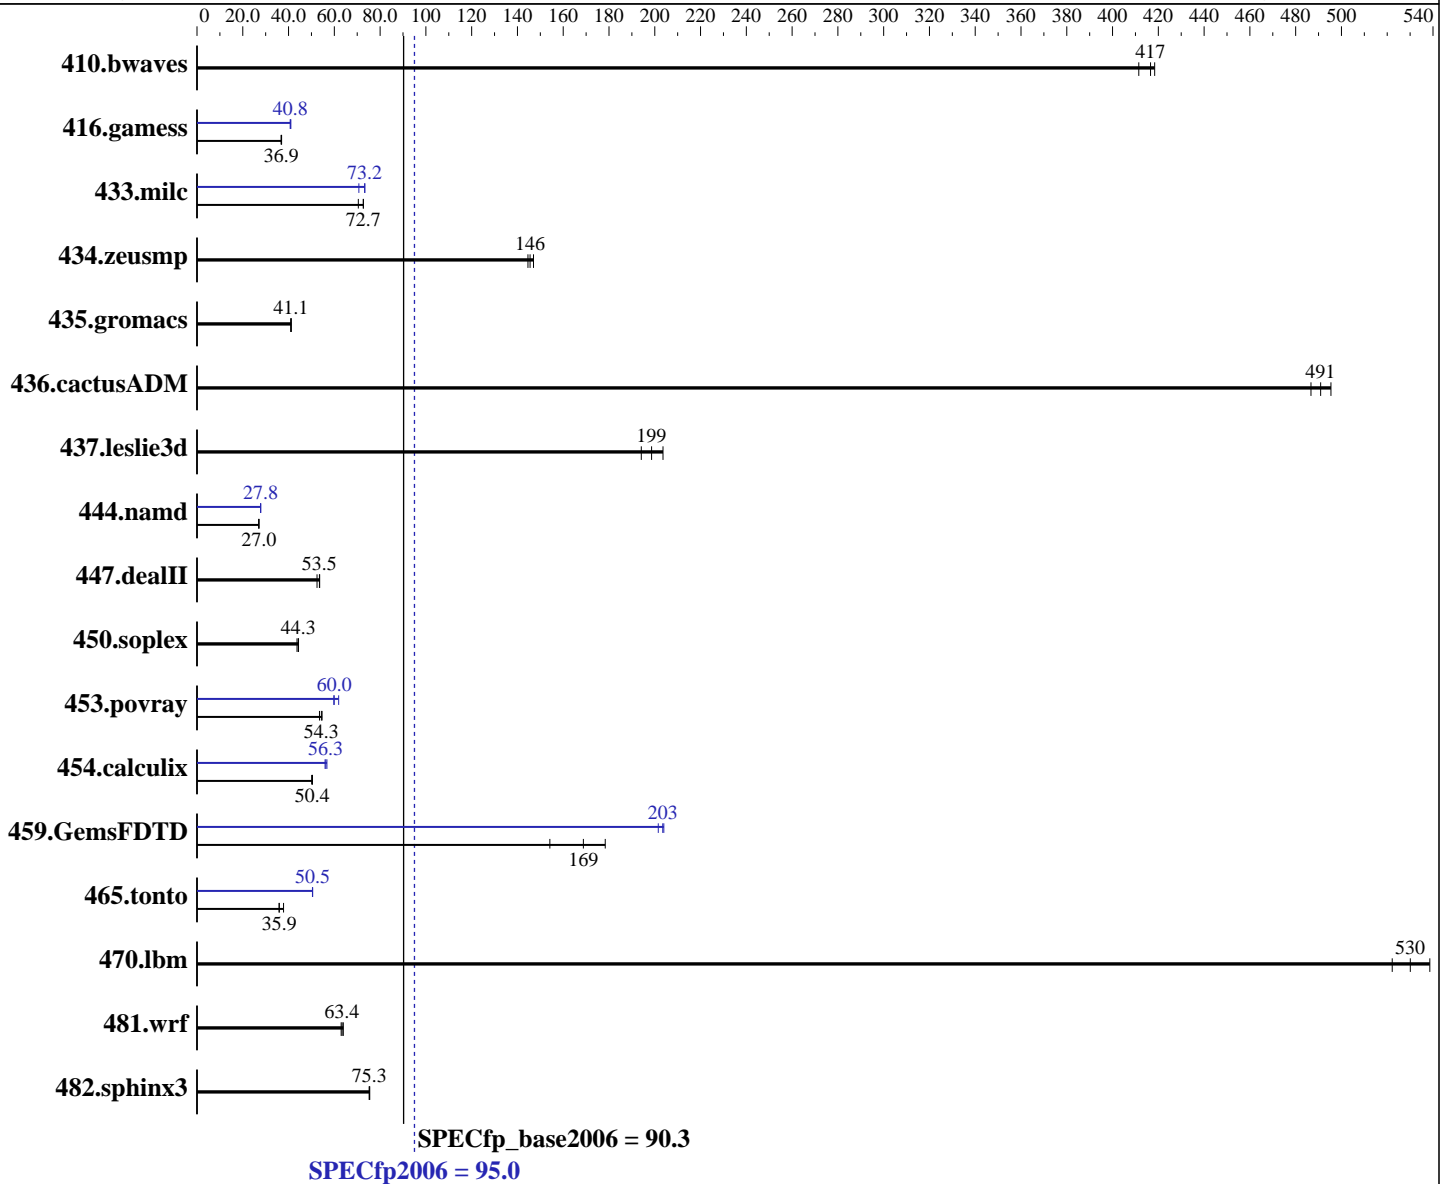

Hardware

CPU Name: Intel Xeon E5-4627 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip
 CPU(s) orderable: 4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12
 3.12.28-4-default
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 95.0

PowerEdge FC830 (Intel Xeon E5-4627 v3, 2.60 GHz)

SPECfp_base2006 = 90.3

CPU2006 license: 55

Test date: Feb-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Jun-2015

L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 1 x 400 GB 7200 RPM SATA
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<u>32.6</u>	<u>417</u>	32.5	418	33.0	411	<u>32.6</u>	<u>417</u>	32.5	418	33.0	411
416.gamess	533	36.7	530	37.0	<u>531</u>	<u>36.9</u>	<u>480</u>	<u>40.8</u>	480	40.8	477	41.0
433.milc	130	70.5	<u>126</u>	<u>72.7</u>	126	72.7	<u>125</u>	<u>73.2</u>	130	70.7	125	73.4
434.zeusmp	61.9	147	<u>62.5</u>	<u>146</u>	62.9	145	61.9	147	<u>62.5</u>	<u>146</u>	62.9	145
435.gromacs	<u>174</u>	<u>41.1</u>	174	41.1	174	41.0	<u>174</u>	<u>41.1</u>	174	41.1	174	41.0
436.cactusADM	<u>24.3</u>	<u>491</u>	24.1	495	24.6	487	<u>24.3</u>	<u>491</u>	24.1	495	24.6	487
437.leslie3d	46.2	204	<u>47.3</u>	<u>199</u>	48.4	194	46.2	204	<u>47.3</u>	<u>199</u>	48.4	194
444.namd	297	27.0	297	27.0	<u>297</u>	<u>27.0</u>	<u>289</u>	<u>27.8</u>	288	27.9	289	27.8
447.dealII	<u>214</u>	<u>53.5</u>	213	53.6	218	52.4	<u>214</u>	<u>53.5</u>	213	53.6	218	52.4
450.soplex	<u>188</u>	<u>44.3</u>	188	44.4	191	43.7	<u>188</u>	<u>44.3</u>	188	44.4	191	43.7
453.povray	99.4	53.5	97.4	54.6	<u>97.9</u>	<u>54.3</u>	86.0	61.9	89.0	59.8	<u>88.7</u>	<u>60.0</u>
454.calculix	<u>164</u>	<u>50.4</u>	164	50.4	165	50.1	<u>147</u>	<u>56.3</u>	147	56.0	145	56.8
459.GemsFDTD	59.5	178	68.8	154	<u>62.9</u>	<u>169</u>	52.0	204	52.6	202	<u>52.1</u>	<u>203</u>
465.tonto	<u>274</u>	<u>35.9</u>	260	37.8	274	35.9	195	50.4	195	50.5	<u>195</u>	<u>50.5</u>
470.lbm	26.3	522	25.5	539	<u>25.9</u>	<u>530</u>	26.3	522	25.5	539	<u>25.9</u>	<u>530</u>
481.wrf	175	63.9	<u>176</u>	<u>63.4</u>	177	63.0	175	63.9	<u>176</u>	<u>63.4</u>	177	63.0
482.sphinx3	<u>259</u>	<u>75.3</u>	259	75.3	258	75.5	<u>259</u>	<u>75.3</u>	259	75.3	258	75.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
 Snoop Mode set to Home Snoop
 Virtualization Technology disabled
 System Profile set to Performance
 Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914
 \$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
 running on linux-3aq4 Mon Feb 9 22:55:38 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 95.0

PowerEdge FC830 (Intel Xeon E5-4627 v3, 2.60 GHz)

SPECfp_base2006 = 90.3

CPU2006 license: 55

Test date: Feb-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Jun-2015

Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-4627 v3 @ 2.60GHz

4 "physical id"s (chips)

40 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 10

siblings : 10

physical 0: cores 0 1 2 3 4 8 9 10 11 12

physical 1: cores 0 1 2 3 4 8 9 10 11 12

physical 2: cores 0 1 2 3 4 8 9 10 11 12

physical 3: cores 0 1 2 3 4 8 9 10 11 12

cache size : 25600 KB

From /proc/meminfo

MemTotal: 529334376 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb_release -d

SUSE Linux Enterprise Server 12

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86_64)

VERSION = 12

PATCHLEVEL = 0

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12"

VERSION_ID="12"

PRETTY_NAME="SUSE Linux Enterprise Server 12"

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12"

uname -a:

Linux linux-3aq4 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014 (9879bd4) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Feb 9 17:20

SPEC is set to: /root/cpu2006-1.2

Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 ext4 267G 12G 254G 5% /

Additional information from dmidecode:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 95.0

PowerEdge FC830 (Intel Xeon E5-4627 v3, 2.60 GHz)

SPECfp_base2006 = 90.3

CPU2006 license: 55

Test date: Feb-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Jun-2015

Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 0.4.0 01/08/2015

Memory:

32x 00CE00B300CE M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz

16x Not Specified Not Specified

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

OMP_NUM_THREADS = "40"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 95.0

PowerEdge FC830 (Intel Xeon E5-4627 v3, 2.60 GHz)

SPECfp_base2006 = 90.3

CPU2006 license: 55

Test date: Feb-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Jun-2015

Base Portability Flags (Continued)

```

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 95.0

PowerEdge FC830 (Intel Xeon E5-4627 v3, 2.60 GHz)

SPECfp_base2006 = 90.3

CPU2006 license: 55

Test date: Feb-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Jun-2015

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 95.0

PowerEdge FC830 (Intel Xeon E5-4627 v3, 2.60 GHz)

SPECfp_base2006 = 90.3

CPU2006 license: 55

Test date: Feb-2015

Test sponsor: Dell Inc.

Hardware Availability: Jun-2015

Tested by: Dell Inc.

Software Availability: Jun-2015

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.20150421.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.20150421.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jun 2 12:38:06 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 June 2015.